


ISSUE 7.7

FIRE DETECTION

PRODUCT CATALOGUE

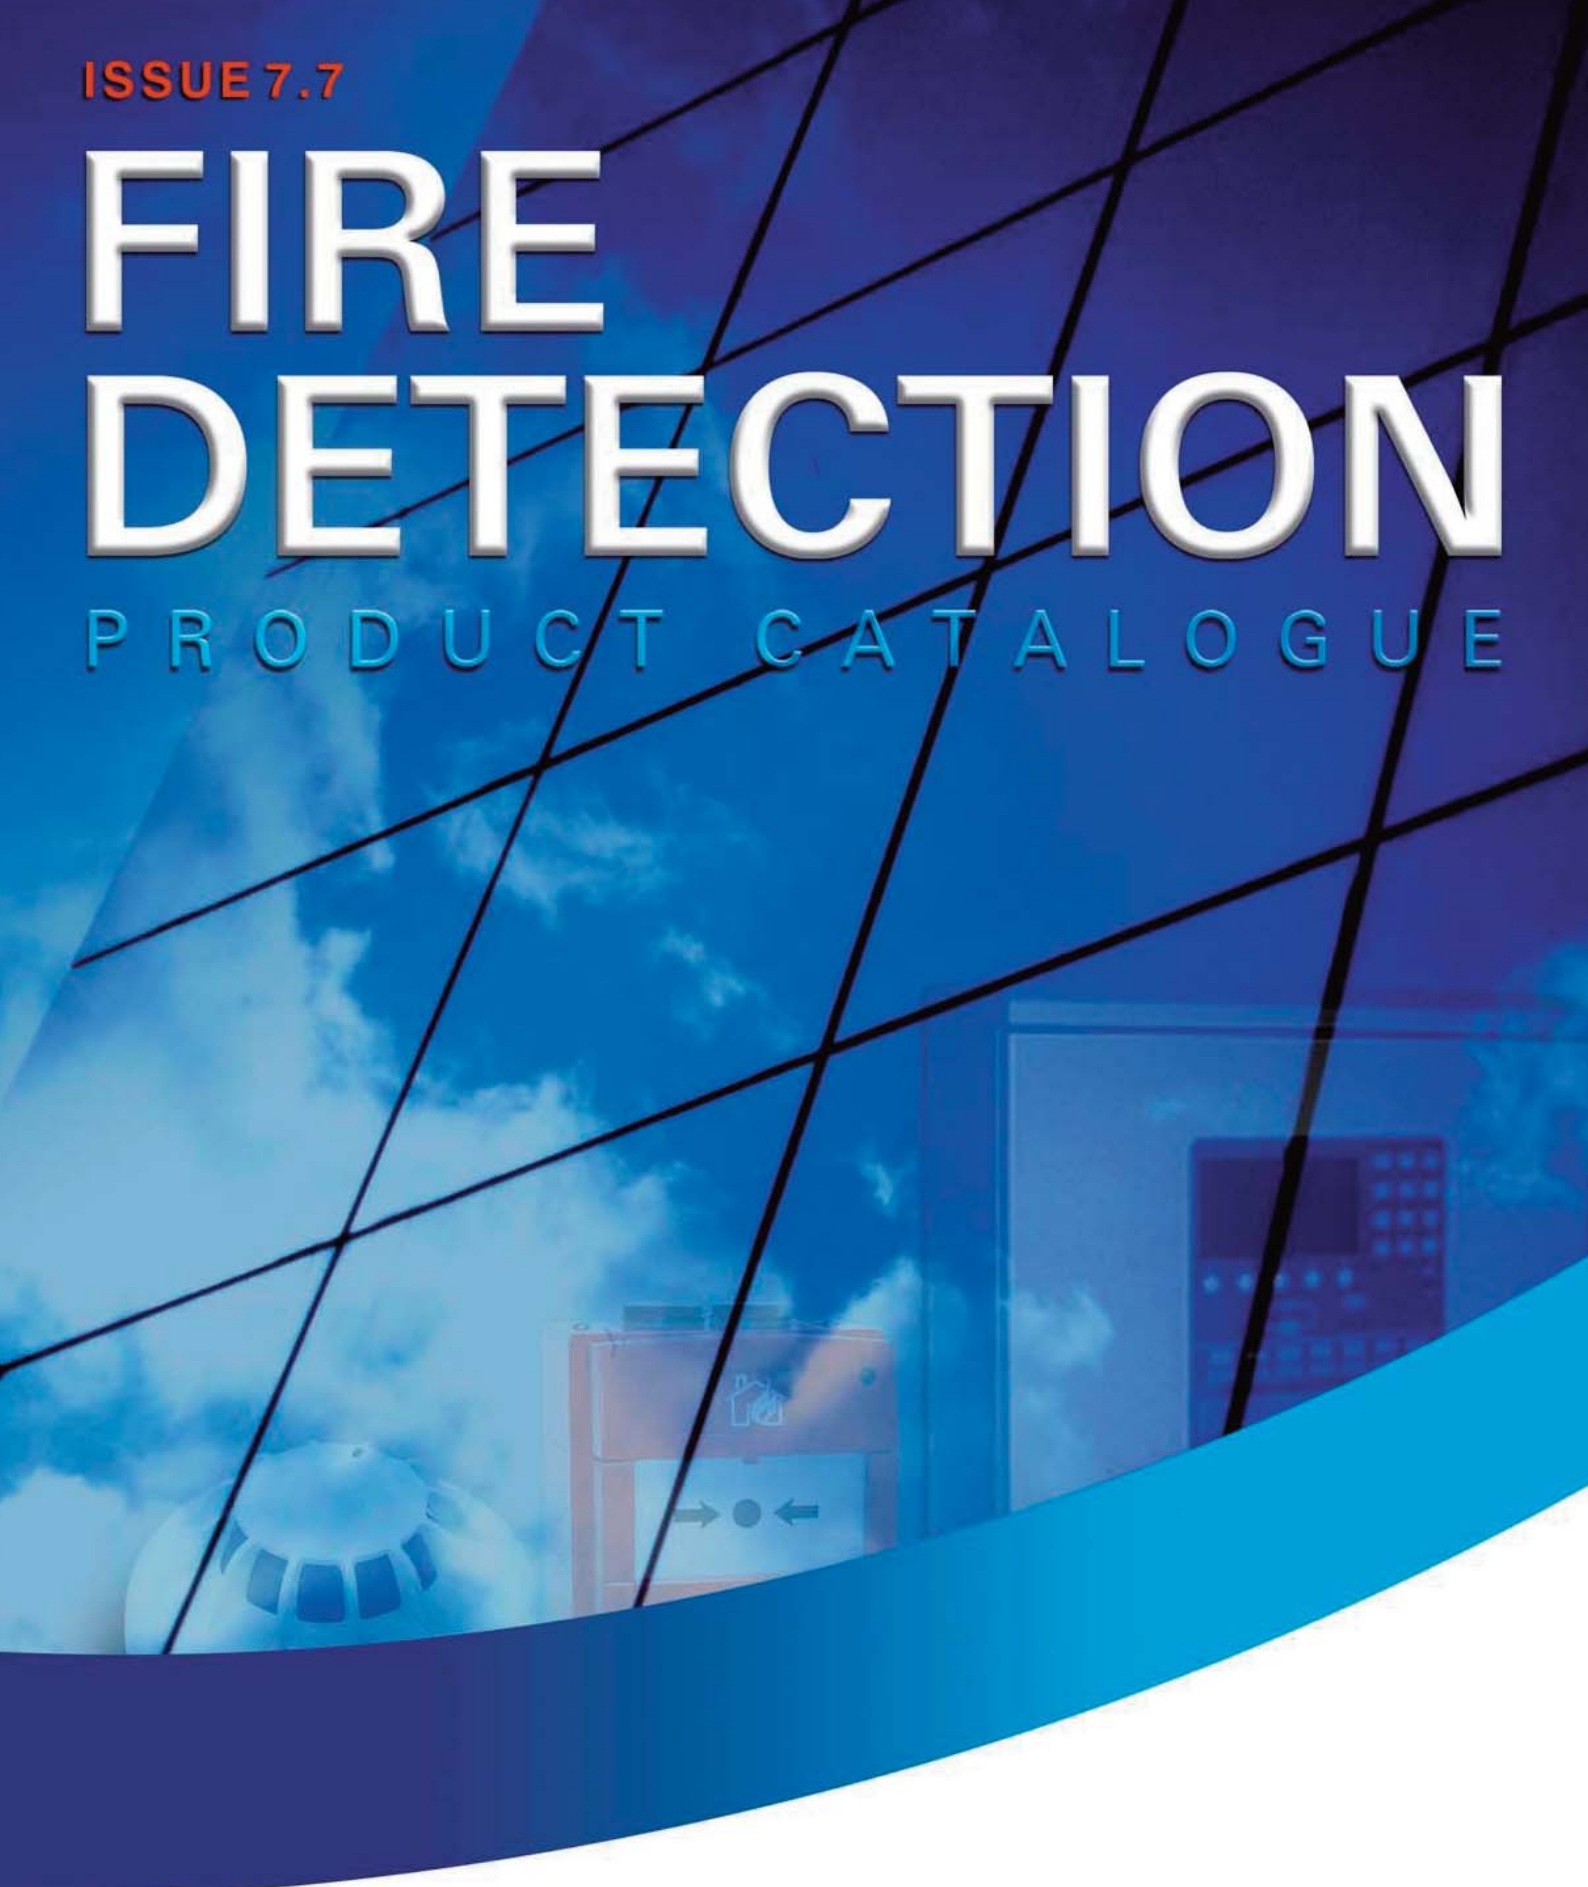

a vital part of your world

tyco
Safety Products

CONTENTS

Chapter 1 - Introduction	1.1	Chapter 8 - Fire Phones & Disable Refuge	8.1
Chapter 2 - MZX Technology	2.1	Chapter 9 - Water Leak Detection	9.1
• Minerva MZX Addressable Control Panels	2.2	Chapter 10 - Special Hazards	10.1
• Minerva MX2 Range	2.4	• Special Hazard Flame Detectors	10.3
• Minerva MX1000 & MX4000	2.5	• System 800 Fire Detection for Hazardous Areas	10.7
• Battery & Expansion Boxes	2.6	• System 620 Fire Detection for Hazardous Areas	10.13
• Minerva MX Repeaters	2.7	• MZX SensorLaser Plus Fibre Optic Linear Heat Detection System	10.24
• MZX4000 Black Box	2.8	Chapter 11 - Useful Information	11.1
• Minerva T2000 & T2000 CV Marine Detection Panels	2.9	• MX Addressable Detector, Mode Selection & Design Charts	11.1
• Minerva T2000R & T2000R CV Marine Repeaters	2.10	• Conventional Detector Selection & Design Charts	11.3
• MX Panel Components	2.13	• MKII Sounder Base Application Table	11.4
• DDA Compliant Pager	2.25	• Sounder Tone Tables	11.6
• MX Virtual Multi-Sensor Detectors	2.28	• Consultants Guide	11.8
• Beam and Linear Heat Detectors	2.32		
• Detector Bases & Accessories	2.35		
• Detector Ancillaries	2.39		
• Duct Probe Air Sampling	2.41		
• MX Addressable Input/Output Modules	2.43		
• MX Ancillary Housings	2.47		
• Callpoints	2.49		
• Sounders & Beacons	2.55		
• Software Tools & Accessories	2.69		
• MZX Interactive Training CD	2.70		
• Programming and Service Tools	2.72		
• Service & Spares	2.75		
Chapter 3 - Conventional Systems	3.1		
• Control Panels and Repeater Panels	3.1		
• DDA Compliant Pager	3.9		
• Point Detectors	3.11		
• Beam Detectors	3.16		
• Linear Heat Detectors	3.18		
• Detector Bases and Accessories	3.19		
• Duct Probes	3.23		
• Callpoints	3.25		
• Sounders & Beacons	3.32		
• Service & Spares	3.46		
Chapter 4 - Networks & Graphics	4.1		
• Tyco Expert Graphics (TXG)	4.1		
• MXNet	4.4		
• MX Minerva - Bridge	4.6		
Chapter 5 - Detector Test Equipment	5.1		
Chapter 6 - System Accessories	6.1		
• Batteries, PSU and Chargers	6.1		
• Door Release Units	6.3		
• Auxiliary Interface Relays	6.4		
• Fire Resistant Cable	6.5		
Chapter 7 - VESDA	7.1		
• LaserFOCUS Aspirating Smoke Detection	7.1		
• LaserCOMPACT and MX LaserCOMPACT	7.2		
• LaserPLUS Standard Modular Range	7.3		
• LaserPLUS Scanners	7.4		
• ICAM IAS Air Sampling Smoke Detection	7.7		
• Pipe and Fittings	7.8		

Fire Detection

Welcome to the latest issue of the Tyco Safety Products Fire Detection Catalogue of product available from our Letchworth U.K. distribution centre. This catalogue is intended to assist all sellers and system designers involved in fire detection from entry level conventional systems to extensive networked addressable systems and special hazard protection.

In line with our ISO 9000 accreditation, only those products that meet the highest quality criteria have been included.

Our goal is to despatch product on the same day as we receive your order. Our warranty and service returns policy is second to none. We recognise that your business is highly dependant on excellence in customer service and to help achieve this we offer extended warranty from many of our suppliers. Full credit is also available on a "No Question - No Fuss" basis for any new in-warranty product returned to the distribution centre.

New Catalogue Layout

With an emphasis on ease of use, the contents of this Issue has been arranged to meet the specific needs of individual users. Each section covers a different aspect of fire detection and contains all product associated with that subject. If a particular product is used for example with both conventional systems and addressable systems, it will appear in both sections. Each section can therefore be used independently and each section can also be downloaded separately from the Tyco Safety Products website. The 11 sections covered are;

1. Introduction
2. Addressable Systems
3. Conventional Systems
4. Networks & Graphics
5. Detector Test Equipment
6. System Accessories
7. Aspirating Systems
8. Fire Phones and Disabled Refuge
9. Water Leak Detection
10. Special Hazard
11. Useful Information

Website

The Tyco Safety Products website is full of up-to-date information including a section dedicated to fire detection products where you will find lots of useful information including;

Approval Certificates
AutoCAD Downloads
Catalogues
Datasheets
Forums
Marketing Bulletins
Presentations

Technical Information including;

User manuals
Application & Design Manuals
Installation Manuals
Commissioning Manuals
Service Manuals
Sales Information
Software Downloads

Contact Us

For further details on this catalogue, contact our customer telephone Help Line at Letchworth Customer Services on + 44 (0) 1462 66 77 00.

TFS Technical Support Call Centre:-

Direct: +31 475 352 722

Fax: +31 475 352 725

Hours: 9:00 to 19:00 CET, 8:00 to 18:00 GMT, 7:00 to 17:00 EET

UK only: 08701-238 787

Toll Free: 0800 CALL TYCO or (0800 22 55 89 26)

E-Mail: TSPEuropeSupport@tycoint.com

Our web site can be found at: www.tycoemea.com



This page is left intentionally blank.

MZX Detection Panels

Tyco MX detection panels use all the features of Tyco MX Technology to provide the latest fire detection technology meeting the latest worldwide standards in cost-effective, expandable packages.



Tyco MX detection panels support Tyco MX Technology:

- MX VIRTUAL Multi-sensor detectors
- MX DIGITAL high speed reliable digital protocol
- MX FASTLOGIC fuzzy logic smoke detection algorithms
- MX CCO universal carbon monoxide fire detection algorithms

Tyco MX detection panels provide modular cost effective solutions:

- Networked panels from 1 to 792 detection loops
- Powerful central loop processing functions
- Powerful and modular user interface
- MX REMOTE diagnostics and service functions
- TXG graphical user interfaces
- MZX, MX2 and designer housing options

Tyco MX detection panels provide long term fire detection solutions including upgrade paths from earlier panel models and a long term development strategy providing future upgrade paths.

Tyco MX detection panels include:

- MZX for compact single loop solutions
- MINERVA MX for EN54 LPCB approved systems
- MINERVA T2000 for Marine approved systems

Tyco MX detection panels include a powerful user interface:

- 640 Character display
- Displays first alarm and most recent alarm
- Permanently displays systems status including number of alarms, number of faults, number of isolated points
- Scroll function allows details of all events and status to be easily viewed
- Displays temperature, CO level and smoke level at point in alarm
- Displays 95 character custom messages for emergency procedures

Tyco MX panels include advanced manager and engineer functions including:

- Menu driven
- Multi-level password protected
- Viewing 3000 event log
- Detailed fault reporting
- Isolate by point, zone or sector
- Viewing and printing status
- Viewing and printing isolated points
- Manual and automatic walk test and reporting functions
- Viewing and printing maintenance reports
- Extensive diagnostic functions including simulation and force outputs
- Text and configuration changes/Automatic battery test
- Detector service functions

Tyco MX detection panels include very powerful event/action programming including:

- Seamless network wide event/action
- 240 x 240 Output map and output sequencing algorithms
- Over 3000 event/action groups for the most complex applications
- Templates for fast programming of standard applications including:
 - EN54/BS5839
 - EN54 Marine
- User defined templates
- Time, date and special day programming
- Wide range of co-incidence, double knock and delay functions



Features

- Supports one or two MXDigital® loops with 125, 250 or 500 addresses (panel dependant)
- 2km loop length
- High level User Interface with “Front Panel Controls” to reduce lifetime cost of ownership
- Wide range of detectors including the 3oTec triple sensing detector providing early detection without false alarms.
- Wide range of ancillaries including door control to BS7273 category A
- DDA compliance using AVBase and loop powered sounder beacons.
- Approved to EN54 the system is designed to be installed to BS5839 Part 2

Minerva® MZX Addressable Control Panels

This range of digital addressable fire control panels uses the well established MXDigital® Loop protocol, detectors, i/o modules, user interface and software from the MX range of panels. They provide a single box solution ideally suited for small and medium sized installations up to 32 zones.

The following models are available :-

- MZX125 Single Loop, 125 Addresses, 16 Zones
- MZX250 Single Loop, 250 Addresses, 32 Zones
- MZX251 Single Loop, 250 Addresses, 32 Zones
- MZX252 Two Loop, 500 Addresses, 32 Zones

The MZX125 housing has space for 2 x 12Ah batteries

The MZX250 housing has space for 2 x 17Ah batteries

The MZX251 & MZX252 housings have space for 2 x 38Ah batteries

Running the robust MXDigital® loop protocol the panels can operate using most cable types. This makes them ideal for upgrades as the existing cables can be utilised reducing installation time and cost.

All panels are complete with an integral PSU which will support a full compliment of loop powered sounders and beacons.

The MZX250, 251 & 252 control panels can be fitted with the TLI800 network interface module, This enables up to 99 control panels to be seamlessly networked, or to be added to an existing network of MX Fire controllers.

Repeaters

Two dedicated repeaters are available.

These repeaters offer the user full panel functionality. Up to 7 repeaters can be attached to the control panel's 2 wire remote bus, each repeater houses its own mains driven power supply and batteries.

MZX16R 16 Zones with space for 7Ah or 12Ah batteries

MZX32R 32 Zones with space for 17Ah batteries



Product Codes

- | | |
|-------------|---|
| 557.200.501 | MZX125 1 loop 16 Zone Fire Controller |
| 557.200.502 | MZX250 1 loop 32 Zone Fire Controller |
| 557.200.503 | MZX251 1 loop 32 Zone Fire Controller |
| 557.200.506 | MZX252 2 loop 32 Zone Fire Controller |
| 557.200.520 | MZX16R 16 Zone Repeater (mains powered) |
| 557.200.521 | MZX32R 32 Zone Repeater (mains powered) |
| 557.201.502 | Semi-Flush Bezel for MZX125/MZX16R |
| 557.201.501 | Semi-Flush Bezel for MZX250/251/252/MZX32R |
| 557.201.503 | Accessory mounting plate for std modules, IOB800, LIM800 and TUD800 (MZX250/251/252 only) |
| 557.201.504 | Accessory mounting plate for CCU3 (MZX250/251/252 only) |
| 557.201.307 | MZX250 17Ah Battery Clamp |
| 557.201.505 | MZX251/ 252 38Ah Battery Clamp |

Chapter 2 - MZX Technology

MZX Addressable Control Panels Technical Specifications

	MZX125	MZX250	MZX251	MZX252	MZX16R	MZX32R
Dimensions						
H x W x D mm	370x325x126	480x410x140	480x410x205	480x410x205	370x325x126	40x410x140
Weight	7kg	9.7kg	10.6kg	10.6kg	6.6kg	9.3kg
Operating Temp	-5°C +40°C					
Storage Temp	-20°C +70°C					
Humidity	90% relative Humidity Non Condensing					
Housing Colour	RAL7035					
Facia Colour	Pantone Grey 431C					
EMC/RFI	EN50130-4 & EN61000-6-3					
Supply Voltage	230VAC 50/60 Hz					
Input Current	0.9A	1.6A	1.6A	1.6A	0.9A	0.9A
Charger Size						
Note 1	2.5Ah	5.0Ah	5.0Ah	5.0Ah	2.5Ah	2.5Ah
Max Battery Size	2 x 12V 12Ah	2 x 12V 17Ah	2 x 12V 38Ah	2 x 12V 38Ah	2 x 12V 12Ah	2 x 12V 17Ah

Note 1 – Max PSE output current with the charger interrupted (I max b, EN54-4)



Minerva MX2 Range

The Minerva MX2 range of panels are intelligent LPCB EN54 compliant panels, which can be networked to provide up to 396 detection loops and installed to BS5839:Pt1 2002.

The MX2 design philosophy is to have a single panel housing that incorporates all the necessary components required to satisfy the most comprehensive of specifications. Additional matching ancillary housings can accommodate a range of standard modules, adjacent to or remote from the main controller.

- MX2 panels support two MX DIGITAL detection loops with up to 250 addressable devices per loop.
- MX2 panels can be expanded to eight loops supporting up to 1000 addressable devices.
- MX2 consists of a strong steel enclosure incorporating a removable chassis plate. The chassis plate holds:
- PSU830 5A 24Vdc battery back power supply and loop booster to EN54:pt.4.
- FIM800 field interface PCB incorporating two MX DIGITAL loops.
- CPU800 32 bit processor and memory card
- Optional network card and additional loop card(s)
- Optional IOB800 input/output expansion card

The panel has a removable steel front door, which incorporates the MX user interface and optional zonal LED's. The user interface has a 16 x 40-character backlit LCD display, simple alphanumeric keypad and 5 softkeys. All mandatory operator controls are provided with LED functions including Day/Night switching. One control key and 2 status indication LEDs are provided for site-specific functions.

Product Codes

557.200.203	MX2-210 Two loop c/w LEDs shallow housing	557.202.206	MX battery expansion aperture installation kit.
557.200.205	MX2-211 Two loop c/w LEDs deep housing	557.202.204	MX2 Battery housing
557.200.207	MX2-XB0 Expansion Box Shallow	557.202.205	MX2 Battery and Expansion Housing (65AH)
557.200.208	MX2-XB1 Expansion Box Deep	557.202.209	MX2 LCD Assembly (Spare)
557.200.209	MX2-FB Panel/repeater flush mounting bezel	557.202.208	MX2 8 Loop Expansion Kit
557.200.210	MX2-FBX Expansion box flush mounting bezel	557.202.200	DCM800 (Display + Control Module)
557.202.007	XLM800 Loop expansion module		
557.202.026	TLI800 MXNet network node interface module		
557.202.021	ANN840 LED Annunciator 40 way bi-colour		
557.202.022	ANN880 LED Annunciator 80 way		
557.202.020	COM820 Status command module 20 way		
557.202.024	PRN800 In-built thermal printer (expansion box)		
557.201.211	Ancillary/expansion board mounting kit		



Features

- Compact
- MX Technology Digital Loop
- LPCB Approved

Minerva MX1000 & MX4000

The MINERVA MX panels are intelligent LPCB EN54 approved panels, which can be networked to provide up to 792 detection loops and installed to BS5839:Pt.1.

- The MX1000 supports one MX DIGITAL detection loop with up to 250 addressable devices.
- The MX4000 supports two MX DIGITAL detection loops and can be expanded to eight loops supporting up to 1000 addressable devices.
- The MX1000 and MX4000 each provide up to 240 zones of detection

Both panels consist of a strong steel enclosure incorporating a removable chassis plate. The chassis plate holds:

- PSB800M 5A 24Vdc battery backed power supply and loop booster to EN54:pt.4
- FIM800 field interface PCB incorporating one or two MX DIGITAL loops
- CPU800 32 bit processor and memory card
- Optional network card and additional loop card(s)
- Optional IOB800 input/output expansion card

The panel has a strong cast aluminium front door, which incorporates a modular user interface that fully complies with EN54:pt.2. The user interface incorporates the ODM800 operator display module with a 16 x 40-character backlit LCD display, simple alphanumeric keypad, 5 softkeys. The OCM800 operator control module provides all mandatory operator control keys and LED functions including Day/Night switching. Two control keys and 2 indication LEDs are provided for site-specific functions. Control keys and LEDs are labelled in English according to the default LPCB functionality. The slide in decals can be reversed and alternative text added.

A maximum of 1200 digital INPUT/OUTPUT points can be provided via expansion boards connected to the remote bus.

Product Codes

Standard Panels

557.200.001	MX1000 Single Loop Panel – Shallow Back Box
557.200.002	MX1000 Single loop panel - Flush Back Box
557.200.003	MX4000 Two to Four Loop Panel – Shallow Back Box
557.200.004	MX4000 Two to Eight Loop Panel – Deep Back Box
557.200.009	MX4000 Two to Four Loop Panel - Flush Back Box

Options

557.202.006	IOB800 (8in/8out) expansion board (Max. 24 I/O on main panel 8in/16out)
557.202.007	XLM-MX two loop MX DIGITAL expansion card
557.202.026	TLI 800 ThornNet & MX-NET network card



Features

- Compact
- Low Cost Option
- Rack Mounting Kit

Battery & Expansion Boxes

The batteries and any additional zone LED's or operator controls and fireman's interface are mounted in a separate housing which can be mounted below the main panel or behind the panel. The matching battery and expansion box is available with shallow (17Ah) or deep backbox (38Ah) according to the batteries used.

The chassis plate in the battery box also has space for up to 2 x IOB800 input/output expansion modules (maximum 24 I/O) or 1 x MX FILNET or 1 x PSM/PSB800M.

Product Codes

557.200.005	MX-BBX 17Ah shallow expansion and battery box
557.200.019	MX-BBX-F 17Ah shallow flush expansion and battery box
557.200.006	MX-DPBX 38Ah deep expansion and battery box.
557.200.016	MX-BATT Deep Battery Box (322H x 442W x 217D mm)
572.065	MX Rack Mounting Kit for standard 19" racks



Features

- Fully Functional
- Flush or Surface Mounting
- Fully Monitored

Minerva MX Repeaters

The MINERVA MX full function repeater is an EN54 LPCB approved repeater with optional addressable EN54:Pt.4 power supply. The repeater consists of a steel backbox and cast aluminium front door which incorporates the ODM800 operator display module with a 16 x 40-character backlit LCD display, simple alphanumeric keypad and 5 softkeys. The OCM800 operator control module provides all mandatory operator control keys and LED functions including Day/Night switching. One control key and 2 indication LEDs are provided for site-specific functions.

Control keys and LEDs are labelled in English according to the default LPCB functionality. The slide in decals can be reversed and alternative text added.

Two power supply options are available for repeaters. The MXR incorporates an RSM800 repeater supply module for connection to a 24 Vdc supply. Or the MXR-PSU which incorporates a PSM800 power supply module for connection to a 120-240Vac mains supply and an APM800 addressable power monitor for connection to an MX addressable loop, providing power supply monitoring in accordance with EN54-pt.4.

The back box has a removable chassis plate with either the RSM800 or the PSM800 power supply. APM800 addressable PSU monitor and provides space for 2 x 7 Ah batteries to provide 72 h backup.

The MINERVA MX repeater is connected to the Panel via the remote bus (RS485, 1200 m distance). A maximum of 7 repeaters (including one MX REMOTE repeater) can be linked to each MINERVA MX panel and can provide full repeater functions for all panels on the system.

The operator control module (OCM800) can support up to 80 inputs and outputs in the form of LED annunciators, IOB800 input/output modules, or com 820 command modules.

Product Codes

Standard Repeaters

557.200.012	MXR Repeater with shallow backbox (24Vdc)
557.200.017	MXR-F Repeater with flush backbox (24Vdc)
557.200.013	MXR-PSU Repeater and addressable PSU (120-240 Vac)

Options

557.202.006	IOB-800 (8in/8out) expansion board
557.180.005	Mimic driver module
557.180.016	XIOM universal I/O module
557.202.028	RSM800 PSU Module (24Vdc)



Features

- 2 MZX detection loops as standard
- Expandable to 8 loops using XLM800
- Same loop power capability of standard MZX4000 panel/Reduces the cost of network systems
- Uses MXNet networks (network card supplied separately)
- Create a system of distributed loops to reduce installation costs
- Alarm, fault, power and system fault status display
- Single deep surface mount enclosure
- Integral power supply and space for 38AH batteries
- Distributed power supplies reduce cabling costs
- On board dual sounder circuits/Printer support at each black box
- Fully featured and supported remote bus at each black box-drive repeaters and mimic displays
- Download MX Consys configurations from any panel or black box on the network

MZX4000 Black Box

For situations where a networked MX Technology™ panel is not required to have a user interface an MZX4000 black box panel can be used. Black box panels consist of steel back boxes which house the FIM, processor board, power supply and optional network card and expansion loop card. The front cover is of steel construction and has a simple status display panel giving LED indication of alarm, fault, power and system fault.

MZX4000 black box panels are fully featured MZX Technology™ panels designed to be used on networked systems in situations where a local user interface is not required.

Technical Specification

Dimensions (mm):	640H X 440W X 230D
Aprox weight:	16Kg
Colour, housing & front cover:	Dawn Grey (BS 4800 10A)
Operating Temp:	Range -8°C to +55°C
Storage Temp:	-20°C to +70°C
Relative Humidity:	95% non condensing
Supply voltage:	120 to 240 Vac
Input current:	0.8 to 2.2A

Product Code

542.098 MZX4000 Black Box



Features

- PSB800M 5A 24V DC battery backed power supply and loop booster to EN54pt4
- FIM800 field interface PCB incorporating one or two MX DIGITAL loops
- CPU800 32 bit processor and memory card
- Optional network card and additional loop card(s) (T2000 only)
- VDR (Voyage Data Recorder) Interface as standard

Minerva T2000 and T2000 CV Marine Detection Panels

The T2000 is a fully Marine approved EN54 compliant 1 to 8 loop networkable detection panel. The T2000 supports two Tyco MX DIGITAL detection loops and can be expanded to eight loops supporting up to 1000 addressable devices. The T2000 consists of a strong stainless steel or mild steel Marine approved enclosure incorporating the above features.

The T2000CV is a 3 loop marine approved panel housed in a mild steel enclosure designed for use in commercial vessels.

All panels have a strong cast aluminium front door, which incorporates a modular user interface that fully complies with EN54 pt2. The user interface incorporates the ODM800 operator display module with a 16 x 40-character backlit LCD display, simple alphanumeric keypad and 5 softkeys.

The OCM800 operator control module provides all mandatory operator control keys and LED functions including Day/Night switching. One control key and 2 indication LEDs are provided for vessel specific functions. Control keys and LEDs are labelled in English according to the default Marine functionality. The slide in decals can be reversed and alternative text added.

The batteries and any additional zonal LED's or operator controls are mounted in a separate housing which can be mounted below the main panel or behind the panel. The battery box incorporates a heavy duty backbox and battery clamp.

The chassis plate in the battery box also has space for up to 2 x IOB800 input/output expansion modules (maximum 24 I/O) or 1 x PSM/PSB800M.



Product Codes

- | | |
|-------------|--|
| 557.200.600 | T2000 Two To Eight Loop Marine Panel (Stainless steel enclosure) |
| 557.200.602 | T2000B Battery Box (Stainless steel enclosure) |
| 557.200.610 | T2000 Standard Two to Eight Loop Marine Panel (Mild steel enclosure) |
| 557.200.605 | T2000 BM Battery Box (Mild steel enclosure) |
| 557.201.216 | T2000 XLM 8-Loop Mounting Kit |
| 557.200.620 | T2000CV 3 loop marine panel (mild steel back box) |
| 557.202.127 | VDR Cable For a Standalone panel, Com port 3 |
| 557.202.128 | VDR Cable for a networked system, Com port 1 |
| 557.180.454 | Marine Bulkhead Mount |
| 557.180.452 | Marine 19" rack mount kit for use with surface mounting housings |
| 557.180.022 | Terminal chamber PCB assembly |
| 557.201.233 | PSU 830 T2000/T2000R Conversion Kit |
| 557.201.234 | PSU 830 T2000 120VAC Kit |



Features

- Fully Functional
- Optional Approved Mild Steel Enclosure
- Fully Monitored R-Bus

Minerva T2000R and T2000R CV Marine Repeaters

The T2000R full function repeater is an EN54 Marine approved repeater with optional addressable EN54:Pt.4 power supply. The repeater consists of a steel backbox and cast aluminium front door which incorporates the ODM800 operator display module with a 16 x 40-character backlit LCD display, simple alphanumeric keypad and 5 softkeys. The OCM800 operator control module provides all mandatory operator control keys and LED functions including Day/Night switching. One control key and 2 indication LEDs are provided for vessel-specific functions. Control keys and LEDs are labelled in English according to the default Marine functionality. The slide in decals can be reversed and alternative text added. The back box has a removable chassis plate with the PSM800M power supply and APM800 addressable PSU monitor and space for 2 x 7 Ah batteries to provide 72h backup.

The T2000R CV indicating repeater is an EN54 Marine approved repeater (24Vdc Supply). The repeater consists of a mild steel backbox and cast aluminium front door which incorporates the ODM800 operator display module with a 16 x 40-character backlit LCD display, simple alphanumeric keypad and 5 softkeys. Operator controls comprise a panel buzzer silence button, status LED's are provided for fire, fault and power on indication.

Both repeaters are connected to the Panel via the remote bus (RS485, 1200 m distance). A maximum of 7 repeaters (including one MX REMOTE repeater) can be linked to each control panel and can provide repeater functions for all panels on the system.

The repeater can support up to 80 inputs and outputs in the form of LED annunciators, IOB800 input/output modules, XIOM universal I/O modules or the 80 LED mimic module.

Product Codes

557.200.601	T2000R Marine Repeater with Power Supply Unit 240Vac (Stainless steel enclosure)
557.200.604	T2000R Marine Repeater without Power Supply Unit 24Vdc (Stainless steel enclosure)
557.200.611	T2000R Standard Marine Repeater with Power Supply Unit 240Vac (Mild steel enclosure)
557.200.612	T2000R Standard Marine Repeater without Power Supply Unit 24Vdc (Mild steel enclosure)
557.200.621	T2000R CV Marine Indicating Repeater without Power supply unit 24Vdc (Mild Steel enclosure)
557.201.233	PSU 830 T2000/T2000R Conversion Kit
557.201.234	PSU 830 T2000 120VAC Kit

Chapter 2 - MZX Technology



MX Detection Panels - Technical Specifications & System Schematics

MX Detection Panels - Designer Housing Technical Specification


	Shallow Housing	Flush Shallow Housing	Deep Housing	Marine
Dimensions (mm)	320Hx440Wx120D	380Hx500Wx120D	320Hx440Wx215D	320Hx440Wx135D
Approx Weight	7Kg	7.2Kg	8Kg	14Kg
Temperature (Storage)	-20°C to +70°C	-20°C to +70°C	-20°C to +70°C	-20°C to +70°C
Temperature (Operating)	-8°C to +55°C	-8°C to +55°C	-8°C to +55°C	-8°C to +55°C
Humidity	up to 95% RH, Non-Condensing			
Colour (Housing)	Dawn Grey (BS 4800 10A - 03)			
Colour (Modules)	Pantone 431C			
EMC/RFI	EN 50130-4			
Shock	EN 54-2			
Vibration	EN 54-2			

MX2 Detection Panels Technical Specification

	Panel Shallow Housing	Panel Deep Housing	Expansion Housing Shallow	Expansion Housing Deep
Dimensions (MM)	580H x 458W x 129D	580H x 458W x 209D	357Hx 458W x 129D	357H x 458W x 209D
Approx Weight	12.7kg	15.2kg	6.2kg	7.5kg
Temperate (storage)	-20 °C to + 70°C			
Temperate (operating)	-5°C to +55 °C			
Humidity	Up to 90 % RH Non Condensing			
Colour (Housing)	Dawn Grey (BS4800 10A-03)			
Colour (Modules)	Pantone 431C			
EMC/RFI	EN50130-4 EN61000-6-3			
IP Rating	IP30			

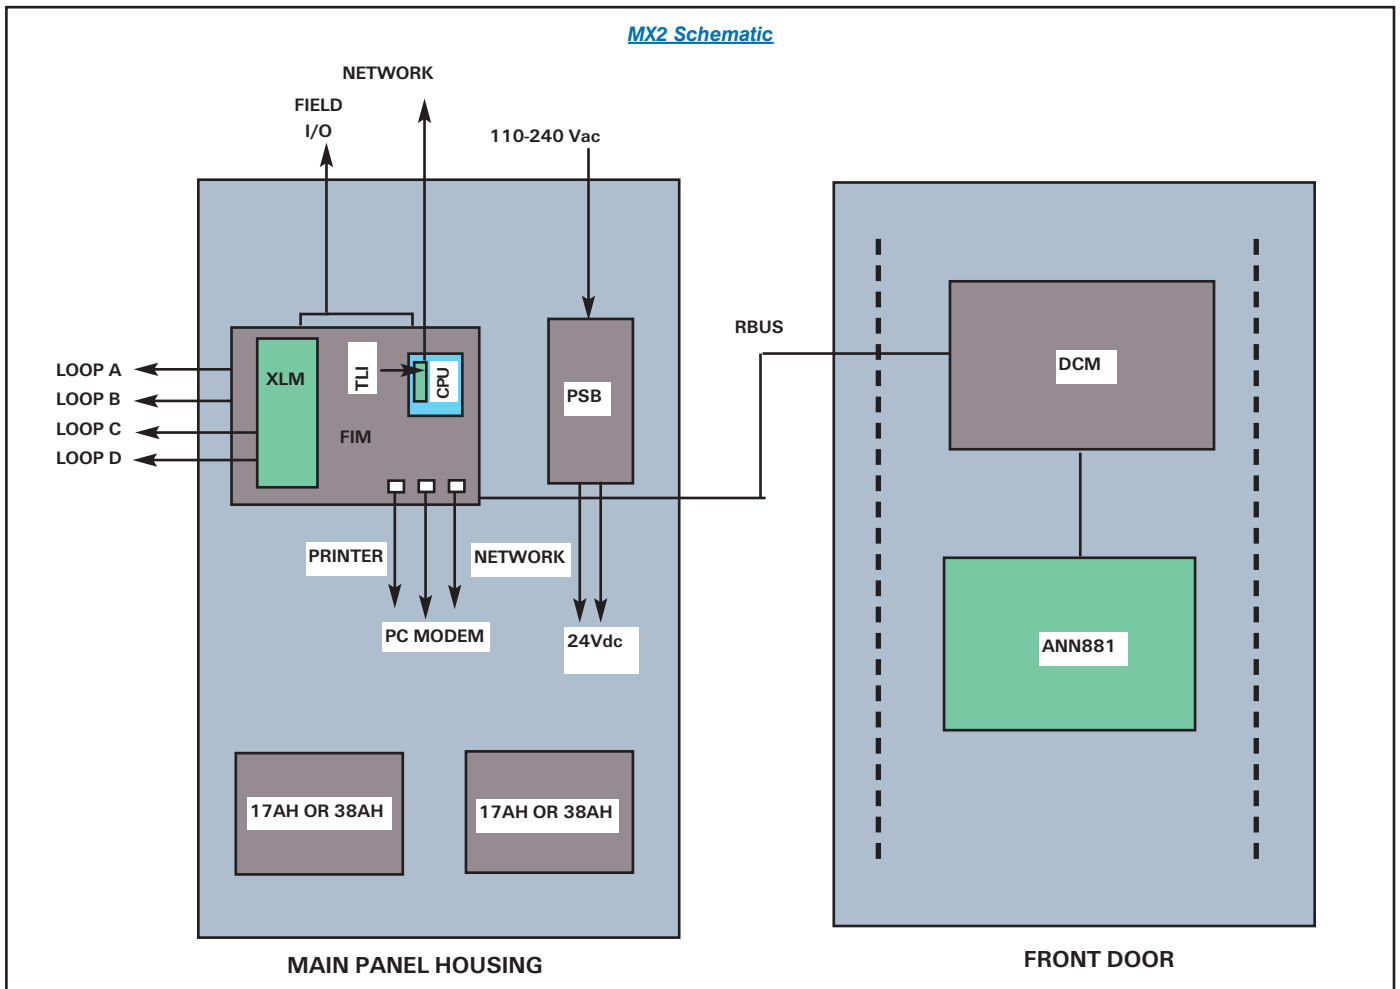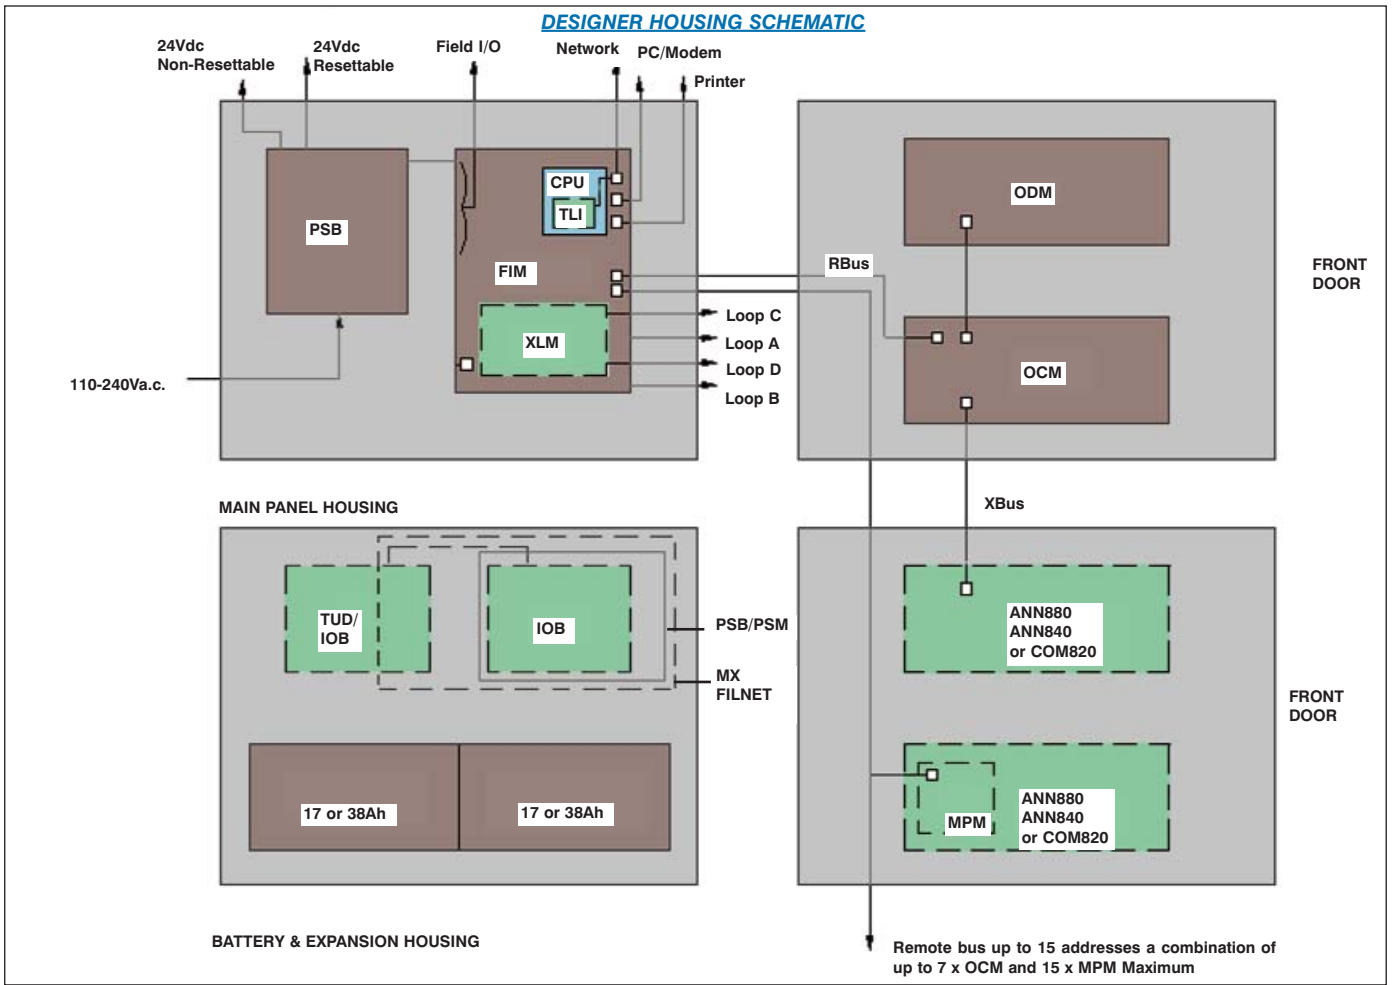

MX Panel Components



Features

- Full alarm and fault monitoring for up to 1000 addressable points including central loop processing of MX Fastlogic expert algorithms
- Concurrent operation of the main user interface and 2 remote user interfaces including one remote dial up or networked user interface
- Cause and core effect using up to 1000 input, output groups, delay timers and logic functions

CPU Central Processor

The CPU-800 provides the main processing power behind the MX detection panels. It is a multi-layer PCB and contains the CPU, the memory and interface electronics. The CPU-800 plugs into the Field Interface Module (FIM800).

The CPU-800 contains a Data Memory (SRAM), a Program Memory (Flash EPROM), a Configuration Memory (Flash EPROM) and a Boot ROM (EPROM). The use of flash EPROM allows program upgrades without the need for changing chips.

Technical Specification

32 bit Processor:	Motorola 68331
Data Memory SRAM:	1 MByte
Prog. Memory Flash EPROM:	2 MByte
Config. Memory Flash EPROM:	1 Mbyte
Boot EPROM:	64 kByte
Number of serial Interfaces:	4
Quiescent Current:	67mA
Alarm Current:	67mA

Product Code

557.202.002 CPU800 standard MX central processor



Features

- MX Digital Loop Protocol
- Extensive Loop Protection
- Interfaced to FIM 800 module

MX Loop Expansion Module

The XLM800 Loop Expansion Module fits “piggyback” style onto the FIM or an existing XLM 800 and is used to:

- Expand the capability of the MX4000 C.I.E. two loop system to eight loops
- Replace the FIM loops in case of a failure on either a two or four loop system.

The XLM800 Loop Expansion Module controls the communications between the detectors (and other ancillaries) connected on the 2-wire loop circuits and the controller. In addition, the addressable interface contains line isolation circuits which protect the loop driver circuit from short-circuit conditions.

Technical Specification

Dimensions: 17.5H x 104W x 196Dmm
Battery Requirements: Standby 104.3mA+loop current
Alarm 105.3mA + loop current
Loop Current 495mA maximum

Product Code

557.202.007 XLM-MX Two Loop MX Digital Expansion Card



Features

- Interfaces to CPU & XLM modules
- 3 Download/Network & Printer ports
- Up to 2 MX Loops

FIM800 Field Interface Module

The Field Interface Module FIM is the main interface for field wiring on MX detection panels and contains plug-in field wiring terminals, inter board connectors, EMC protectors and filters and general I/O electronics.

The FIM801 and FIM801CV provides 1 x MX DIGITAL loop and the FIM802 provides 2 x MX DIGITAL loops. Each MX DIGITAL loop can support several kilometres of loop wiring using a mixed topology using multiple loops and spurs.

The FIM provides up to 495mA of loop power to each loop to drive loop powered sounders and other loop power devices. An optional plug-in additional loop cards (XLM800-MX) provide up to 8 x MX Digital loops.

The FIM incorporates the following local I/O connections:

- 2 x reverse polarity monitored sounder outputs
- 2 x volt free outputs (Default alarm and fault)
- 1 monitored input (eg. Day/Night changeover)
- 1 emergency alarm input
- 1 unmonitored input (eg. Class Change or Tamper)
- Full monitoring of power supply
- Ground fault monitoring

Technical Specification

Dimensions:	25H x 105W x 196D mm
Weight:	156g
Power Consumption:	119mA (Quiescent - excluding loops and operator interface) 169mA (Alarm)
Relay Outputs:	30Vdc @ 2A
Monitored inputs:	10k Ohm EOL, 3KHz in parallel
RBUS:	RS-485 , default 19.6kB, up to 1200m
Serial Ports:	RS232C, 19.6kB, up to 10m
Local I/O Expansion:	Up to 2 modules, up to 24 I/O, max. 300mm

The FIM incorporates a local I/O bus which allows the local I/O connections to be increased by 24. A variety of I/O expansion boards are available including:

- IOB800 (8 in/8 out) expansion board
- TUD800 German Transmission Unit

The FIM includes two connections to the RBUS one for the local user interface and one for connecting up to 15 remote addresses in the form of up to 2 x operator control modules (OCM800) or up to 15 multi-purpose modules (MPM800).

The FIM provides 3 configurable external serial ports :

- Port 1 Local printer
- Port 2 Configuration PC or remote diagnostics and upload/download modem
- Port 3 FSI open protocol or Network card/gateway (TLI-800 or MX-FIL) (not provided on FIM 800CV)

Product Codes

557.202.000	FIM801 field interface module with one MX loop driver
557.202.001	FIM802 field interface module with two MX loop drivers
557.202.008	FIM801CV for Marine T2000 CV
557.180.053	MX RBUS Driver chip (spare)



Features

- Universal Input Voltage
- Temperature Compensated
- Full Fault Monitoring

PSM800 and PSB800M Power Supplies

The MX power PSU800 and PBS800 supply module used for the MX/ZX Range of fire controllers based on the designer housing (not MX2) is a state-of-the-art integrated switch mode system power supply and battery charger, which can provide up to 5A external and auxiliary loop power during alarm conditions. It has a universal input allowing operation from 100 to 255 Va.c., 50 or 60 Hz. The power supply is approved worldwide to EN54, UL864 and Marine standards.

The charging voltage is temperature compensated. The PSM recharges the batteries within 24h for the following timings:

- 90hr stand by time and 15 min. alarm condition
- 72hr stand by time and 30min. alarm condition

The power supply provides full condition and fault monitoring to the system via the FIM (used by the PSB800M) or addressable power supply monitor APM800 (used by the PSM800). The PSB800M incorporates the LBM800 booster module to provide the correct voltage levels to maximise the performance of the MX DIGITAL protocol.

Faults signals (Loss of AC, Battery charger fault, Battery fault) and control inputs (Battery test, Output reset) are provided. Battery voltage and charger current readings are also provided to the FIM or APM for automatic battery testing.

Screw terminals provide 2 x 24V outputs (24 V stabilised, 24V stabilised with reset control) and one 5V output. The power supply is fitted in a steel cage with mounting points to allow any of the following boards to be mounted:

- APM800 addressable power supply monitor
- FB800 fuse board with 15 x 24Vdc fused spurs
- IOB800 input/output expansion board

A PSB800MK Power Expansion Kit is required to power the XLM800 pcb on 4 loop systems which require the extended loop power capability. It consists of a PSM800 power supply module, an APM800 addressable monitor module, a battery connecting cable and an XLM800 to APM800 connecting cable and may be fitted onto the chassis plate in the battery housing.

Technical Specification

Dimensions:	50H x 114W x 190D mm
Weight:	0.9Kg
Input Voltage:	120-240 Vrms, 50/60Hz (Auto ranging)
Input Current:	0.8-1.6ARMS Rated Load
Max. charge current :	Up to 3.8A (dependant on standby current)
Max. battery size (24hr charge):	38Ah
Max. total supply current:	5A@24Vdc
Maximum external current:	4A@24Vdc
Output Voltages:	24Vdc (22.8 -26.4V)
Non-resettable:	24Vdc @ 4A
Resettable:	24Vdc @ 4A 5Vdc @ 3A
Power Consumption:	PSB - 90mA (quiescent & alarm) PSM - 65mA (quiescent & alarm)

Product Codes

557.200.014 MXAPSU17 Boxed Addressable PSU (17Ah)

557.200.015 MXAPSU38 Boxed Addressable PSU (38Ah)

Options

557.202.003 PSM800 Power Supply Only

557.202.403 PSM800M Marine approved power supply

557.202.405 PSB800M Marine Panel Power Supply (spare)

557.202.027 APM800 Addressable Power Supply Monitor

557.202.050 PSM800 Temp. Sensor Accessory kit

557.202.043 PSB800MK Marine Power Expansion kit

557.202.004 LBM800 Spare Loop Voltage Booster PCB



PSU830 Power Supply

The MX PSU830 power supply module is a state-of-the-art integrated switch mode system power supply and battery charger, which can provide up to 5A external and auxiliary loop power during alarm conditions. It has a universal input allowing operation from 100 to 264Vac 50 or 60 Hz.

The charging voltage is temperature compensated. The power supply recharges the batteries within 24hr for the following timings:

- 90hr stand by time and 15 minute alarm condition.
- 72hr stand by time and 30 minute alarm condition.

The power supply provides full condition and fault monitoring to the system via the FIM or addressable power supply monitor module APM800. The PSU830 incorporates a booster module to provide the correct voltage levels to maximise the performance of the MX DIGITAL protocol.

Fault signals (Loss of AC, Battery charger fault, Battery fault and earth fault) are provided.

Technical Specification

Dimensions (HWD):	62 x 132 x 242mm
Electrical Characteristics:	
Input Voltage:	120-240Vac 50/60Hz (auto ranging)
Input Current Rated Load:	0.8-2.2A ^{RMS}
Output Voltages	27.3Vdc @ +25°C
Non-reset:	27.3Vdc @ 2A 5Vdc @ 2.2A 40Vdc @ 2.2A
Reset:	27.3Vdc @ 2A
Rated Output	
Maximum Alarm current	5A for 30 minutes
Maximum continuous load current (excluding charging):	2.5A
Battery Requirements	
	17Ah or 38Ah single PSU 65Ah dual PSU
Standby Current Consumption:	90mA @ 24Vdc
Battery Fault High Resistance:	
Single PSU:	0.6 Ohms
Dual PSU:	0.3 Ohms

Features

- Universal Input Voltage
- Temperature Compensated
- Full Fault Monitoring
- Can drive 4 fully loaded MX digital loops
- When used with second PSU830 and MX2 8 loop expansion kit can power 8 fully loaded MX digital loops
- Same footprint and fixings as the PSB821
- Replaces PSB820 and PSM820
- Meets the requirements of EN54 part 4 amendment 2

Battery voltage readings are also provided to the FIM and a volt free fault o/p is also provided.

Screw terminals provide 2 x 27V outputs (one with reset control) and one 5V output. The power supply is fitted in a steel cage with mounting points to allow any of the following boards to be mounted:

- APM800 addressable power supply monitor module.
- FB800 fuse board with 15 x 24Vdc fused spurs.
- IOB800 input/output expansion board.
- PTM800 power terminal module.

The MX2 PSU830 Dual PSU Kit is required to power the XLM800 pcb on 6 to 8 loop systems which require the extended loop power capability. It consists of the necessary cables & connectors to enable an additional PSU830 to be fitted to an MX2 controller.

Product Codes

557.202.210	PSU830 Power Supply Module
557.201.232	PTM800 Power Terminal Module
557.201.231	MX2 PSU830 Dual PSU Kit
557.202.044	PSU 830K Power Expansion Kit
557.202.030	PSU 830 Panel Fixing Conversion Kit
557.202.031	PSU 830 Small Chassis Plate Conversion Kit



Features

- Changeable Legends
- Fully programmable
- Optional I/O via R-Bus

OCM800 Operator Control Module

The OCM800 is utilised by all MX detection panels and full function repeaters to provide mandatory operator control and LED indication functions to comply with EN54:pt.2. The OCM800 is fully programmable but operates in default configurations according to the software template used.

Most software templates allow several of the LED's and control buttons to be programmed for site-specific functions. The LED's and control buttons both have slide in legends to suit the default configurations and language. Standard panels include the appropriate legends for their relevant markets.

The OCM800 incorporates the functionality of an MPM800, which allows it to drive an operator display module to provide a complete panel user interface.

In addition the OCM800 can drive up to 80 inputs/outputs using one of the following modules.

The following I/O and LED annunciator modules can be slaved from an MPM800:

- Up to 5 x IOB800 (8 in/8 out LPCB/VdS approved expansion board)
- Up to 5 x XIOM (16 way universal I/O board)
- One Mimic Panel (80 way LED mimic driver PCB)
- One 80 way ANN880 LED mimic
- One 40 way ANN840 LED mimic using red & yellow LED's
- Two 20 way COM820 LED status/command modules

Up to 2 x OCM800 units can be connected to an MX panel via the internal or external RBus communication port.

Technical Specification

Dimensions:	50H x 232W x 133D mm
Weight:	0.272Kg
Power Consumption:	35mA (Quiescent) 36mA (Lamp test) 81mA (Alarm)
Control Buttons:	7
Indication LED's:	18
Communications:	RS-485: RBus –Default 9.2Kb
Expansion Bus:	MX X-Bus
Legends for LPCB modules:	UK/English, Marine

Product Code

557.202.013 OCM800 with Minerva MX Inserts



Features

- 0-9 alpha-numeric phone style keypad
- Up and down scroll keys
- Five function keys

ODM800 Operator Display Module

The ODM800 operator display module provides a powerful and flexible 40 x 16 character backlit LCD display used by all MX detection panels and full function repeaters. The ODM800 is used with the OCM800 to provide a fully compliant and approved user interface EN54 fire detection panels.

The ODM800 is powered and controlled by the OCM800 operator control module and provides various functions according to the panel software.

Standard EN54 panels use the LCD display as five windows on the system.

Window 1-Details of first detector in alarm

Window 2-Details of the most recent detector in alarm

Window 3-System Status including Alarm/Fault and Isolate counters

Window 4-Full alarm/event details and lists including 95 character procedure plus full password controlled system manager, service and engineering menu structure

Window 5-Function key legends (eg. Back, Enter, >>, <<)


Technical Specification

Dimensions: 25H x 232W x 133D mm
 Weight: 0.361Kg
 Power Consumption: 50mA (Quiescent)
 900mA (Alarm Backlit)
 50mA (Alarm during mains failure)

Product Code

557.202.019 ODM800 operator display module

OCM800 to IOB800 Connection Details

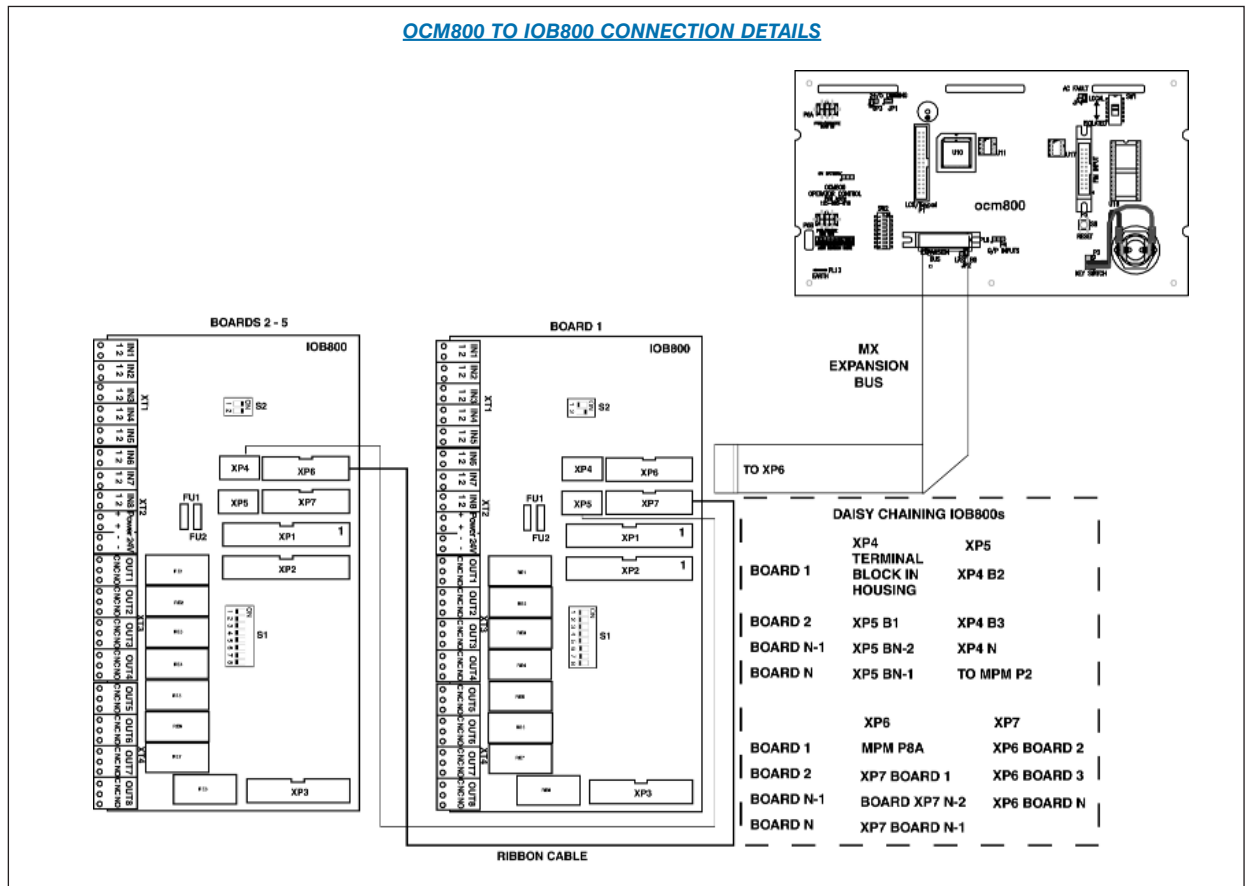

ANN840 LED Annunciator



The ANN840 is a standard LED annunciator user interface module which can be driven from an OCM800 or an MPM800. The MPM800 can be mounted remotely or "piggy-backed" on the ANN840. The ANN840 has removable legends for 40 zone status indicators. Each zone can indicate RED (eg. Alarm) and YELLOW (eg. Fault & Isolate). The functionality is programmed in the MX detection panel. The ANN840 operates as 80 outputs (RED & YELLOW).

Technical Specification

Dimensions:
25H x 232W x 133D mm
Weight: 177g
Power Consumption:
1mA + MPM800 (Quiescent)
85mA + MPM800 (25% zones in alarm (Alarm))
340mA + MPM800 (Lamp test)

Product Code

557.202.021
ANN840 LED annunciator

ANN880 LED Annunciator



The ANN880 is a standard LED annunciator user interface module, which can be driven from an OCM800 or an MPM800. The MPM800 can be mounted remotely or "piggy-backed" on the ANN880. The ANN880 has 80 red LEDs numbered 1 to 80. The functionality is programmed in the MX detection panel but is defaulted to zone alarm LED's.

Technical Specification

Dimensions:
25H x 232W x 133D mm
Weight: 177g
Power Consumption:
1mA + MPM800 (Quiescent)
85mA + MPM800 (25% zones in alarm (Alarm))
340mA + MPM800 (Lamp test)

Product Code

557.202.022
ANN880 LED annunciator

COM820 Status Command Module - 20 Way



The COM820 is a standard user interface module, which can be driven from an OCM800 or an MPM800. The MPM800 can be mounted remotely or "piggy-backed" on the COM820. The COM820 has removable legends for 20 status command functions. Each function includes a command button and a red status LED. The functionality is programmed in the MX detection panel. Typical applications include:

- Manual/OFF/Auto/Isolate functions for evacuation or plant control
- Selective isolate and evacuate functions for fireman's control
- Selective plant shutdown and override functions
- Selective system delay and timer functions

2 can be driven from 1 x MPM800.

Technical Specification

Dimensions:
25H x 232W x 133D mm
Weight: 204g
Power Consumption:
0.267mA (Quiescent - No LED's)
5mA (Alarm - 25% LED's)
21mA (Lamp test)

Product Code

557.202.020
COM820 Status/Command Module

Remote Mimics



The 80-Way Mimic allows custom-made display and presentation panels to be incorporated in the MINERVA MX addressable system. It is supplied as a single PCB, which may be mounted in an expansion box or on the rear of a free-standing panel, as required. It may be used to drive up to 80 zonal LED indicators, arranged in any configuration, together with two FIRE LEDs, one FAULT LED and one ISOLATE LED. These indicators can operate in the same manner as the corresponding indicators on the panel.

A remote Mimic can be connected to the MPM800's configured as remote Mimic drivers via the remote bus.

Up to 15 MPM800's may be connected on to the remote bus, each with a unique address [set on-board]. The Mimic includes audible and visible warning facilities.

Technical Specification

Dimensions: 235H x 190Wmm
Operating Temp: -10°C to +55°C
Storage Temp: -20°C to +65°C
Relative Humidity: Up to 95% RH Non-Condensing

Power Consumption: 11mA (Quiescent) 200mA (25% Alarm) 800mA (Lamp Test)

Product Code

557.180.005
MINERVA 80 way mimic driver module



Features

- Drives up to 80 I/O points
- Direct Interface to Zonal Displays and other Modules
- Interfaces to FIM Board

MPM800 Multi Purpose Interface Module

The MPM800 is used to provide various expansion capabilities via the remote bus (RBUS). The MPM800 is provided as a standalone module but is also incorporated into the circuitry of the OCM800 operator control module to drive the LCD display, LEDs, keyswitch and keys on the OCM800 and the operator display module. The OCM800 and MPM800 have an XBUS which can be used to drive up to 80 I/O. The MPM800 also has a printer interface for connecting to a serial or parallel printer.

An additional printer driver kit is required to allow the MPM800 to drive a printer - a serial isolation module should be used to eliminate earth fault indications caused by some mains connected printers.

Up to 15 x MPM modules can be connected to each panel of which 8 can be in the form of OCM800 (including the main OCM800 user interface). One OCM800 can also be in the form of an emulated user interface on a remote PC connected via the network or dial up modem. The following I/O and LED annunciator modules can be slaved from an MPM800:

- Up to 5 x IOB800 (8 in/8 out expansion board)
- Up to 5 x XIOM800 (16 way universal I/O board)
- One Mimic Panel (80 way LED mimic driver PCB)
- One 80 way ANN880 LED mimic**
- One 40 way ANN840 LED mimic using red & yellow LEDs**
- Two 20 way COM820 LED status/command modules**

The MPM800 is mounted by plugging directly onto the back of those items marked **

Technical Specification

Dimensions:	25.4H x 92W x 167.64D mm
Weight:	98g
Power Supply:	24Vdc (from PSB or PSM800)
Communications:	RS-485, up to 19.6kB
Printer Connection:	Serial or Parallel

Product Codes

557.202.012	MPM800 multi-purpose interface modules
557.202.117	Serial printer cable for MPM800 or FIM800
557.180.052	Serial Printer Driver Kit
557.180.053	Isolated RS485 IC (for U16)

IOB Input/Output Expansion Board



The XIOM is a 16 universal input/output expansion board.

The I/O on the XIOM can be set in banks of 8 to operate as follows:

- LED driver outputs (10mA source)
- Relay Driver Outputs (100mA sink)
- Voltage Monitor Input (8 - 30Vdc Normal)
- Volt Free Contact inputs

Features

- 16 I/P's or 16 O/P's or 8 I/P + 8 O/P
- 5 per MPM800 (80 I/O points)
- Fully configurable in MX consys

Technical Specification

Dimensions:
144H x 85W x 15D mm

Product Code

557.180.016
XIOM MINERVA Input/Output Expansion Module (16 Way)

FB800 Fuse Board



The FB800 fuse board provides terminations for 15 fused 24Vdc output spurs from a single 24V d.c. input. The FB800 is designed to be normally mounted on the PSB800M or PSM800 power supply. The fuses are rated at 500mA.

Technical Specification

Dimensions:
93H x 165W x 80D mm
Weight: 149g
Input: 24Vdc
Output:
15 x 24V d.c / 500mA
Terminations: 2.5mm

Product Code

557.202.100
FB800 fuse board (15 way)

IOB Input/Output Expansion Board



The IOB800 is an LPCB approved board that provides 8 opto-isolated digital inputs and 8 x 24V d.c. relay outputs for providing I/O expansion capabilities to MX detection panels for interfacing to other subsystems and signalling devices. The IOB800 also incorporates a connector, which provides decoded signals for the 8 inputs and 8 outputs for specialist interfacing.

The IOB800 can be used to provide expansion I/O to the following MX panel components:

- FIM801/802 field interface modules (maximum 24 I/O 8IN/16OUT)
- OCM800 operator control modules (maximum 80 I/O)
- MPM800 multi-purpose interface (maximum 80 I/O)

The IOB800 can be mounted in the top of a battery box or repeater. The IOB800 has two expansion bus connectors which allow them to be daisy chained together.

Technical Specification

Dimensions:
15H X 164W X 80D mm
Weight: 153g
Terminations: 1.5mm

Product Code

557.202.006
IOB800 Expansion Board and cables



Features

- High level interface to building automation systems
- Meet interfacing requirements for large integrated projects

MZX BACnet Interface

BACnet can be provided from a stand-alone MZX Technology panel or from an MZX or FILnet network via the MZX BACnet converter.

The MZX BACnet converter is a mini RISC-based embedded computer which converts fire data to the BACnet communications protocol. The converter needs special firmware that is simply uploaded from a PC.

Technical Specification

Mechanical

Weight:	130 g
Dimensions:	67 x 22 x 100.4 mm
Mounting:	DIN-Rail, wall
Operating Temperature:	-10 to 60°C
Operating Humidity:	5 to 95% RH
Storage Temperature:	-20 to 80°C

Electrical

Input Voltage:	12 to 48 VDC
----------------	--------------

Product Code

557.202.135 BACnet Converter for MZX

Desktop Printer



The printer is designed as a low cost business printer ideally suited for mounting adjacent to the fire control panel. The LQ-300+ combines high performance with paper handling flexibility and quiet operation.

Features

- 300 cps draft/ 90cps LQ.
- Quiet operation
- Lightweight and compact design
- 9 LQ fonts
- 2 paper feed paths
- Convertible push/pull tractor
- Paper guide
- Auto loading
- Paper park

- Cable feed recess
- Epson LQ standard terminal emulation available
- Parallel and serial interface

Technical Specification

Dimensions: 159H x 366W x 275D mm
 Weight: 4.4kg
 Operating Voltage: 180V to 264Va.c.

Product Codes

557.180.239
 MINERVA printer LQ-300+
 557.180.220
 LQ 300+ Printer Ribbon (spare)
 557.202.117
 MX FIM/MPM to serial printer lead

In-Built Printer



The PRN800 Printer Kit is designed for use with the designer range of MX Controllers (MX1000, MX4000 and T2000). It is fitted to the front cover of the MX battery housing and is powered from the PSB 800 power supply via an FB800 fuseboard in the MX Controller housing.

Features

- A thermal printer mechanism which ensures high reliability.
- Quiet Operation
- Lightweight and Compact Design
- High Speed Printing: 40mm per second.

- High quality printing: 384 dots.
- 40 Columns
- Friction paper feed

Technical Specification

Dimensions: 230H x 137W x 85D mm
 Weight: 0.38Kg
 Operating Temp: +5°C to +45°C
 Storage Temp: -20°C to +70°C
 Relative Humidity: Up to 80% non-condensing
 EMC: 61000-6-3 for emissions
 BS EN 50082-1 for immunity

Product Codes

557.202.024
 PRN 800 Printer c/w front cover module
 557.301.014
 Spare Paper Roll (pk of 5)

Remote LCD Display



The Remote LCD Repeater Module is designed to provide an independent scrolling log of system status at numerous points within a building or site. The module interfaces directly to a serial printer port of the MX addressable fire panel. If a local printer is already connected to the Panel's MPM800 serial port, a second MPM800 must be used.

Features

- Uses a backlit 4x20 character alphanumeric display.
- Provides an internal log of up to 330 events.
- Provides internal audible warning of an event.
- Allows the event log to be scrolled.
- Local internal buzzer silence.
- Connects to host panels RS232 port (maximum cable length between panels and first repeater of 15m).
- Provides an external sounder to mimic the internal buzzer.
- Can be connected to an unlimited number of other LCD Repeaters by using the RS232/RS422 converter (Up to 1200m between repeaters).

The LCD repeater must not be used in the primary fire path. It must not be used as the sole warning that a fire exists.

Technical Specification

Dimensions: 150H x 200W x 75D mm
 Material: Bayblend polycarbonate/ABS alloy
 Operating Temp: -10 C to +55 C
 Relative Humidity: Up to 95% RH Non-Condensing
 Power Supply: 200mA @24Vdc
 Ext. Sounder Relay: 500mA@24Vdc
 EMC: Product Family Standard EN50130-4 in respect of Conducted Disturbances, Radiated Immunity, Electrostatic Discharge, Fast Transients and Slow High Energy. EN61000-6-3 -1 for Emissions.

Product Codes

557.200.030
 Remote LCD Repeater MKII (compatible with Version 4.1 and above for UK/UL/Marine/Western European Countries)
 557.202.128
 MX FIM com1 to RS422 Lead
 557.180.151
 RS232/422 converter for LCD Repeaters.

DDA Compliant Pager



Fire Tek Pro Paging System

The FireTek Pro paging system is designed for use with professional Fire Systems installed in commercial, industrial and educational premises. The system is primarily designed to alert the "hearing impaired" in the event of a fire or other emergency where an audible sounder is the normal means of indication.

The FireTek Pro has been designed to comply with the recommendations detailed in BS5839-1: 2002 for alerting the "hearing impaired" to the activation of a fire alarm system.

The system can also be used in conjunction with a security panel to alert guards who might be located remotely from the main premises.

The interface to the fire panel comprises of three Prioritised Fire Inputs and two Fault Inputs. For ease of installation, a monitored cable assembly is provided with each system which includes a "common fault" relay output back to the host fire panel. This output will activate if the FireTek Pro suffers a mains failure, transmitter fault, antenna mismatch, interface link failure, or low battery state.

Upon activation of any one of the Fire Inputs, the FireTek Pro will enter the fire alert condition, prioritising and transmitting the Fire message to all enrolled pagers. The transmissions will be repeated until the fire condition is reset. The FireTek Pro Pagers ensure that users are alerted by distinct vibration patterns and clear text messages.

UHF Radio Operation

Any alerting system is only as good as its weakest link. The FireTek Pro utilises UHF radio frequencies, the main benefits being superior in-building radio signal propagation and the option of a manual frequency co-ordinate license issued by OFCOM. Licensing the FireTek Pro provides a higher degree of protection from interference. This fact is acknowledged in Section 18.1 of BS 5839-1:2002.

Features

- UHF radio link for maximum licensable protection
- Unique coding avoids neighbouring system clashes
- Self monitoring of system health
- Rugged steel enclosure to IP65
- Backlit 2 line text display continuously reports system status
- Additional audible & visible status indicators
- Prioritised Fire Alarm Inputs
- Automated test calls alert pagers to loss of radio signal
- Fault Notification to the host fire panel via a monitored link
- Key operated "System Test" facility for routine confidence checking
- Over 90 hour's backup operation with internal battery
- Achieves Disability Discrimination Act (DDA) compliance

High Integrity Pagers

To complete the system the alphanumeric pagers have added features specifically incorporated for the "hard of hearing" when used with the FireTek Pro. These features include distinct vibrate alerts for emergency messages, a vibrating out of range indicator which displays "No Service" on the pager when the radio link is lost, and a vibrating low battery indicator.

Antenna Options

Mini Dipole Antenna - remote internally mounted antenna for large sites or areas of difficult signal propagation.

Folded Dipole Antenna - remote externally mounted antenna for maximum signal coverage e.g. campuses and multi-building sites.

Chapter 2 - MZX Technology

Technical Specification

Supply Voltage:	230V AC 50-60 Hz 12v 7Ah standby battery
Operational Current:	250mA
Inputs:	3 Prioritised Volt Free (Fire) Input 1 - Fire Alarm - Evacuate Building Input 2 - There is an Incident - Leave Building Input 3 - Prepare to Evacuate - Await Instructions
Outputs:	2 Volt Free (Fault)
Fault Notification:	1 off volt free relay output Mains Failure Transmitter Fault Antenna Mismatch Panel Link Failure Low/Missing Battery
Visual Display:	2 Line Backlit LCD
Enclosure:	Steel Enclosure rated to IP65
Dimensions:	380 x 320 x 110 mm (H x W x D) (No antenna fitted)

Product Codes

557.200.071	Paging Transmitter
557.200.074	40 Character Alpha Numeric Pager
557.200.076	1/2 wave dipole antenna
557.200.077	Wall mounting folded dipole antenna
557.200.078	Pole mounting folded dipole antenna
557.200.079	5 metre antenna feeder cable
557.200.080	10 metre antenna feeder cable



Features

The pagers:-

- Display messages sent out by the MX as displayed on the MX LCD
- Internal log of up to 40 events
- Audible and/or vibrate warning of event
- Allows the event log to be displayed

The transmitter:-

- Connects using a 9 way D type MX interface lead to MX printer port

Pager Interface

The MX pager system is designed to provide a facility to signal all text messages or alarm/fault messages from a local transmitter to the pagers.

The transmitter connects to the serial printer port of an MPM800, if a local printer is connected to the controllers MPM800 serial port, a second MPM800 must be used. The pager system requires a +12V d.c. connection (from a remote psu) and a serial port connection. If the transmitter needs to be located further than 2 m from the MX Panel, then a non-standard serial printer cable may be used, up to a maximum distance of 14m.

The Type A alarm pager can display alarm/fault messages. The Type B maintenance pager displays all messages sent by the fire controller.

CAUTION: Before any installation is carried out, an on site radio paging license must be obtained by the customer. Care should be taken when designing pager systems. Normal practice indicates that a site survey should be done. Contact Product Management for additional advice on site surveys.

Technical Specification

Dimensions:	328H x 190W x 75D mm
System operating voltage:	12 to 13.8Vdc
Effective radiated power:	500mW
Frequency range:	50-470 MHz
Channel spacing:	25KHz
TX baud rate:	512 or 1200
Type approval	ETS 300 224, MPT1383 Cert No. 13249, EC type approved to ETS 300 682 Approval No. 13331

[Manual - Vol17A-2-Pager](#)

Product Codes

557.200.029	Pager Transmitter
577.002.002	Type A alarm pager
577.002.003	Type A maintenance pager
577.002.007	Pager aerial 60 db gain up to 1km (c/w mounting bracket)
577.002.008	Optional feeder cable (10m long)
1381N	Elmdene 12V 1A PSU in Housing

MX Virtual Multi-Sensor Detectors



Features

- Multiple Fire Detection modes
- Tyco MX FASTLOGIC Expert Algorithms
- MX HPO detection algorithms
- Tyco CO fire detection technology
- Up to 250 detectors per loop
- Optional bi-directional line isolation with every detector
- Remote detector verification & temperature read-out
- Highly featured MX SERVICE tool
- Programmable Alarm LED with 360° viewing angle
- Optional detector locking pin
- Variety of sounder and relay detector bases
- Address flag stays with the base
- Internationally approved

800 Series Detectors

The 800 Series are addressable multi-sensor fire, smoke and heat detectors, which can be implemented as several MX VIRTUAL detectors by the MX detection panel. The 801 and 811 Series are designed and approved to EN54, the 801 Series carry land based approvals and the 811 Series also carry Marine approvals.

The 800 Series of MX VIRTUAL detectors provide the latest fire detection technology in an attractive cost effective package.

Installation & Service Features

The 800 Series MX VIRTUAL detectors include a host of installation and service features which are provided to reduce installation and service costs and reduce repair times.

- Standard bases with multiple mounting options speed and simplify installation
- Unique 'park' position for commissioning and service procedures.
- Detector Addressing programmed from the MX SERVICE Tool or MX Panel
- Address flag – fixed to the base to prevent mix ups during service
- Compatible with Tyco 600 and 900 Series bases – for easy upgrade
- Panel Auto-Config and Self learn functions – supported by the detectors
- Detector Service functions allow 800 Series detectors to be automatically addressed
- Full range of remote installation and service tools
- Dirty Detector Read-out can be viewed on the MX SERVICE tool or panel.


Construction & Technical Specification

The 800 Series detectors are supplied in an extremely robust and reliable fully sealed construction, which has undergone stringent environmental and Marine type testing. Electrical contacts are moulded into the plastic to eliminate any movement.

The detectors are constructed from hardwearing Fire Resistant FR110 plastic.

The multi-sensor detectors are environmentally friendly. They use no radioactive parts and can be returned to the factory for recycling at the end of their life.

All 800 Series detectors are supplied with integral dust covers as part of the packaging. Dust covers are retained throughout installation and removed at commissioning time.

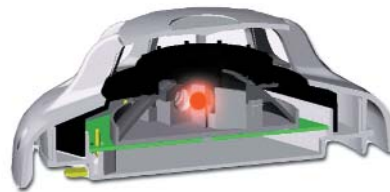



Features

- Combined optical, heat and carbon monoxide detector
- Operate simultaneously as a fire and CO toxic gas detector
- Early detection of all fire types from smouldering to fast flaming
- Minerva® Expert algorithms use elements for positive false alarm detection
- Optical, CO and Heat can operate independently for sequential alarm systems and CO toxic gas alert
- All 3 elements are independently monitored for faults
- Universal mode for maximum fire protection
- Resilient mode for false free operation in challenging environments
- Use with standard or loop powered sounder base for reduced installation costs

3oTec Multi-Sensor Smoke, Heat and Carbon Monoxide Detector

The 3oTec detector is a combined optical, carbon monoxide and heat detector for use with MX Technology® controllers. The 3oTec can be used in combination with other MX Technology® detectors with a maximum total of 250 detectors connected to a single 2 wire MXDigital loop.

Single-Mode and Multi-Mode Operation

Each individual 3oTec detector will be operating in either single-mode or multi-mode. This will be set at the time of commissioning for each 3oTec detector dependant on the application.

Single-Mode

As a single mode detector the 3oTec uses a single address. All the user control features currently applicable to other detectors can also be used with 3oTec. This includes the ability to switch between modes, either automatically or manually.

Multi-Mode

As a multi-mode device the 3oTec takes three addresses form the available 1000 per MX/ZX panel. The choice of modes used in multi-point will depend on the application. As far as the user is concerned, each address is an individual detector with its own attributes and settings. The user can also switch between modes for each of the addresses used.

Heat Sensing Element

High quality thermistor with very low thermal mass for added responsiveness.

Optical Chamber

The optical chamber has many advanced features that improve performance and reliability. High intensity, short pulse width infrared light source for heightened responsiveness.

Optical feedback will verify the total optical path on every poll of the detector.

Precision optics eliminate nuisance from small insects such as thrips, without the need for a filter.

Carbon Monoxide Cell

High efficiency electro-chemical CO detection cell

Cell integrity is continuously monitored

Increased cell capacity for durability

Cell is electronically calibrated for IS07240.6 fire applications or EN50291 toxic gas applications



Technical Specification

Mechanical

Detector Material	FR110 "Bayblend" Fire resistant
Weight	0.2Kg detector and base (approx)
Colour	White

Environmental

Operating Temp.	Range -10°C to +55°C
Storage Temp.	-20°C to +55°C
Relative Humidity	90% non condensing

Product Codes

516.800.800	801PC Unbranded
516.800.800.A	801PC ADT branded
516.800.800.Y	801PC Tyco branded
516.800.801	811PC Marine Approved

	801PC
Mode 1	Universal multi-criteria sensor
Mode 2	false alarm immunity multi-criteria
Mode 3	A1R
Mode 4	Enhanced Optical
Mode 5	Enhanced CO
Mode 6	CO Toxic Gas
Certification	LPCB \ VdS

800PH Multi-Sensor Smoke and Heat Detectors



The 800PH is a state-of-the-art smoke and heat detector which allows a full set of detection modes to be implemented in the MX detection panel to suit most smoke and heat detection applications.

The 800PH incorporates a unique "mousehole" design optical chamber with an unrivalled signal to noise ratio providing high resilience to dust and dirt which means reduced service costs. In addition a unique chamber cover actually draws slow moving smoke into the chamber to provide a more responsive detector. The unique design provides immunity to small insects and thrips without the need for a separate thrip filter.

The 800PH provides all the features of MX VIRTUAL detectors including self verification, temperature and smoke level indication and unrivalled service functions.

Technical Specification

Dimensions: 109dia x 43H mm
 Operating Temp.: -20 to +70°C
 Storage Temp.: -40 to +80°C
 Relative Humidity: 95% (non condensing)
 Standards: EN54 pt 5, EN54 pt 7

Product Codes

801PH
 516.800.500.A ADT
 516.800.500.T THORN
 516.800.500.Y TYCO

811PH
 516.800.507 THORN

	801PH	811PH
Optical	Yes*	Yes*
Enhanced Optical (HPO)	Yes*	Yes*
Normal Ambient ROR	A1R	A1R
Fixed Heat	A2S 60°C	A2S 60°C
Certification	LPCB	Marine

* Approved with MX Fastlogic algorithms

800H Heat Detectors



The 800H is a flexible cost-effective addressable heat detector with all the features of MX VIRTUAL detectors. The 800H returns the temperature to the MX detection panel which allows various detection modes to be implemented. The 800H uses a high quality thermistor with very low thermal mass. This allows the detectors to provide fast accurate temperature detection as well as heat detection.

Technical Specification

Dimensions: 109dia x 43H mm
 Operating temp: -25 to +70°C (-40 to +90°C for short periods)
 Storage temp: -40 to +80°C
 Standards: EN54: pt.5

Product Codes

801H
 516.800.502.A ADT
 516.800.502.T THORN
 516.800.502.Y TYCO

811H
 516.800.509 THORN

	801H	811H
High Ambient ROR	CR	CR
Normal Ambient ROR	A1R	A1R
Fixed Heat	A2S 60°C	A2S 60°C
Certification	LPCB/VdS	Marine

800CH Multi-Sensor Carbon Monoxide Fire Detectors



The 800CH is a state-of-the-art carbon monoxide and heat detector which allows a full set of detection modes to be implemented in the MX detection panel to suit most fire and heat detection applications. The 800CH is particularly well suited to sleeping risks, storage areas and applications where smoke detector positioning is difficult or where smoke detectors are prone to false alarm.

The integration of heat detection into the 800CH allows the detector to operate in a wide variety of applications where combined risks mean that CO detection alone would be insufficient.

The 800CH incorporates a reliable electro-chemical CO detection cell and high specification low thermal mass thermistor for accurate temperature detection.

The 800CH provides all the features of MX VIRTUAL detectors including self verification, temperature and CO level indication and unrivalled service functions.

Technical Specification

Dimensions: 109dia x 43Hmm
 Operating Temp: 0 to +55°C
 Storage Temp: -20 to +55°C
 Relative Humidity: 95% (non-condensing)
 Standards: EN54 pt 5, EN54 pt 7

Product Codes

801CH
 516.800.501.A ADT
 516.800.501.T THORN
 516.800.501.Y TYCO

811CH
 516.800.508 THORN

	801CH	811CH
Carbon Monoxide	Yes	Yes
Enhanced CO (CCO)	Yes	Yes
Normal Ambient ROR	A1R	A1R
Fixed Heat	A2S 60°C	A2S 60°C
CCO plus ROR (A1R)	Yes	Yes
Certification	LPCB	Marine

800F Flame Detectors



The 800F is a digital addressable, low cost infrared flame detector with some high end features such as 'Solar Blind' operation for false alarm free reliability and an automatic health check feature. Will detect a 0.1m² flaming fire at a range of 20m. Uses the standard MX detector bases and MX base accessories. An Intrinsically safe version is available as part of the System 800 I.S. range.

Technical Specification

Dimensions (mm): 108Dia x 21.2H
 Weight: 74g
 Operation Temp: -20°C to +70°C
 Storage Temperature: -40°C to +80°C
 Relative Humidity: 90% RH continuous (non-condensing)
 Range: 0.1m²n-heptane at 50m
 Field of View: 100°
 Standards EN54 pt10 Certification

Product Codes

516.800.006
 801F LPCB
 516.800.007
 811F Marine

800I Ionisation Smoke Detector



The 800I ionisation detectors are offered for old specifications which still call for ionisation smoke detectors. The 800CH and 800PH detectors offer improved performance, significantly lower false alarms and environmental compatibility for smoke detection applications. The 800I nevertheless offers state-of-the-art ionisation smoke detection with self verification, smoke level indication and threshold

compensation for detector condition monitoring. The 801I is LPCB approved.

Technical Specification

Dimensions: 109dia x 43Hmm
 Operating Temp: -20 to +70°C
 Storage Temp: -40 to +80°C
 Relative Humidity: <95% (non condensing)
 Standards: EN54 pt 7

Product Codes

801I
 516.800.515.A ADT
 516.800.515.T THORN
 516.800.515.Y TYCO

801PS High Sensitivity Smoke Detector



The 801 PS high sensitivity smoke detector is designed for applications which require a detector with a greater sensitivity than specified within EN54-7.

Having a response to smoke of 0.6%/m makes this device suitable for use in locations where early smoke detection is required, ie cabinet protection and areas where

aspirating systems would have previously been considered.

Technical Specification

Dimensions: 109 Dia x 43Hmm
 Operation temp: - 25°C to + 70°C
 Storage temp: - 40°C to +80°C
 Relative Humidity 95% non-condensing

Product Code

516.800.518
 801PS High sensitivity smoke detector

Line Shorting Adaptor



Low profile line shorting adaptor commissioning tool (shorts terminals together enabling cable resistance checks to be carried out) - ADT Branded

Product Code

517.050.002.A
 Line Shorting Adapter

GD210 Gas Detector



The GD210 flammable gas detector is designed for use in non-hazardous areas where flammable gas detection is required, typical locations include kitchens, gas fired boiler rooms, meter rooms, sub basements and cable chambers.

This detector connects via a 4-20mA interface to the DDM800 Universal Fire and Gas Module

Voltage 12-30 VDC
 Power 3.5 watts
 Output 4-20mA 3 wire Source
 Load resistance 250 ohms (max)
 Operating temp - 40 to +65°C
 IP rating - 55
 Cable entry 1 x M20

Product Codes

516.100.050
 GD210 Flammable Gas Detector
 4 - 20mA interface
 516.100.013
 Test Gas Kit - 20 L can of 2.5% methane (50%LEL) c/w adaptor and tube
 516.100.014
 Test Gas - 20 L can of 2.5% methane (50%LEL)

Beam and Linear Heat Detectors

Beam type smoke detection is ideal for large open span buildings where point type detection is unsuitable i.e. warehousing & sports halls. The range of Linear Heat Detection is of particular use in tunnels and cable ducts and other similar areas.



Features

- Motorised Auto-Aligning
- Up to 4 Detectors per System Controller
- Each Detector configurable from 8m to 100m
- Integral LASER
- Auto-Align Fast Automatic BeamAlignment
- Auto-Optimise Building Movement and Contamination Compensation
- Low Level System Controller
- 20mm Cable Gland Knockouts on System Controller
- 2-wire interface from System Controller to Detector
- Worldwide Approvals including EN54:12 and UL268
- Up to 4 Detectors per System Controller

FIRERAY 5000 Multi Head Auto Aligning Infrared Optical Beam Smoke Detector

The FIRERAY® 5000 motorised, auto aligning infrared optical beam smoke detector can now be installed with up to four detector heads per system, thus saving on installation time and costs. This innovative system has been designed from the ground up to include pioneering technology that fully addresses the needs of the installer and user, both now and in the future.

With its industry leading optics, the FIRERAY 5000 is ideally suited for the protection of large areas where the use of traditional detection technologies would prove to be too difficult and/or costly to install. The FIRERAY 5000 combines an infrared transmitter and receiver in the same discrete unit and operates by projecting a well-defined beam to a reflective prism, which returns the beam to the receiver for analysis. Smoke in the beam path causes a drop in power, which, if below a pre-determined level, results in an alarm signal.

Getting the system operational is simplified by a number of groundbreaking features that combine to make the FIRERAY 5000 the quickest and easiest detector of its type to install. Once the detector heads are connected, using the Easifit First Fix system, an integral LASER, which is aligned along the optical path of the beam, can be activated. This allows the reflective prism to be sighted quickly and with confidence. Once the LASER has been used to coarsely align the beam, the AutoOptimise beam alignment system takes over and automatically steers the beam into the optimum position.

Technical Specification

Controller:	202w x 230h x 81d mm 0.9 Kg
Detector:	134w x 135h x 134d mm - 0.5 Kg
Additional detector head	2mA @ 24VDC
Operating Current (low power mode):	10mA @ 24VDC
Operating Voltage:	14 to 28VDC
IP Rating:	IP54
Operating Temp:	-20 to +55°C
Humidity:	93% RH (non condensing) max

The system can be fully customised, according to local conditions; both alarm thresholds (sensitivity) and time to Alarm/Fault can be set from the ground level System Controller.

Each detector head is independently configurable from 8m through to 100m and has its own individual fire threshold. The System Controller retains one set of Fire and Fault relays that is common to all detectors that are installed.

The FR5000 MultiHead is supplied with one detector head and reflector for single beam operation from 8 to 50 meters. Up to 3 additional detector heads can be added to the controller to enable larger or more complex areas to be protected (Subject to local codes and standards).

The Fireray 5000 when used in its low power mode can be interfaced to the MZX Fire Controller using the BDM800 module.

Product Codes

516.015.020	FireRay 5000 System (50m)
516.015.021	FR 5000 Detector Head (50m)
516.015.007	FireRay Reflector 100 x 100mm
	4 reflectors are required for distances from 50 to 100m



Features

- Range 5 metres up to 100 metres
- Area coverage up to 1400m²
- Selectable sensitivity
- Self-check and automatic compensation
- Manual or automatic reset
- Optional Mx Technology loop powered interface module (BDM800)
- Suitable for both conventional and addressable fire systems
- Fire/fault interface to MX controller
- Low current consumption
- Flexible system design options
- Robust metal construction
- Designed to conform to BS5839 Part 5

Optical Beam Smoke Detectors

The FIRE-RAY 2000 is an active infra-red smoke detector. The system comprises of three base elements i.e. a transmitter, receiver and Control Unit.

Analysis of the modulated infra-red beam by the Control Unit determines whether smoke is present, and if so generates an alarm signal.

Technical Specification

Technical Specification				
	Dimensions(mm)			Weight (Kg)
	Height	Width	Depth	
Transmitter/Receiver	95	75	115	0.4
Control Unit	260	210	80	2.25
BDM800 (with M520 encl.)	87	148	14	0.1
Voltage Range-	Fireray 2000	+11.5 to +28Vdc		
	BDM800	40V Loop Power		
Fireray 2000 Quiescent Current	<13mA			
Fireray 2000 Alarm Current	<20mA			
Operating Temp. Range -	Fireray	-10°C to +55°C		
	BDM800	-10°C to +55°C		
Humidity (Fireray 2000 & LPBD521)	up to 95% RH			
Fireray 2000 Enclosure	(Non-condensing) IP54			

Product Codes


- 516.015.006.A FireRay2000 optical beam smoke detector VdS approved, ADT Branded
- 516.015.006.T FireRay2000 optical beam smoke detector VdS approved, Thorn Branded
- 920450 FireRay2000 -UL Optical beam smoke detector - UL approved
- 516.015.007 FireRay2000 Retro-Reflector 100 x100mm
- 516.015.008 FireRay2000 Alignment tool

FireRay Optical Beam Smoke Detector Mounting Accessories

There are a range of mounting accessories available for use with FireRay® Optical Beam Smoke Detectors. These accessories will help reduce installation times and provide a professional mounting solution when faced with challenging building internals.



The Universal Mounting bracket can be used with the Fireray 5000 detector head and the 1 or 4 way prism plates to enable the detector head or prism plates to be easily mounted and adjusted when fixing to angled walls or cladding.



The Flat Mounting plate is a metal plate which will support a single prism or 4 prisms, the side mounting holes are compatible with Unistrut® racking systems.



The large prism plate will securely mount 4 prisms and is designed to be used in conjunction with the Universal Mounting Bracket (not included)



The small prism plate will securely mount a single prism and is designed to be used in conjunction with the Universal Mounting Bracket (not included)

Product Codes

- 5000-005 Universal Mounting Bracket
- 5000-006 Flat Mounting Plate for 1 to 4 Prisms
- 5000-007 Prism Mounting Plate for 4 Prisms
- 5000-008 Prism Mounting Plate for 1 Prism

Linear Heat Detectors



Features

- Easy and cost effective installation
- Good sensitivity with adjustable alarm threshold
- Open and short circuit monitoring
- Suited for outdoor and indoor applications
- Can be used in hazardous areas
- Mechanical protection is provided for cables in areas where damage may occur
- Chemical resistance sheathing is available for areas where petro-chemical corrosion may occur.

Linear Heat Detection

The LD40 linear heat detection system is used to monitor fire (or overheat) conditions in confined or polluted areas or where there are adverse or unusually variable environmental conditions.

The sensor cable is unaffected by dust, moisture or vibration and requires little maintenance.

Technical Specification


Dimensions:	178H x 130W x 75D mm
Weight:	0.55Kg
Operating Temp:	-25°C to +70°C
Relative humidity:	Up to 98% RH non-condensing
Rating:	IP55
Operating Voltage:	+8 to +30Vdc
Quiescent Current:	60-80µA

Product Codes

516.016.005	LD40 High resistance sensor cable blue - 200M reel
516.016.006	LD40 High resistance sensor cable black - 200M reel (Nylon sheath suitable for petrochemical exposure)
516.016.010	LD40 EOL Termination kit (PK10)
516.016.011	LD40 In-line Jointing kit
516.016.012	LD40 Analyser module with conventional detection zone interface
516.016.201	B6782-003 EDGE CLIP 2-3mm WEB
516.016.202	B6782-024 EDGE CLIP 3-8mm WEB
516.016.203	B6782-025 EDGE CLIP 8-13mm WEB
516.016.204	B6782-026 EDGE CLIP 14-20mm WEB
516.016.205	B6782-004 'T' CLIP
516.016.206	B6782-005 PIPE CLIP
516.016.207	B6782-023 'V' CLIP
516.016.208	B6782-008 NEOPRENE SLEEVE
516.016.209	B6782-151 THERMAL SPACER
516.016.210	B6782-152 THERMAL SPACER



Ceiling Clip



Edge Clip



Pipe Clip



Thermal Spacer



V Clip

Detector Bases & Accessories



Features

- Optional short circuit isolator in each base
- Loop powered sounder bases
- Remote indication LEDs
- Standard and stainless steel duct probes
- Optional conduit entry backboxes
- Protective wire cages

Detector Bases and Ancillaries

The 800 Series of low profile detectors provides a comprehensive range of highly effective and aesthetically pleasing fire, smoke and heat detectors with worldwide approvals.

The unique design and leading edge technology of the detectors goes beyond the detection technology itself. The range of detector bases is designed to make low profile detector installations cost effective, aesthetically pleasing and easy to install and maintain – thus minimising disruption.

The detector bases include standard universal bases, which have no integral electronics, thus making them low cost and low maintenance. Alternatively, a range of functional bases incorporates sounders, relays and line isolators to provide a cost effective method of adding functions and flexibility to the fire detection installation.

Duct probe units are specially designed to enable optimum performance even at low air velocity and are also available in stainless steel.

Chapter 2 - MZX Technology

The standard universal detector bases are compatible with new 800 Series MX detectors as well as the Series 600 low profile detectors. The standard bases have no electronics and even when the detectors are connected to the bases, they can be electrically disconnected and left in a 'park' position. This enables wiring integrity tests to take place without any damage to electronics. When used with 800 Series MX VIRTUAL detectors the address flag automatically transfers to the base, thus the address label remains with the base even if the detector is changed or replaced. An optional, tool removable locking pin allows the detector to be fixed in place to prevent tampering.

5B-5" Universal Detector Base



This is the most commonly used base for MX applications. It is fully EN54 and Vds approved for use with the MX detector range and can also be used for the Minerva M900 addressable and Series 600 conventional ranges of detectors.

If used it will require a separately supplied tool to remove a detector from the base. Optional address label flags are automatically transferred from detector to base when the detector is inserted. Following detector removal flags are retained in the base to provide a permanent address indicator.

Features

- Drive a remote indicator
- Detector locking pin with every base
- Temporary Park position
- The 5' Universal Detector Base accepts an address label flag from the Detector when used with MX Detector Ranges
- Fit directly to a British or European conduit box or directly onto the ceiling.
- Break-outs for surface installation

Product Code

517.050.017
5B 5" Universal Base LPCB

4" Universal Base



4" Universal base. Used where space is limited or compatibility with older systems is required

Product Code

517.050.401
4" base

5BI-5" MX Isolator Base



The 5BI isolator base incorporates all the features of the 5B but it is used exclusively with digital addressable MX Technology® detection loops. They allow any or all detectors to be upgraded to incorporate bi-directional short circuit isolation. Used with every detector, they will ensure that no detector is lost in the event of an open or short circuit loop fault. A built in amber LED indicates when isolation has been activated. Isolation will automatically reset when the fault is removed.

Features

- All of the mechanical features of the 5B 5" Universal detector base.
- Provides upstream and downstream isolation as appropriate
- LED indication of isolation in operation

Product Code

517.050.018
5BI 5" Isolator Base LPCB

Chapter 2 - MZX Technology

The range of standard bases is supplemented by this selection of sounder bases, relay bases and accessories, including loop powered sounder base for use on MX technology controllers. In addition, changes to the building during it's life can be easily adapted to, by retrofitting sounders and relay outputs to existing detection points.

When functional bases are fitted to universal bases, they automatically lock into position. Removal is then achieved using the detector removal tool. This feature ensures that the detector and functional bases are removed separately.

Tyco MKII Sounder Base



A new low current range of sounder bases for use with Conventional and Addressable Fire Alarm Control Panels.

Features

- Manufactured to EN54 part 3
- Integral sounder and detector base
- Volume and tone adjustable after installation
- Low Power Synchronisation
- Do not require use of a standard base (maybe installed directly onto a standard besa box)

Product Codes

516.800.911
901SB Universal Sounder Base
516.800.910
802SB MX Loop Powered Sounder Base
516.800.913
812SB MX Loop Powered UL Sounder Base
516.800.912
912SB Universal UL Sounder Base
517.050.022
Volume Pot Spare Cover (1 sheet of 144)
517.050.005
4" Detector Base Locking Pin Kit (PK100)

SAB 801 Sounder Addressable Beacon



The SAB 801 Sounder Addressable Beacon is an MX Addressable Beacon that fits into the Standard Minerva Universal Base. Alternatively the SAB may be fitted to the 802SB, 812SB, 901SB and 912SB Sounder Bases to enable the MX Control Panel to communicate with and control these sounder bases and also provide a Flashing Beacon effectively turning the 802SB, 812SB, 901SB and 912SB into a combined addressable loop powered sounder and beacon.

The SAB is suitable for wall or ceiling mounting. Sound selection and tones will be as per the 802SB, 812SB, 901SB and 912SB.

Product Code

516.800.956
SAB 801 Low Power Sounder Addressable Beacon (Compatible with Consys Version 8.1 and above)

801RB - Functional Relay Base



The 801RB provides dual relay contacts for signalling external devices on MX addressable systems. A very low operating current even when the relay is energised enables the relay base to be used without any additional power. The dual contacts are under the control of a programmable output, through the powerful cause and effect software.

Features

- Dual pole 24V DC relay contact (60VA)
- Very low power consumption (<20 μ A except startup)

Product Code

516.800.905
801RB Relay base

Volume Adjustment Tool



A simple Volume Adjustment Tool, specific to the task of sounder volume selection on the "variable-volume" range of Tyco MKII Sounder Bases.

Sounder volume can be easily varied between the maximum 90dBA and minimum 68dBA-volume settings, using this simple, functional tool.

Product Code

517.050.015
Volume Adjustment Tool

Note: Sounder Bases are supplied with the volume pre-set to maximum volume.

Detector Ancillaries



800 Series MX Address Flag

The 800 Series detectors incorporate a feature, which automatically transfers the address flag to the detector base, when the detector is plugged into the base. On removal of the detector the address flag remains on the ceiling, thus ensuring that detectors are not accidentally returned to the wrong detector base following service routines.

Product Codes


516.800.915	MX Address flags (pack of 100)
516.800.931	Address flag labels Loop A - White
516.800.932	Address flag labels Loop B - Yellow
516.800.933	Address flag labels Loop C - Purple
516.800.934	Address flag labels Loop D - Green

Features

- Provides clear identification of address
- Colour coded
- Flag remains on base

Most MX detection panels incorporate additional fail safe software features to ensure that incorrect detector positioning does not compromise the system. Address flags are supplied in packs of 100. Labels are provided on sheets of 250 in eight colours to enable quick identification between different loops.

516.800.935	Address flag labels Loop E - Grey
516.800.936	Address flag labels Loop F - Blue
516.800.937	Address flag labels Loop G - Orange
516.800.938	Address flag labels Loop H - Red

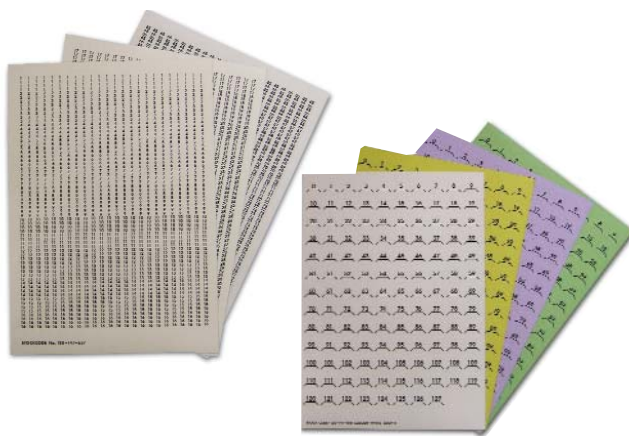

Callpoint & Ancillary Address Labels

Detectors have a special address flag for carrying the address labels - detailed in the detector section. For other devices or on detectors where zone information is also required a series of address labels are available.

Features

- Colour coded for Easy Loop Identification
- Space for Zonal Label
- Strong Adhesive Backing

Numbered 1 to 250, the address labels are available in 8 different colours to distinguish between different loops. In addition small zone labels can be fixed to the address labels.

Product Codes

<i>Zone Labels</i>	
599.047.011	Zone labels - Zones 1 - 16
599.047.012	Zone labels - Zones 17 - 32
599.047.013	Zone labels - Zones 33 - 48
599.047.014	Zone labels - Zones 49 - 64
599.047.015	Zone labels - Zones 65 - 80
599.047.016	Zone labels - Zones 81 - 100
599.047.018	Zone labels - Zones 101 - 120
599.047.019	Zone labels - Zones 121 - 140
599.047.020	Zone labels - Zones 141 - 160
599.047.021	Zone labels - Zones 161 - 180
599.047.022	Zone labels - Zones 181 - 200

599.047.023	Zone labels - Zones 201 - 220
599.047.024	Zone labels - Zones 221 - 240

Address Labels

599.047.030	Address Labels 1 - 250 Loop A - White
599.047.031	Address Labels 1 - 250 Loop B - Yellow
599.047.032	Address Labels 1 - 250 Loop C - Purple
599.047.033	Address Labels 1 - 250 Loop D - Green
599.047.005	Address Labels 1 - 127 Loop E - Grey
599.047.006	Address Labels 1 - 127 Loop F - Blue
599.047.007	Address Labels 1 - 127 Loop G - Orange
599.047.008	Address Labels 1 - 127 Loop H - Red

801RIL - Remote Indication LED



All detector bases have the ability to drive a remote LED in the event that the installed position of the detector is not easily visible. The 801RIL is primarily designed for LPCB influenced markets but is compatible with all 800 Series detectors.


Features

- UK Single gang mounting
- High intensity red LED

Product Code

516.800.908
801RIL remote indication LED

800HL - Indication Lamp



The 800HL remote indicator lamp provides a larger indicator for use in place of the RIL when longer distances are involved or in VdS influenced markets. Typically used to indicate the source of an alarm in buildings with long corridors eg. Hotels, hospitals, apartments.

Product Code

516.800.909
800HL indication lamp

EM-5B Euro Mounting



The euro-mounting base provides a matching back box, which allows the 5" bases to be ceiling mounted with conduit entries for standard 18 and 21mm conduit.

Features

- 2 x 18mm conduit entries
- 2 x 21mm conduit entries
- Fits all 5" Bases
- Fitted with terminal, if more are required use optional accessory kit

Product Codes

517.050.604
EM5B mounting base
517.050.612
Base Accessory terminal kit
(pack of 10)

DHM-5B - Deck Head Mounting



Where the detectors are mounted in humid and environmentally challenging situations such as marine or offshore installations, the DHM 5B deck head mount provides a sealed waterproof mounting which protects the base electrical connections. Can be screwed, bolted or welded to the deckhead. Supplied

with 1 terminal. If more are required, use the optional base accessory kit.

Features

- 4 x 20mm gland entries
- Fits ALL 5" bases
- IP55 with supplied gasket

Product Codes

517.050.603
Deckhead mounting
517.050.612
Base accessory terminal kit
(pack of 10)

Protective Detector Cage



Robust steel protective cage for Series 800 detector ranges using the 5" bases. Ideal for schools and sporthalls or whenever detectors need protection.

Strong coated steel construction with 4 point fitting.

Product Code

517.050.614
CW-5B Detector Cage

Protective Detector Sounder Base Cage




White powder coated steel protective cage for Series 800 Detectors fitted with a sounder base. Internal dimensions: 120mm dia x 80mm deep.

Product Code

517.050.011
Steel Protective Detector Cage

Duct Probe Air Sampling

Where smoke within duct work needs to be detected these duct probe units provide an economical solution, for use with 800 series detectors.



Warning

Duct probe units sited in the common duct work to several extract grills may fail to respond to smoke from any one extract due to the effect of dilution. The SMP units will not respond to airflow of less than 1.5m/sec.

	SMP69
Height	90mm
Width	150mm
Length	225mm
Weight	1.2Kg

SMP Duct Probe Units

The SMP Duct Probe Units are designed to be installed in air conditioning supply and exhaust ducts for the purpose of monitoring the airflow for smoke and combustion products.

The SMP69 probe units are designed to accept and operate with the 800 series detectors. For general applications it is recommended that photoelectric smoke detectors rather than ionisation smoke detectors are used.

The SMP stainless steel probe unit is designed to withstand the more demanding environments of the offshore oil and gas industries.

The units are designed to operate in airspeeds of 1.5 to 25 metres per second. A range of sampling tubes from 525mm to 1575mm is available

Technical Specification

Operating temperature:	-20°C to +70°C
Storage temperature:	-25°C to +80°C
Relative Humidity:	0 to 95%
SMP69	Stainless steel 316 housing with transparent polycarbonate cover

SMP69 Duct Probe Air Sampling - Stainless Steel



Product Codes

517.025.035

SMP69 Stainless Steel Duct Probe unit and universal detector base for Series 600/800 Detectors.

517.025.028

DPS450 Probe tube stainless steel 450mm and exhaust

517.025.029

DPS600 Probe tube stainless steel 600mm and exhaust

517.025.030

DPS750 Probe tube stainless steel 750mm and exhaust

517.025.031

DPS900 Probe tube stainless steel 900mm and exhaust

577.025.032

DPS1200 Probe tube Stainless Steel 1200mm and exhaust

517.025.033

DPS1500 Probe tube stainless steel 1500mm and exhaust

Datasheet - Product Code PSF92 "SMP69 Duct Probe Unit"
Manual - Vol01B-06-D1 "Detectors Fire Manual"



DPK4 Duct Probe

The DPK4 and DPK4I duct probe units have been developed to detect smoke in ventilation ducts. They offer significant benefits in terms of performance and installation. The system comprises a single duct probe tube and housing specially designed for optimum airflow through the smoke detector and suitable for use in incoming, outgoing and circulation air ducts of ventilation and conditioning systems.

The duct probes can operate across a wide range of airflow speeds and are especially recommended for installations in ducts with air flow velocities between 1 m/s and 20 m/s.

Unlike more traditional duct probe units that employ an inlet and exhaust tube with sampling holes, the DPK4 and DPK4I units use a highly efficient single sampling tube that is slotted along its length. This allows the sampling tubes to be cut to the desired length whilst maintaining maximum efficiency.

Features

- Built-in MZX Detector base
 - DPK4 - with built-in MZX detector base 5" - 5B
 - DPK4I - with built-in MZX detector base 5" - 5BI
- DPK4 is suitable for addressable and conventional systems
- DPK4I with built-in line isolator for use with MZX Technology® systems
- Suitable for air velocities from 1 m/s to 20 m/s
- Can be used in combination with a wide range of optical smoke detectors e.g. 801PH, 813P, 601P or 601PH
- One-pipe air sampling system simplifies installation
- Range of aluminium probe tubes are available for ducts up to 2700 mm
- Transparent lid allows detector to be seen
- Test hole on cover
- Sensitive flow indicator
- Simple service and maintenance
- Installer friendly connection of cables
- Easy installation of duct probe tubes

The transparent cover gives clear visibility of the detector, its LED indication and airflow indicator. A red plastic flag is fixed inside the housing providing a simple but effective confirmation that there is no leakage and that the air flow from the air duct is in fact passing through the housing.

In order to reduce the time required to test the duct probe detector during routine maintenance, an aperture is provided that allows aerosol test gas to be directed at the detector without having to dismantle the unit.

Accessories

Tyco Safety Products offer 3 lengths of the duct probe tubes. The tube is made of aluminium and can easily be shortened to suit the span of the air duct. Where the unit is mounted on insulated or circular air ducts, the DPKM mounting bracket is required.

Product Codes

517.025.049	DPK4 - Duct Probe with MZX detector base 5" - 5B
517.025.050	DPK4I - Duct Probe with MZX detector base 5" with isolator - 5BI
517.025.051	DPK600 - Duct Probe Tube 600 mm
517.025.052	DPK1500 - Duct Probe Tube 1500 mm
517.025.053	DPK2800 - Duct Probe Tube 2800 mm
517.025.054	DPKM - Duct Probe Mounting Bracket
517.025.055	Spare Filters for DPK4/DPK4I (PK of 10)

Detector supplied separately

MX Addressable Input/Output Modules

APM800 Addressable Power Supply Monitor



The APM800 is an MX addressable power supply monitoring module which is usually used with the PSM800/820/821 power supply module to make an addressable power supply. The APM800 is designed to fix to studs on the top of the PSM800/820/821. The APM800 monitors the PSM800/820/821 for mains failure, earth fault, battery charger fault and battery fault. It can reset the PSM800/820/821 resettable 24Vdc output and initiate a battery test which then reports battery voltage and current to the controller.

Technical Specification

EMC/RFI: Equal or exceeds EN50081- 1 & EN50130-4
 Operating Temp.: -20°C to +70°C
 Relative Humidity: up to 95% RH non-condensing
 Dimensions: 24H x 127W x 57D mm
 Weight: 0.794Kg

Product Code

557.202.027
 APM800 addressable power supply monitor

MIM800 Mini-Input Module



The MIM800 is a small MX addressable module designed for monitoring a single input circuit. The MIM800 can monitor normally open or normally closed inputs and provides open and short circuit monitoring of the line. The MIM800 is designed for fitting in small devices such as flow switches, special detection devices and explosion proof callpoints. A variant of the MIM800 is used in all callpoints and pullstations.

Technical Specification

EMC/RFI: Equal or exceeds EN50081- 1 & EN50130-4
 Operating Temp.: -20°C to +70°C
 Relative Humidity: up to 95% RH non-condensing
 Dimensions: 13H x 48W x 57D mm
 Weight: 100g
 EOL resistor: 200 Ohm
 Monitor Resistor: 100 Ohm

Product Code

555.800.001
 MIM800 mini-input module

CIM800 Contact Input Module



The CIM800 is a flexible addressable input-monitoring device that fits in the standard ancillary housings. The CIM800 provides two inputs to current MX panels though this can be implemented as two separately wired spurs (Style B) or as a loop (Style A). Both spur and loop input wiring can be configured to monitor normally open or normally closed inputs. In addition both can be configured to initiate an alarm or short circuit fault message in the event of a short circuit on normally open monitoring circuits.

Technical Specification

EMC/RFI: Equal or exceeds EN50081- 1 & EN50130-4
 Operating Temp.: -20°C to +70°C
 Relative Humidity: up to 95% RH non-condensing
 Dimensions: 14H x 148W x 87D mm
 Weight: 100g
 EOL & monitor resistor: 10k Ohms

Product Codes

555.800.002
 CIM800 contact input monitor
 555.800.032
 CIM800 Module c/w Front Cover

DIM800 Detector Input Module



The DIM800 is designed to power and monitor a circuit of low voltage conventional detectors and callpoints. The detection circuit is powered from an external 24V d.c. supply and is reset by the MX addressable panel. The DIM800 monitors the external 24V d.c. and provides a fault signal if it is lost. The input detection circuit can be wired as one or two spur circuits (Class B), one loop configured circuit (Class A) or one 4 wire detection circuit. The DIM800 is designed to be compatible with most conventional detection products. Compatibility has been tested to date on the following products: Compatible Thorn detectors: M300 Series, M601

Series, S100 Series, H Series, S231F, S231F+, CP200, Series 600 Compatible Zettler detectors: M613 Series.

Technical Specification

EMC/RFI: Equal or exceeds EN50081- 1 & EN50130-4
 Operating Temp.: -20°C to +70°C
 Relative Humidity: up to 95% RH non-condensing
 Dimensions: 14H x 148W x 87D mm
 Weight: 100g

Product Codes

555.800.012
 DIM800 detector input monitor
 555.800.042
 DIM800 Module c/w front cover

LIM800 Line Isolator Module



The LIM800 Ancillary Line Isolator Module is designed to be used on all MX addressable loops. It monitors the line condition and upon detection of a short circuit it isolates the affected section whilst allowing the rest of the addressable loop to function normally. The LIM800 Ancillary Line Isolator Module ensures that on a looped addressable system a short circuit fault cannot disable more detection devices than would be lost on a conventional non-addressable system in accordance with BS5839 Part 1.

Technical Specification

EMC/RFI: Equal or exceeds EN61000-6-3 & EN50130-4
 Operating Temperature: - 25°C to +70°C
 Relative Humidity: Up to 95% RH non-condensing
 Dimensions: 14H x 148W x 87D mm
 Weight: 100g

Product Codes

545.800.004
 LIM800 Ancillary Line Isolator Module
 545.800.033
 LIM800 Ancillary Line Isolator Module c/w front cover

TM520 Timer Module



The TM520 provides 2 x outputs that can be activated based on a delay time. If either the key-switch on the module is activated, or a predefined event within the control panel occurs then a timed delay (set between 10 minutes and 2 hours 10 minutes) is started. When the delay reaches zero the TM520 outputs are activated. The unit sounds an internal buzzer and shows a red LED when the outputs

are active, and shows a yellow LED when the timer is counting down. To provide a warning that the delay is nearly over, the red LED and the buzzer will pulse 5 minutes before the end of the delay .

The TM520 requires a separate 24V DC supply to operate. The module is not addressable and will therefore not take an address on the loop.

Technical Specification

Powered: 24Vdc
 Temperature Range: -10°C to +70°C
 Operating Humidity: <95% RH
 Dimensions: 87H x148W x 14D mm

Product Code

557.180.423
 TM520 timer module - non addressable

SIO800 Single Input/Output Module



The SIO800 Single Input/Output Module is designed to provide a monitored input and a volt free relay changeover output. It consists of an input for monitoring the status of a normally open contact and a single changeover relay contact. The relay is controlled by a command sent from the Minerva MX Fire Controller via the addressable loop.

The state of the relay (activated, deactivated or stuck) is reported to the Minerva MX Fire Controller. The LED may be turned ON or OFF by the controller during a relay activated condition.

Technical Specification

EMC/RFI: Product Family standard EN50130-4 in respect of Conducted Disturbances, Radiated Immunity, Electrostatic Discharge, Fast Transients and Slow High Energy. 61000-6-3for Emissions.
 Operating Temperature: -25°C to +70°C
 Relative Humidity: Up to 95% RH non-condensing
 Dimensions: 14H x 148W x 87D mm
 Weight: 105g

Product Codes

555.800.063
 SIO800 Single Input/Output Module
 555.800.064
 SIO800 Single Input/Output Module c/w Front Cover

DDM800 Universal Fire and Gas Module



The DDM800 provides the ability to connect and interface 2 zones of conventional 2 wire fire detectors or two 4-20mA sensors to the MX Fire alarm controllers.

When used to interface conventional detection devices, Open & Short circuit and device removal monitoring is provided.

Intrinsically safe (IS) detection is supported when used with a galvanic isolator

An integral line isolator is incorporated in the module.

Loop powered or 24vdc operation. The 4-20mA interface can be used to monitor devices such as gas detectors, temperature alarms or any

4-20mA interfaced device. Compatible with MXConsys version 15 or later

Technical Specification

EMC/RFI Equal or exceeds EN61000-6-3 & EN50130-4
 Operating Temperature -25°C to +70°C
 Operating Humidity Up to 95% RH non-condensing

Product Codes

577.800.006
 DDM800 Universal Fire and Gas Module
 577.800.036
 DDM800 Universal Fire and Gas Module c/w front cover
 577.800.056
 DDM800 Universal Fire and Gas Module housed in IP55 D800 enclosure
 557.800.057
 DDM800 Detector Removal End of Line Resistor (pack of 10)

RIM800 Relay Interface Module



The RIM800 provides a single programmable relay output from the MX DIGITAL addressable loop which can be programmed for a variety of applications including signalling fire conditions to plant, machinery, fire doors, dampers & security systems. The RIM800 relay coil is monitored. The RIM800 relay contact is rated for 2A @ 24V d.c. but can be used to switch mains voltage when used with the HVR800. This unit has two opto-isolated terminals specifically for driving the HVR800.

Technical Specification
 EMC/RFI: Equal or exceeds EN61000.6.3- & EN50130-4
 Operating Temp.: -20°C to +70°C
 Relative Humidity: up to 95% RH non-condensing
 Dimensions: 14H x 148W x 87D mm
 Weight: 100g
 Quiescent Current: 200µA
 Relay contacts: 2A @ 24V d.c.

Product Codes
 568.800.003 RIM800 relay interface module
 568.800.033 RIM800 Module C/W Front Cover

HVR800 High Voltage Relay Module



The HVR800 module is a non-addressable device which allows a low current mains rated relay to switch up to 10A. Alternatively a low voltage drive signal such as that provided by the RIM800 or 80 way mimic can be used to switch the integral mains relay via the opto-isolated input.

Technical Specification
 EMC/RFI: Equal or exceeds EN61000.6.3 & EN50130-4
 Operating Temp.: -20°C to +70°C
 Relative Humidity: up to 95% RH non-condensing
 Dimensions: 26.5H x 42W x 74D mm
 Relay Contacts: Up to 10A @ 250Va.c.

Product Codes
 568.800.004 HVR800 high voltage relay
 568.800.034 HVR800 in isolated D800 housing

SNM800 Sounder Notification Module



The SNM800 is a remote addressable sounder circuit output device capable of switching sounder and speaker circuits up to 2A @ 24V d.c. or provide a monitored output facility for other applications. These can be used in addition to the two circuits provided as standard on most MX detection panels. The SNM800 can support sounder circuits wired as a spur (Class B – Style Y) or in a loop configuration (Class A – Style Z). The SNM800 can be configured with a RIM800 to provide a secure monitored extinguishing release solenoid control.

Technical Specification
 EMC/RFI: Equal or exceeds EN61000.6.3 & EN50130-4
 Operating Temp.: -20°C to +70°C
 Relative Humidity: up to 95% RH non-condensing
 Dimensions: 14H x 148W x 87D mm
 Weight: 100g
 Output rating: 2A @ 24V d.c.
 EOL resistor: 27k 1/2W

Product Codes
 577.800.005 SNM800 sounder notification module
 577.800.035 SNM800 Module c/w Front cover

LPS800 Loop Powered Sounder Module



The LPS800 provides a single monitored sounder output circuit with up to 75mA of power sourced from the MX panel.

Technical Specification
 EMC/RFI: Equal or exceeds EN61000.6.31 & EN50130-4
 Operating Temp.: -20°C to +70°C
 Relative Humidity: up to 95% RH non-condensing

Dimensions: 14H x 148W x 87D mm
 Weight: 100g
 Output rating: 75mA @ 24V d.c. max

Product Codes
 577.800.011 LPS800 Loop Powered Sounder module
 577.800.041 LPS800 Module c/w front cover

NOTE: Each MX Digital Loop can provide up to 495mA for loop powered sounders and modules

SB520 Sounder Booster Module



The SB520 sounder booster module enables the SNM800 to drive circuits with higher currents whilst maintaining the reverse polarity integrity line monitoring.

Technical Specification
 EMC/RFI: Equal or exceeds EN61000.6.31 & EN50130-4
 Operating Temp.: -20°C to +70°C

Relative Humidity: up to 95% RH non-condensing
 Dimensions: 14H x 148W x 87D mm
 Weight: 100g
 Output rating: 15A @ 24V d.c./10A Max. per terminal
 Non addressable

Product Codes
 577.001.023 SB520 Sounder Booster Module
 577.001.033 SB520 Module c/w Front Cover

BDM800 Beam Detector Module - Loop Powered



The BDM800 Beam Detector Module is designed to interface the FIRERAY 50R or the 100R reflective beam detector to the MX Digital Addressable Loop. The BDM800 provides power from the loop, monitors the Fire and Fault outputs of the detector and also monitors inter-connections for open and short circuit faults. The BDM800 can also be used with the FIRERAY 2000 active infrared beam detector. Supplied fitted in a standard double gang ancillary housing, the BDM800 greatly simplifies the wiring normally associated with beam detection.

The considerable cost of providing local power supplies that satisfy the stringent requirements of BS5839 part 1 is eliminated.

Features

- Power Beam detectors directly from the MX Digital loop
- Reduced wiring and installation costs
- Monitors beam detector for fire and fault
- Inter-connection monitored for open and short circuit faults
- LPCB and VdS approved (pending)
- Can be installed to BS5839 part 1 2002

- On board LED indicates polling and active
- Use with reflective beams FIRERAY 50R or 100R for greater savings on installation
- Compatible with FIRERAY 2000 + FIRERAY 5000 beam detectors
- Optional BTM800 beam termination module to further simplify installation

Product Code

555.800.066
BDM800 Beam
Detector Module c/w Cover

BTM Beam Termination Module



In many cases it will be necessary to site the BDM800 Beam Detector Module some distance from the beam detector itself. To minimise and simplify wiring in such cases an optional unit, the BTM800 beam termination module is available. The BTM800 is also housed in a standard double gang ancillary cover

and has all the connections and components required to minimise installation time.

Features

- Simplifies the wiring between Beam detector and BDM800
- Allows BDM800 to be sited up to 40m from the beam detector

Product Code

555.800.067
BTM800 Beam Termination Module c/w Cover

MIO800 Multi-Input Output Module



The MIO800 is a general purpose interface module for use with MX technology™ fire detection systems. It allows multiple input and output connections to be made between external equipment and the MX Digital loop. Three input and four outputs are provided. Each input and output can be programmed independently using the MX Consys configuration tool to provide customised functionality.

An IP55 rated D800 style housing is used as the standard enclosure with the option of a DIN-rail mounting kit for in-cabinet installations.

Features

- Normally open or normally closed inputs
- Inputs monitored for open or short circuit faults.
- STYLE B (short circuit gives an alarm) or STYLE C (short circuit gives a fault) selectable for inputs
- Provides four digital outputs
- All four outputs can drive a self-powered high voltage relay HVR800
- Two outputs have both volt free change over contacts and HVR Drivers.

Technical Specification

Operating Temperature
-25°C to + 70°C
Storage Temperature
-40°C to +80°C

Operating Humidity
Up to 95% non-condensing
Dimensions (HWD):
Module 72 x 110 x 18mm
Boxed: 124.5 x 166.5 x 84.5mm
Weight:
Module 70g
Boxed 271g

Relay Contact Rating
DC - 2A @ 24V dc

Product Codes

555.800.065
Multi I/O Module
557.201.401
D800 Ancillary Housing
557.201.303
Din Rail Mounting Kit

TSM800 Door Control Module



The TSM800 is used to control fire doors in accordance with BS7273 Part 4. When activated, either by a fire signal or by a fault or isolation within the fire door zone, the TSM800 will interrupt the supply to the door holders and the doors under control of the module will close. The module has the provision to monitor a contact to report to the

fire controller if the door fails to close. The module also includes a built-in line isolator. This module requires MX Consys 10 or later to function.

Technical Specification

EMC/RFI: Equal or exceeds
EN61000.6.3 & EN50130-4
Operating Temp: -20°C to +70°C

Relative Humidity: up to 95% RH non-condensing
Dimensions: 14H x 148W x 87D mm
Weight: 100g
Relay contacts: 2A @30VDC

Product Code

555.800.069
TSM800 PCB

VIO800 MX Vesda Interface



The VIO800 MX Vesda Interface will enable all versions of the popular LaserPLUS Detectors and 7 relay versions of the Laser SCANNER Detectors to be interfaced directly to the MXDigital detection loops. 3 configurable inputs and 1 output signal are available from the interface enabling it to integrate fully with the Vesda detector.

This module is designed to fit in bay one of the Vesda Detectors.

Product Code

516.018.014
VIO800 MX VESDA Interface



Features

- Connects directly to the MX Digital Loop.
- Reduced installation time and cost since no external module is required.
- Easier Programming and Commissioning – predefined in MXconsys.
- EN60950:2000 Compliant PSU.
- EN50130-4:1996 & EN50081-1:1992 Compliant PSU.
- Mains and Fault LED Indicator on front cover.
- Output fuse protected.
- 24VDC Voltage Door Release Relay.
- Specifically designed for the safe actuation of release mechanisms for doors.
- Satisfies the requirements of BS7273 Part 4 for category A actuation of Fire Doors.
- Built in line isolator.
- Self monitoring operation.
- Approved to EN54-18 (Input/Output Devices) and EN54-17 (Line Isolators).

MZX Compatible 4 Amp 24VDC Addressable Door Holder PSU

The MZX compatible ELM24TSM 4 Amp 24VDC Addressable Door Control & Power Supply Unit, is designed to provide monitoring and activation in compliance with the most stringent local door control standards.

This Door Holder PSU is interfaced to the MZX Panels via an integral TSM800 Door Control Module which is field mounted inside the Door Holder PSU and connects to the MZX Detector Loop.

Technical Specification

Input Voltage:	230VAC +10%/-15% 50Hz
Output Voltage:	24VDC
Output Current:	4 Amps Continuous
Temperature:	-10C to +40C
Relative Humidity:	95% RH
IP Rating:	IP41 (excluding rear face)
Material:	1.2mm white powder coated steel
Dimensions:	230mm (W) x 200mm (H) x 80mm (D)

Product Code

558.004.011	ELM24TSM 4 Amp 24VDC Addressable Door Holder PSU
-------------	--

Housings

MX Ancillary Housings

A variety of ancillary housings are available to fit the 800 Series MX ancillaries. The standard sized modules are mechanically compatible with all options. LPCB approvals are with the M520 double gang cover plate or ancillary housings. The M520 double gang cover provides external access for the MX SERVICE TOOL to plug into the ancillary module which is mounted in the cover. All options allow the ancillary to be programmed and tested when the cover is removed.

M520



M520 Ancillary cover for use with 800 series modules. Will fit onto a MK style double gang back box.

Product Code
517.035.007
M520 Ancillary Cover

D800



D800 IP55 ancillary housing 140W x 120H x 70mmD incorporates window to view module LED

Product Code
557.201.401
D800 IP55 Ancillary Housing

ANC-3 Ancillary Housing



ANC-3 MINERVA ancillary housing - for use with M800 ancillary modules (can accommodate up to 3 M800 modules). 340W x 290H x 90mm D

Product Code
557.180.097.A
ADT Branded

ANC-8 Ancillary Housing



ANC-8 MINERVA ancillary housing - for use with M800 ancillary modules, houses 8 modules, expandable to 16 using the STK8 stacking kit. 440W x 320H x 140mm D

Product Codes
557.180.096.A
ADT Branded
557.180.095
STK8 stacking kit

DIN Rail Mounting Bracket







DIN Rail mounting bracket enables any module which can be mounted to a M520 ancillary cover to be DIN rail mounted using this bracket. Clip-on PCB mounting pillars are included. Will fit standard 35mm DIN Rail bracket.

Product Code
547.004.002
DIN rail mounting bracket



Chapter 2 - MZX Technology

QFB/2	
	<p>QFB/2 Dry lining flush mount (for plasterboard etc) MK backbox for use with 800 Series addressable ancillaries using 517.035.007 cover.</p> <p>Product Code 517.035.015 QFB/2 Dry lining flush mount backbox</p>
K2214 ALM	
	<p>K2214 ALM Metal surface mount MK backbox for use with 800 Series addressable ancillaries using 517.035.007 cover.</p> <p>Product Code 517.035.011 K2214 ALM Metal Surface Mount MK backbox</p>
MK K2142	
	<p>MK K2142 White plastic surface mount MK backbox for use with 800 Series addressable ancillaries using 517.035.007 cover.</p> <p>Product Code 517.035.010 MX K2142 White plastic surface mount backbox</p>
8621C	
	<p>8621C Steel flush mount MK backbox for use with 800 Series addressable ancillaries using 517.035.007 cover.</p> <p>Product Code 517.035.014 8621C Steel Flush Mount MK Backbox</p>

Technical Specification

Product Code	MK Ref	Mounting	Dimensions	Knockouts	Earth Screw	Material
517.035.011	K2214	Surface	146x86x40mm	1x20mm rear/7x20mm sides	Yes	Steel
517.035.010	K2142	Surface	146x86x34mm	One rear (25x35mm)	N/A	Plastic
517.035.014	8621C	Flush	132x72x26mm	4x20mm rear/12x20mm sides	Yes	Steel
517.035.015	QFB/2	Flush/ Dry Lining	146x85x38mm	2 top & bottom	N/A	Plastic

Callpoints



Features

- Integral LED indicator for easy identification of operation
- Surface or flush mounting
- Extensive range of digital addressable callpoints
- Test key facility, speeds maintenance visits
- Hazardous areas models available (See Special Hazards Section)
- IP67 Waterproof models for external applications

CP Series Callpoints

A comprehensive range of callpoints for use with addressable systems. All the callpoints are designed to enable an alarm signal to be given by breaking a glass element.

This operates a switch and is indicated by an LED indicator. If required, an optional transparent hinged cover may be installed to guard against accidental operation.

Technical Specification


(Indoor & Outdoor)

Housing:	PC/ABS
Operating Temp.:	
Outdoor	-25°C TO +70°C
Indoor	-10°C TO +55°C
Relative Humidity:	up to 95% RH (non-condensing)

Callpoints CP820/CP830 Indoor/Outdoor


Indoor Callpoint

Weight: 110g



Outdoor Callpoint

Weight: 240g

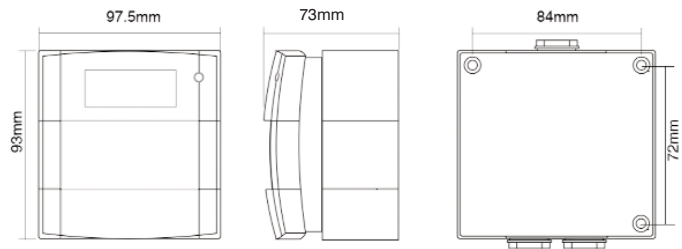

CP820 Indoor Callpoint



The CP820 is an indoor MX addressable manual callpoint with programmable status LED. The CP820 is designed for LPCB approvals and the CP820M for Marine approvals. The CP820 provides high speed communication to the MX panel of a manual fire alarm.

Technical Specification

Meets BS5839 Pt.2 and pr EN54

Pt:11

EMC/RFI: EN50130-4/
EN61000-6-3

Operating Temp.: -10° to +55°C
Relative Humidity: up to 95% RH

non-condensing
Dimensions: 93H x 89W
x 59.5D
(27.5 mm flush
mount)

Weight: 110g
IP Rating 24D

Product Codes

514.800.603.T
CP820 Indoor Callpoint
(Thorn Branded)
514.800.603.A
CP820 Indoor Callpoint
(ADT Branded)
514.800.603.Y
CP820 Indoor Callpoint
(TYCO Branded)
514.800.605.T
CP820M Marine Indoor Call Point
(Thorn Branded)

CP830 Outdoor Callpoint



The CP830 is an outdoor MX addressable manual callpoint with programmable status LED. The CP830 is designed for LPCB approvals and the CP830M for Marine approvals. The CP830 provides high speed communication to the MX panel of a manual fire alarm.

Technical Specification

Meets BS5839 Pt.2 and pr EN54

Pt:11

EMC/RFI: EN50130-4/
ENG61000-6-3

Operating Temp.: -25° to +70°C
Relative Humidity: up to 95% RH
non-condensing

Dimensions: 93H x 97.5W x
73Dmm

Weight: 240g
IP Rating 67

Product Codes

514.800.604.T
CP830 Outdoor Callpoint
(Thorn Branded)
514.800.604.A
CP830 Outdoor Callpoint
(ADT Branded)
514.800.604.Y
CP830 Outdoor Callpoint
(TYCO Branded)
514.800.606.T
CP830M Marine Outdoor Callpoint
(Thorn Branded)

Chapter 2 - MZX Technology

Callpoint Ancillaries



Product Codes
90-107

Red M141 spacer for red CP200/800 KAC callpoints



515.001.045

Test keys for all MCP and CP style callpoints



515.001.128


Callpoint hinged cover for use on MCP callpoints models (Colour - Clear)



515.001.026

Black callpoint bezel for CP200/800 models.

Ancillaries - Back Boxes




Product Codes

515.001.021

Standard Red surface mounting back box for MCP & CP indoor callpoints

Unless stated the indoor callpoints are supplied as flush mount units. The range is approved for use with the standard backbox. However, SR2-T backboxes are also available.



10-115

SR2-T Optional Back Box (2 terminals)

Callpoint Spare Glasses - Current



Product Codes

515.001.119

EN54 Part 11 Spare Glass for MCP and CP series Callpoints (Pack of 5)

515.001.127

Deformable operating unit "glass" for use in place of glasses, for kitchens or other areas where glass is not acceptable. For MCP callpoints only.

515.001.025

CP200/500/900 Glasses, clear English text on white background. No logo (Pack of 5).



Features

- Prevents accidental operation of callpoints
- Strong polycarbonate construction
- Optional break seal kit

STOPPER


The callpoint STOPPER provides protection from malicious or accidental activation of manual callpoints. Available for flush or surface mounted callpoints the 'STOPPER' is also available with optional high pitch sounder which is activated when the lid is lifted.

An optional 'Break-Seal' fitting kit allows 'Break-Seals' to be used to provide extra protection.

WARNING:- Break seals only to be fitted by agreement with relevant fire authorities.

The STOPPER is suitable for all callpoints up to 100mm square.

Product Code	Ref	STOPPER		STOPPER II	With Sounder	Weatherproof
		Flush	Surface			
515.001.029	STI6530	✓				
515.001.030	STI6531		✓			
515.001.036	STI6535		✓			✓
515.001.034	STI1230			✓		
515.001.035	STI3150			✓		✓
515.001.031	STI6532	✓			✓	
515.001.032	STI6533		✓		✓	

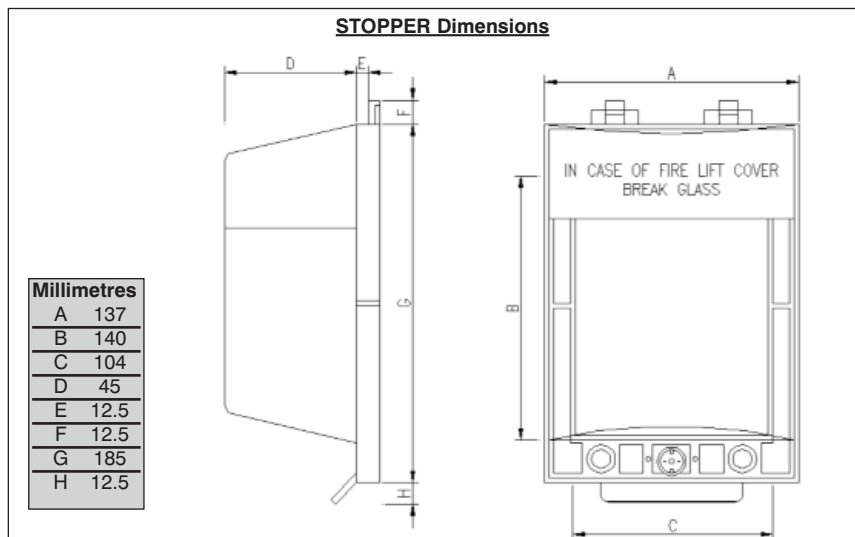


Product Code

515.001.033 IPO36 Break Seal Kit (pack of 1)

	Flush Fit	Surface Fit (+30mm)
Stopper	STI6530	STI6531
Stopper with Sounder	STI6532	STI6533

	STOPPER	STOPPER II
Max. Callpoint Size	100 x 100mm	160 x 160 mm
Max. Callpoint Depth	57.5	120
	(+30mm Surface)	

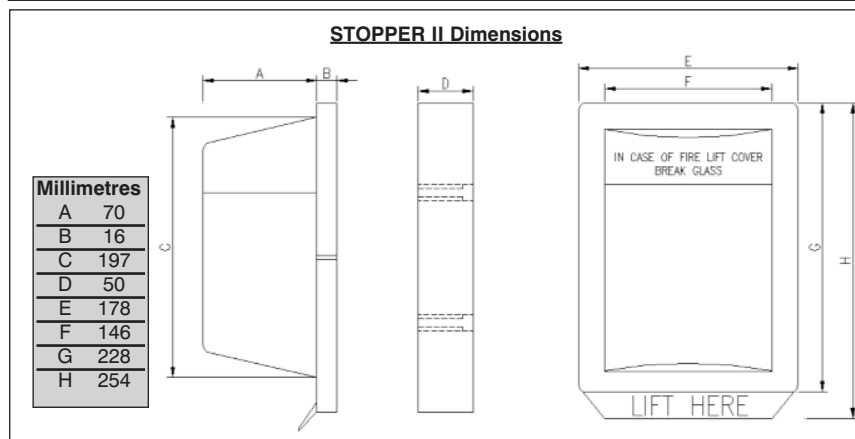

Stopper II Surface Fit - STI1230



Features

- Strong polycarbonate construction
- Will accommodate weatherproof callpoints
- Tamper resistant

STOPPER II

STOPPER II is constructed as the STOPPER from tough injection moulded polycarbonate. Physically larger than the STOPPER the STOPPER II extends the number of products to which these tough multi-purpose covers can protect.

It consists of a strong tamper-proof clear polycarbonate cover and frame that fits easily over such products as break glass callpoints.

STOPPER II can also be fitted with an integral battery powered sounder which activates if the cover is lifted.

The STOPPER II is suitable for callpoints up to 160mm square.

Product Code

515.001.034 STI1230 Surface Fit STOPPER II



Features

- Strong polycarbonate construction
- Provides environmental protection
- Ideal for offshore environments

Weather STOPPER & Weather STOPPER II

The Weather STOPPER and Weather STOPPER II extends the life of weather exposed devices, such as break glass callpoints, by offering protection against harsh conditions and environments. Experience has shown that this protective cover can extend the life of products installed in saline atmospheres, such as oil rigs and ship decks.

While offering environmental protection the Weather STOPPER and Weather STOPPER II are constructed from tough durable polycarbonate which will also guard against tampering, vandalism or accidental operation of devices such as emergency switches.

Product Codes

515.001.036 STI6535 Surface fit Weather STOPPER
515.001.035 STI3150 Surface fit Weather STOPPER II

Smoke Beam/CCTV Guard



The Smoke Beam/CCTV Guard is manufactured from tough coated steel rod and is designed to protect projected beam detectors or CCTV cameras from vandalism or accidental damage.

Suitable for use with System Sensor, Hochiki and Fireray 2000 detectors.

Technical Specification

Dimensions: 260H x 200W x 321D mm

Product Code

516.015.009

STI9625 Smoke beam/CCTV guard

Keybox



This tough polycarbonate breakglass keybox is available to protect emergency keys.

Product Code

515.001.043

STI6720 Keybox with printed glass

Sounders & Beacons



Features

- Wide range of both bells and electronic sounders
- High sound output characteristics
- Low current consumption
- Clean lines, modern styling
- Easy to install, low installation costs
- Weatherproof units for outdoor use
- Distinct sounds are available
- Motorised and Solenoid bells available
- Wide range of voltages available

Sounders

A range of sounders to meet a wide variety of alarm applications where loud, penetrating and distinctive warnings must be given to alert people of fire situations.

In addition, multi-tone electronic sounders can give a variety of sounds to signal other conditions e.g. "extinguishing gas release imminent," etc.

Note: For I.S. & Flameproof sounders, please see the special hazards section in Chapter 10.



Features

- High output programmable sounder base and sounder beacon base
- One point of installation for detector, isolator, sounder & beacon
- Loop powered from the MX Technology® Digital Loop
- High brightness Multi-LED Beacon
- Software programmable
- 15 Tones and 2 Flash Rates
- Integral line isolator
- RSM (Reflective Sound Monitoring)
- Can be used as a standalone device using the sounder blanking cap
- Optional surface mount plastic conduit adaptor

Sounder/Beacon and Sounder Bases

One Point of Installation – Unique Solution with Huge Savings

Combining a detector base, sounder, beacon and line isolator in one low cost unit will result in a dramatic reduction in the final installation cost. Typically 40% to 55% of the installation costs per point can be saved. This presents an exciting opportunity for sellers in the DDA compliant market. This is achieved without the need for specialist high cost detector heads as standard 800 series Minerva® MX detectors are used.

Unique

When used with the 801PC 3oTec detector ADT can provide a completely unique solution combining fire detector, toxic gas detector, isolator, sounder and beacon into a single very cost effective point of installation.

Reflective Sound Monitoring (RSM) – Patented* Solution significantly reduces Risk

Reflective Sound Monitoring is employed to monitor the audio output of the LPSB3000 and LPAV3000 by listening to the output and reporting any sounders that are not working. RSM is a Tyco patented* technology and was successfully introduced with the Minerva® MX Loop powered Symphoni sounders. It is particularly beneficial during regular weekly sounder tests where users can be satisfied that all their sounders are working, even if the building is not fully occupied at the time of the test. Failure of the beacon would also generate a fault at the Minerva® MX control panel.

Loop Power Capacity

The advanced 3000 series sounders and beacons are independently addressed and are therefore separately controllable from the Minerva® MX Digital loop. The maximum number that can be driven from a single loop is dependant on the number of addresses available, the volume selected and the flash rate of the beacon. MXDesigner version 5.0 should be used to accurately determine loop loading and battery size. Typically, at full volume of 90dBA, 50 x LPSB3000 sounders or 35 x LPAV3000 sounder beacons at 0.5Hz flash rate can be driven by a single 1Km loop. That gives a typical maximum of 280 sounder beacons at full volume from a single 8 loop Minerva® MX panel.

Built-in Isolation

As the line Isolator is now integral to the device the need for separate line isolation devices is reduced.

Tones

15 Tones are available from the sounder, which include tones compatible with the LP Symphoni range, 802SB sounder base and the LPBB520 (loop powered Besson Banshee). 4 sound levels 60dB to 90dB (± 3 dB) and 2 flash rates 1/2Hz & 1Hz are available

MXConsys

The AV base range of devices are fully supported by Consys Version 14 and later, the point input dialog box provides an easy method for setting the Tones, Volume and Flash rate of the device. The only operation required at the device is to set the address using the 801AP device programmer.

Technical Specification

System	For use with MX/ZX fire alarm controllers
Environment	Up to 95% RH (non condensing) IP Rating 21 C EN60529
Temp- Operating	-20°C to +70°C
Temp - Storage	-25°C to +70°C
Dimensions	102 mm dia x 42 mm high
Weight:	LPSB3000 0.160 kg LPAV3000 0.170 Kg
Materials	Housing ABS FR & Polycarbonate
EMC	The range complies with the following: Product family standard EN50130-4 in respect of conducted disturbances, radiated immunity, electrostatic discharge, fast transients and slow high energy EN61000-6-3 for emissions

Product Codes

516.800.957	LPSB3000 Sounder only L/P addressable base
516.800.958	LPAV3000 Sounder beacon L/P addressable base
516.800.959	DAB3-4 Mounting flange – type B for conduit (supplied in packs of 10)
557.001.040.A	Mark 2 Sounder Cap (ADT Branded)
557.001.040.Y	Mark 2 Sounder Cap (Tyco Branded)

Note: Detectors supplied separately



Features

- Loop Powered – Reduced installation costs
- High Output/Low consumption – Lower lifetime costs
- Indoor and Outdoor models – Same sounder tones in all areas
- Sounder/LED Beacon Version – DDA Compliant
- 16 Tones and 2 Flash rates – Suits individual requirements
- Reflective Sound Monitoring RSM - Reassurance that ALL sounders are working
- Integral Line Isolator – Saves cost and installation time

Loop Powered Symphoni Sounders and Sounder Beacons

Models Available

The Sounder only models are available with a red or white housing suitable for indoor use and an IP65 rated red housing for outdoor applications.

The Audio / Visual models, which incorporate a highly efficient LED beacon, are also available with a red or white housing for indoor use and an IP65 rated red housing for outdoor applications.

Reflective Sound Monitoring

Up to now sounder circuits have been monitored up to the EOL but not the individual sounders, fault detection has relied on human feedback from the weekly tests that should be carried out to meet the requirements of BS5839.

The LP Symphoni utilising Reflective Sound Monitoring (RSM) employs a transducer to actively monitor the units sound output during the weekly sounder test and will report back to the MX controller if it fails to detect the sounder operating when it has been commanded to, this ensures that the LP Symphoni range of sounders will in the unlikely event of a fault, display it immediately on the fire controller and is therefore not dependant upon the staff within a building reporting a sounder failure.

Technical Specification

Operating temp

Indoor devices -10°C to +55°C

Outdoor devices -20°C to +70°C

IP rating

Indoor devices IP21C

Outdoor devices IP65

EMC

Product family standard EN50130-4 in respect of Conducted Disturbances, Radiated Immunity, Electrostatic Discharge, Fast Transients and Slow High Energy

EN61000-6-3 for Emissions

Built-in Isolation

As the line Isolator is now integral to the device the need for separate line isolation devices is reduced.

Tones

16 Tones are available from the sounder, which include tones compatible with the 802SB sounder base and the LPBB520 (loop powered Besson Banshee). Dutch slow whoop and the DIN 1Hz sweep are included. Two sound levels 103dB & 90dB (± 3 dB).

MXConsys

The LP Symphoni range of devices will be fully supported by Consys Version 10 and later, the point input dialog box provides an easy method for setting the Tones, Volume and Flash rate of the device. The only operation required at the device is to set the address using the 801AP device programmer.

Product Codes

516.800.960	LPSY800-R L/P Symphoni (indoor use) red
516.800.961	LPSY800-W LP Symphoni (indoor use) white
516.800.962	LPSY865 L/P Symphoni IP65 (out door use)
516.800.963	LPAV800-R L/P Symphoni Sounder/Beacon (indoor use) red
516.800.964	LPAV800-W L/P Symphoni Sounder/Beacon (indoor use) white
516.800.965	LPAV865 L/P Symphoni Sounder/Beacon IP65 (outdoor use)

Tyco MKII Sounder Base



A new low current range of sounder bases for use with Addressable Alarm Control Panels.

Features

- Manufactured to EN54 part 3
- Integral sounder and detector base
- Volume and tone adjustable after installation
- Low Power Synchronisation
- Do not require use of a standard base (maybe installed directly onto a standard besa box)

Product Codes

516.800.910
802SB MX Loop Powered Sounder Base
516.800.913
812SB MX Loop Powered UL Sounder Base
517.050.022
Volume Pot Spare Cover (1 sheet of 144)
517.050.005
4" Detector Base Locking Pin Kit (PK100)

SAB 801 Sounder Addressable Beacon



The SAB Sounder Addressable Beacon is an MX Addressable Beacon that fits into the Standard Minerva Universal Base. Alternatively the SAB may be fitted to the 802SB, 812SB, 901SB and 912SB Sounder Bases to enable the MX Control Panel to communicate with and control these sounder bases and also provide a Flashing Beacon effectively turning the 802SB, 812SB, 901SB and 912SB into a combined addressable loop powered sounder and beacon. The SAB is suitable for wall or ceiling

mounting. Sound selection and tones will be as per the 802SB, 812SB, 901SB and 912SB.

Product Code

516.800.956
SAB 801 Low Power Sounder Addressable Beacon (Compatible with Consys Version 8.1 and above)

Volume Adjustment Tool



A simple Volume Adjustment Tool, specific to the task of sounder volume selection on the "variable-volume" range of Tyco MKII Sounder Bases.

Sounder volume can be easily varied between the maximum 90dBA and minimum 68dBA-volume settings, using this simple, functional tool.

Product Code

517.050.015
Volume Adjustment Tool

Note: Sounder Bases are supplied with the volume pre-set to maximum volume.



Features

- Solenoid Operated
- Designed for Long Life
- Stove Enamelled Dome

6" Red Solenoid Operated Friedland Bell

The bells are the underdome type, with a high resonance pressed alloy-steel gong to ensure a loud clear ring tone.

The operating mechanism is fully enclosed and the gong is red stove enamelled for long life. The bells are designed for internal use, but gasket sealed conduit boxes can be provided for external use.

Product Codes

576.500.014	240V Red bell 6" 240Vac solenoid operated. 'Fire' text
576.500.015	24V Red bell 6" 24Vdc solenoid operated. 'Fire' text
577.001.002	Weatherproof gasket box for use with Solenoid operated bells



Features

- CE marked
- Low current 6" bell (ONLY 11mA)
- Low cost
- Extra high 95dBA/m
- Slim profile (53mm)
- Fully suppressed and polarised
- Quick and easy to install
- LPCB approved to EN54 Pt 3

6" & 8" Motorised Bells

Model	MBF-6EV	MBF-8EV	MBA 8EV
Rated Voltage	24V d.c.	24V d.c.	24V d.c.
Rated Current	11mA	17mA	18mA
Sound output	90-95dBA	90-97dBA	91-97dBA
Operating Temp	-12 to +50°C		-10 to +50°C
Colour	Red		
Weight	410g	640g	1100g with back box

Product Codes

576.501.039.A	MBF-6EV ADT Branded
576.501.039.T	MBF-6EV Thorn Branded
576.501.040.A	MBF-8EV ADT Branded
576.501.044.A	MBA-8EV ADT Branded
576.501.044.T	MBA-8EV Thorn Branded
576.501.045	BBX4 (2) W/P Backbox for MBA-8 Bell



Features

- Weatherproof Option
- Flexible Mounting Option
- Attractive Design

Electronic Solenoid Bell

Unique patented alarm bell with miniature solenoid and integrated electronic control. No backbox required for surface wiring.

Technical Specification

Dimensions: 6" diameter
Voltage: 18-30Vdc
Typical Current: 24Vdc@30mA
Typ. Sound Output: 94dB (A)@1m

Product Codes

20-100 6" 24Vdc Electronic bell, weatherproof
20-101 6" 24Vdc Electronic bell - red
20-111 6" 24Vdc Electronic bell - white



Features

- New Aesthetic Design
- 32 Selectable Tones
- 3 Volume Settings
- Push and Twist Mount
- Low Current Consumption

Banshee Multi-Tone Sounder

The Banshee Multi-Tone Sounder replaces the well established range of Banshee and Bedlam sounders. The new range provides a compact unit capable of 32 tones and also incorporating a volume control.

The Banshee is easily installed and is fitted with robust loop through terminations. The design incorporates a bayonet push and fit feature for easy installations.

Technical Specification

LPCB and Vds approved to EN54 pt 3
Low Current consumption
32 Tones
3 Volume settings
Rated at IP66 or IP45
Operating temperature: -40°C to +70°C
Operating Voltage: 9 to 30 Vdc

Product Codes

576.501.005.A Banshee Multi-Tone Sounder Red, Low profile base (ADT) (Replaces 576.501.004.A & 576.001.008.A)

576.501.005.T Banshee Multi-Tone Sounder Red, Low profile base (Thorn) (Replaces 576.501.004.T, 576.501.008.T & 576.501.019)

576.501.016.A Banshee Multi-Tone Sounder Red, Weather Proof base (ADT) (Replaces 576.501.015.A & 576.501.024.A)

576.501.016.T Banshee Multi-Tone Sounder Red, Weather Proof base (Thorn) (Replaces 576.501.015.T & 576.501.024.T)

576.501.025.A Banshee Multi-Tone Sounder White, Low Profile base (ADT) (Replaces 576.501.033.A)

Accessories



The combined mounting bracket for the Besson Multi-tone Banshee and Xenon Beacon allows quick and neat installation of combined sounders and beacons. The bracket allows the following electronic sounders to be mounted with the range of 1W Xenon Beacons:

- Besson Banshee
- MINERVA FIRECRYER voice enhanced sounder

The bracket can be used with any of the 24Vd.c 1W Xenon beacons in red, clear, amber or blue (Part no.'s 540.001.030/031/032 & 033)

Product Code

576.501.047
Banshee/Xenon bracket

Besson Wafer Sounder



The standard Besson Wafer sounder is supplied in white with a blank cover included. The specification is as follows:
Input voltage: 24V d.c. (+/-25%)
Sound Output: 60dBA/90dBA at 1m typical (pot. Adjustable) offering the same sound formats as the Banshee sounder range. It can therefore be used in conjunction with the Banshee sounders on the same site.

Technical Specification

Current: 4mA to 15mA
Temperature Range: -40°C to + 70°C
Dimensions: Dia 103mm, Height 22mm (excluding coverplate)

Product Code

576.501.038
Besson wafer sounder and blank cover in white

Flush Mount Bedroom Sounder



Meeting the requirements for BS5839 part 1, the Bedroom Sounder range is well suited to hotels and residential environments where aesthetics is a prime concern. Matching the sound output of the Banshee range of sounders so therefore they can be mixed on the same site.

Features

- Low current consumption 7mA
- Dual sound options selected via a jumper switch: 'Continuous' and 'Fast Sweep' 90dB
- Can be both Flush and Surface mounted
- Robust terminal connectors to accommodate up to 2.5mm² conductors

Product Codes

576.501.032.A
Flush Mount Sounder ADT Branded
576.501.032.T
Flush Mount Sounder Thorn Branded

Yodalarms



This versatile range of sounders are ideally suited for fire, safety and security hazard warning.

Technical Specification

Dimensions:
YO3: 89H x 89W x 85D mm
YO5: 134H x 134W x 128D mm
YO8: 216H x 216W x 153D mm

Product Codes

576.501.001
YO3 Yodalarm 3" 24Vdc 100dB @ 1Mtr
576.501.002
YO5 Yodalarm 5" 24Vdc 106dB @ 1Mtr
576.501.003
YO8 Yodalarm 8" 24Vdc 112dB @ 1Mtr

24Vdc Symphoni Sounder



The 24Vdc Symphoni Sounder is a general purpose internal sounder, available either as a very high output sounder for noisy areas, or a high output low current sounder for applications where power is limited. Both versions share the same horn and backbox which has double cable entries for ease of installation.

The low power version has 3 selectable tones which may be employed for one, two or three stage alarm applications. The high output version has 32 selectable tones and retains full tone compatibility with the Roshni, Squashni and Askari product ranges.

Product Codes

576.501.200

SY/R Low Power Red Symphoni Sounder (3 tone)

576.501.201

SY/W Low Power White Symphoni Sounder (3 tone)

576.501.202

SYHO/R High Output Red Symphoni Sounder (32 tone)

576.501.203

SYHO/W High Output White Symphoni Sounder (32 tone)

Technical Specification

Model	Symphoni High Output	Symphoni (Low Power)
Operation	2 Hours Continuous	Continuous
Operating Voltage Range	9-28Vdc	12-30Vdc
Sound Output @ 1m	Up to 120dB(A)	100dB(A) +/- 2dB(A) @24Vd. c.
Volume Control		Down to 80dB approx.
Current Consumption	240mA +/- 20mA on Tone 3	5mA +/- 1mA at all volumes
Tones	1 to 32	Alternating 990Hz/650Hz@2Hz Continuous 990Hz Intermittent 990Hz, On/Off@1Hz
Synchronisation	Synchronised Start	Synchronised Start
Frequency Stability	+/- 0.15%	+/- 0.5%
Operating Temperature	-25 °C to +55°C	-25°C to +70°C
Line Monitoring Method	Polarised Input	Polarised Input
Construction	ABS Plastic Case	ABS Plastic Case
Ingress Protection	IP42	IP42
Weight	0.58Kg	0.212Kg

Roshni



A flexible alarm sounder for Fire and Security applications complete with volume control and dil switch to provide 32 tones.

Low profile Roshni with Deep base offers IP65 protection. All Roshni sounders have synchronised start for self synchronisation without third wire.

Technical Specification

Dimensions: 93 Dia x 105D mm (Deep base)
Colour: Red or white
Output Voltage: 9-28Vdc
Typical Current: 24Vdc@16mA
Typ. Sound Output: @1m 102dB

Product Codes

ROSHRDSR

ROSHNI Sounder c/w deep base - red

576.501.220

ROSHNI Sounder c/w shallow base - red

576.501.221

ROSHNI Sounder c/w shallow base - white

576.501.222

ROSHNI/Flashni Deep Base - Red

576.501.223

ROSHNI/Flashni Deep Base - White



Features

- 4 predefined voice messages
- Custom messages available
- Low current consumption

Firecryer

The FIRECRYER is an electronic sounder which provides as default the same electronic sound as the MT Besson Banshee and in addition, provides 4 predefined voice messages, which can be synchronised across a zone of sounders.

The FIRECRYER offers an excellent service upgrade opportunity in the UK for systems installed to BS5839pt1 and may also provide opportunities elsewhere.

Technical Specification

Dimensions:	IP45 - 92dia 61.3 Hmm IP66 - 92dia 85.5 Hmm
Operating Voltage:	Nominally 24Vdc Min. 18Vdc Max. 30Vdc
Current Consumption:	Average 19mA Min. 10mA Max. 23mA (Subject to message)
Sound output:	Fast sweep - 100dBA
Voice message:	97dBA approx
Polarity D.C.	reverse polarity protection
Operating Temp:	-25°C to +70°C
Humidity:	90% relative humidity (non-condensing)
Weatherproofing:	Standard base - IP45 Special base - IP66
Housing Material:	Red Flame-retardant ABS
Standard Messages:	
AK	- "Fire Emergency, please remain calm and evacuate the building immediately."
AB	- "This is a fire alert. This is a fire alert. Await further instructions. Await further instructions."
SP	- "This is an ADT fire alarm test. No action required."
AD	- "Fire Alarm Test Now Complete."

Product Codes

576.501.042	Banshee IP66 backbox for Firecryer Sounders
576.501.052	Mini Fire Cryer Voice Enhanced Base Sounder Cable Spacing Ring
576.501.051	Multi Message Synchronised Mini Fire Cryer Voice Enhanced Base Sounder
576.501.035.A	MFC4SUA 4 message Red ADT Branded Fire Cryer Sounder
576.501.104.A	MFC4SCA Custom Message Red ADT Branded Fire Cryer Sounder
576.501.105	MFC-CM Fire Cryer Custom Message Chip

FIRECRYER cont'd

Additional Features

Four Message

With four messages fire tests can be easily differentiated from alert and evacuate messages.

Two Wire Connection

The FIRECRYER uses a standard 2 wire 24V d.c. connection to carry power, message switching and message synchronisation. This enables a quick and easy upgrade to existing bells and sounders.

MINERVA MT Banshee Compatible

The electronic alarm sound and mechanics of the FIRECRYER are the same as other Banshee sounders in the range. This allows them to be mixed with other sounders in a zone. It also means that existing Banshees can be very quickly upgraded to FIRECRYERS.

Multi Message Variants

Multi-message versions only require a multi-message switching PCB added at the fire panel which then allows all FIRECRYERS on two sounder circuits to be synchronised.

Low Power

The FIRECRYER takes marginally more power than an equivalent electronic sounder. This enables voice enhanced sounders to be offered without the high additional cost of large battery backups.

Standard Products

The FIRECRYER is available in ADT branding with pre-defined English messages and 100dBA fast sweep alert sound to comply with BS5839Pt1. Other variants with different branding, languages, messages and different tones are available upon request.

Product Codes	Product Reference	Message				Brand	Synchronised
		1	2	3	4		
576.501.035.A	MFC4SUA	AK	AB	AD	SP	ADT	Yes
576.501.104.A	*MFC4SCA	Customer Defined				ADT	Yes
576.501.051	F/C/4A	AK	AB	AD	SP	-	Yes

* For recording of special messages there is a charge. This can be ordered under product code 576.501.105 MFC-CM. This includes the supply of a different timer chip for the FIS/VMC synchronisation board.

Single Gang Lamp/Buzzer Units



Lamp Buzzer units may be used for local alarms when high level audible warnings may not be appropriate. Available in flush and surface mount versions to fit standard single gang backboxes.

Features

- Low Current
- Flush or Surface Mount
- Hi-Brightness LED

Technical Specification

Dimensions: 90H x 90W
x 40D mm
Current Rating: 15mA at 24Vdc
nominally

Product Codes

540.011.012
Single gang flush mount LED (red)/Buzzer Unit labelled 'Fire Alarm'
540.011.013
Single gang surface mount LED (red)/Buzzer Unit labelled 'Fire Alarm' c/w surface backbox.

Solista LED Beacon



Ultra low power requirement 3mA or 6mA at 24Vdc. Long life low profile design. Protected to IP54, supplied complete with base.

Product Code

576.501.230
Solista LED Beacon (Red)

Easy AV™ Retrofit LED Beacon



This low power LED beacon is designed to be retrofitted to existing Banshee electronic sounders. Easy and fast installation typically 3 min. Low power 6mA max at 24Vdc. High Output LEDs.

Product Code

576.501.012
Easy AV strobe for Banshee Sounders



Features

- Available in 1, 2, 3 and 5 watts
- Protected to IP65
- Attractive low profile design
- Optional bracket for mounting both Beacon and Banshee Sounder

Xenon Beacons - 24V Including Surface Mount Adaptor

This high quality range of Xenon beacons are tested to IP 65 making them ideal for the most stringent applications.

Each beacon incorporates a low profile Fresnel lens designed to give maximum light output.

Technical Specification

Voltage V d.c.	Power Output Watt(s)	Alarm Current mA	Flash Rate	Rating	Temp. Range	Dimensions (mm)	
						Height	Diameter
24	1	42	60/min	IP65	-30 to +70°C	51	75
24	2	84	60/min	IP65	-30 to +70°C	51	75
24	3	126	60/min	IP65	-30 to +70°C	51	75
24	5	210	60/min	IP65	-30 to +70°C	75	90

Product Codes

540.001.030	Low profile clear 24Vdc 1 watt
540.001.031	Low profile blue 24Vdc 1 watt
540.001.032	Low profile amber 24Vdc 1 watt
540.001.033	Low profile red 24Vdc 1 watt
20-112	Low profile red 24Vdc 2 watt
20-113	Low profile red 24Vdc 5 watt
20-120	Low profile red 24Vdc 3 watt



Features

- High Power – 10 Candela
- Current Surge Suppression
- High Efficiency – 88mA at 24VDC
- 1 Hz Flash Rate
- Protected to IP54
- Wide Operating Voltage – 10 to 60 VDC
- Operating Temperature -25°C to + 70°C

Solex 10 cd Xenon Beacon

A Solex 10 Candela Xenon Beacon with a red lens and a white shallow base which can be used wherever a high power xenon beacon is required.

Due to the high power output and current consumption it is recommended that this device is not used with the MZX-c, MZX-c+ or similar small panels (an SB520 sounder booster module and PSU may be required in some cases).

Product Code

576.501.232	Solex 10 cd Beacon with red lens and white base
-------------	---



Features

- Combined strobe & sounder
- Matches Roshni sounders
- Weather Resistant to IP65

Flashni

A combined sounder and beacon which combines the features of the Roshni electronic sounder with a fully integrated Xenon beacon.

These sounders are fully compatible with all Roshni tones.

Technical Specification

Dimensions:	93 Dia x 92D mm (Shallow base)
	93 Dia x 121D mm (Deep base)
Output Voltage:	18-30Vdc
Typical Current:	68mA@24Vdc
Typ. Sound Output:	101dB (A)@1m

Product Codes

20-118	Combined Roshni sounder/strobe complete with deep base (IP65).
576.501.224	Combined Roshni Sounder/Strobe, Red Body/Red Lens complete with shallow base & tone switch.
576.501.227	Combined Roshni Sounder/Strobe, Red Body/Red Lens, deep base, tone switch & separate sounder/strobe operation.



Features

- Combined Sounder and LED Beacon
- Low Current -10mA @ 24VDC
- 6 selectable tones
- Volume control (2 levels)
- White housing, clear lens with red LED's
- DDA compliant audio visual solution for UK
- Neat unobtrusive design
- Ideal for hotels, care homes, schools & offices
- Independent power cables allow a large number of AV platform sounders to be driven from a single 24V circuit
- 90dB sound output
- >1Cd light output at 1 Hz
- Approved to EN54-3 (pending)

Squashni G3/AV Sounder Beacon

This low current combined sounder/beacon is ideal for standalone usage utilising the optional blanking cap or can be used in conjunction with a 4" base and detector. When used with a detector it will provide a single point of installation for the detector, sounder and beacon.

This is a conventional sounder / beacon and needs to be powered from the panel sounder outputs or a sounder module.

Product Codes

576.501.250	Squashni G3/AV Sounder Beacon
576.501.255	Squashni G3/AV Blanking Cap – Pack of 5
517.050.401	4" Universal Base
517.050.005	4" Detector Base Locking Pin Kit (PK100)

Software Tools & Accessories

MX Technology Fire controllers are supported by a comprehensive suite of software programmes which provide key features to enable fast and accurate configuration and commissioning of the MX systems.

MXConsys

MXConsys, the highly flexible and extremely powerful programming tool that has been used successfully with MX systems since day one. Specially designed for MX it is constantly being extended and refined to meet ever changing demands. Available for free download from the Tyco Fire and Security Website but requires a dongle and license to operate.

Incorporated into MXConsys is MXConsys-Express – An alternative approach to system configuration that simplifies the programming effort by automating many of the processes. Its heart lies in a number of pre-defined templates that have been expertly designed to match a selection of building types. The demands on users in terms of experience and training are considerably reduced.

MXDesigner

MXDesigner is a sophisticated engineering design tool that not only ensures system parameters and design rules are obeyed but are key to the ordering and documentation processes. Battery calculations, loop loading calculations, remote bus parameters, system schematics and parts lists are all included. The extensive use of graphics and 'drag and drop' techniques makes the system easy and quick to use. In addition, a design module for the intrinsically safe MXDigital detectors and associated system 800 components is included. Available for free download from the Tyco Fire and Security Website.

MXFlow

MXFlow - If you have ever been involved in the configuration process for a complex 'cause and effect' programme, you will appreciate the benefits of an automated method of documenting your work. MXFlow does just that; it takes your MXConsys 'event action' and transcribes it into a graphical format that is comprehensive and easy to follow. It can be a valuable commissioning tool that saves time and effort as well as an easily understood form of documentation for future service use.

Available for free download from the Tyco Fire and Security Website to authorised personnel.

MXChecker

MXChecker - MXChecker replaces, in software, all configured MX loop devices on a single panel. It offers a user the following major functionality:

Connection to a panel directly, or indirectly via the MXNetwork (in the same way Consys does to perform a download/upload).

Provides the input status of each and every device configured on the Loops, e.g. make a Sounder go 'No Response', a detector appear active, etc.

The ability to display the General Status of each and every Point configured on the Loops, e.g. indicate a Sounder is Isolated, a Callpoint is Disarmed, a Detector is Resetting, etc. The ability to display the Output Status of each and every Point configured on the Loops, e.g. indicate a Sounder is being driven to P1, a Relay Module is not being driven, etc.

MXLogger

MXLogger – MXLogger enables the engineer to selectively monitor any device or devices on the addressable loops. The returned values are displayed on a PC screen and can be saved to a file for later analysis. Available for free download from the Tyco Fire and Security Website.

MXRemote

MXRemote - Remote communications software provides a fast and efficient means of diagnosis without anyone having to leave the office. In situations where access to a site may be difficult or where an attending technician requires high level assistance then MXRemote is the tool for the job. Using modems, MXRemote can link to the MXDigital fire system via PSTN or IP and once connected, becomes an integral part of the fire system, acting as a fully functional repeater. All system functions are then available to the MXRemote operator. Available for free download from the Tyco Fire and Security Website but requires a dongle and license to operate.

MXService Tool

The TYCO MXService tool is a powerful and flexible tool for assistance in the installation, commissioning, diagnostics and service of Tyco MX detection systems. The MXService tool allows all MX addressable devices to be interrogated, tested and programmed. Suitable for desktop or single handed operation the MXService tool is battery operated using standard rechargeable batteries.

MXLoop Tester

The MXLoop Tester can test, commission and fault-find a loop of up to 250 MX analogue addressable detectors/devices, without a fire panel. A laptop is generally used for operation & display, but a "One Person Installation Mode" is automatically enabled on power up.

Identifies all devices on the loop, determining addresses and types. Over-addressed (>250), unknown device types, and, generally, duplicate addressed devices are recognised. Monitors analogue values of all detectors/modules on the loop to determine device status: normal/alarm/fault/dirty etc.



Features

- MZX Product Line Overview.
- Key Terms & Conditions.
- Key Functions & Features.
- System Display and Controls.
- Set Time and Date.
- Enter Pass Codes
- Customer Operator Access Levels.
- Accept Fire Alarm Events.
- Accept Incoming Events.
- Walk Test.
- Isolate Detectors.
- Isolate Field Devices.
- View Status of a Loop Device.
- View Event Log.
- Interpret System Faults.
- Carry out Routine Testing.


MZX Interactive Training CD

An Operator Training CD which contains an interactive training programme that provides information on the MZX Fire Detection System.

Product Code

TCD-1

MZX Interactive Training CD

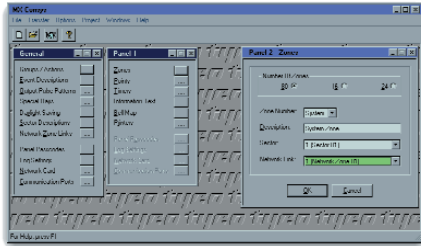

MXConsys

MXConsys is a powerful Windows programming tool which provides full system programming functions and project configuration and issue control. MXConsys is used on MINERVA MX, MX2, T2000 & MZX panels.

Features

- Programs the system across multiple sub-panels
- Downloads to the system from one point
- Provides Firmware download as well as configuration download
- Dongle protected
- Provides full project configuration printouts. Includes MX consys express

It also supports automatic data transfer to MXGraph & TXG graphical mimic and alarm management systems. MXConsys is available under document control from authorised personnel in the Tyco businesses.

Product Codes

557.203.001	MXConsys Dongle and license (parallel)
557.203.003	MXConsys Dongle and license (USB)
557.202.118	MXConsys Download lead



MXRemote

MXRemote is a Windows based software tool for remote service and support of MX detection panels. MXRemote provides a full function fire panel repeater running on a PC either locally or over dial up telephone lines or via the internet. Providing the operator has the correct passwords MXRemote allows all operator, manager, service and engineer functions available at the panel to be provided at the PC.

Features

- Facilitates remote diagnostics
- Display identical to panel view
- Remote Assistance

This allows the customer or the Tyco service organisation to provide remote assistance, service and limited configuration assistance to the installation.

MXRemote is available as a stand-alone software application for Tyco service operations. Alternatively Tyco Safety Products are able to provide consultancy and assistance in implementing MXRemote as an integrated part of a central station and service centre system.

Product Codes

557.203.002	MXRemote dongle and license (parallel)
557.203.004	MXRemote Dongle and license (USB)
557.202.116	MX-FIM Modem Lead
UDS1100	Lantronics Device Server LAN

Programming and Service Tools



Features

- Read/write the detector/ancillary address
- Display date of manufacture and commissioning
- Display serial number
- Display temperature/ CO levels / smoke obscuration
- Programming of the LED
- Testing the detector remote LED and control outputs
- Perform the detector self verification test function
- Displaying detector dirtiness level
- Controlling ancillary outputs
- Reading ancillary statuses
- Power management options

MXService Tool

The TYCO MXSERVICE tool is a powerful and flexible tool for assistance in the installation, commissioning, diagnostics and service of Tyco MX detection systems. The MX SERVICE tool allows all MX addressable devices to be interrogated, tested and programmed.

Suitable for desktop or single handed operation the MXSERVICE tool is battery operated using standard rechargeable batteries. An accessory pack provides alternative straps, and cigarette lighter adaptor. The MXService tool has a finite life time after which the software must be recharged by an MX authorised administrator.

Product Codes

516.800.918	801AP MXService tool
516.800.922	Spare ancillary programming lead
516.800.924	Pack of Spare Pins (Pk 10)
516.800.926	MXService Tool PMS Dongle Parallel
516.800.927	MXService Tool PMS Dongle (USB)
516.800.929	PMS Programming Lead



Features

- Compact
- Organises Tools
- Sturdy Construction Protects Tools

MXService Accessory Kit

A carry case which contains the following items:-
Car Lighter Adapter
Shoulder Strap

This provides space for the following:-
801AP MXService Tool
Ancillary Programming Lead
Mains Charger

Product Code

516.800.923	MXService accessory kit
-------------	-------------------------



Features

- Pre-Programmed with latest AVR firmware
- Powered from XLM Loop card or FIM, No external power required
- Simple to operate
- Compact handheld device
- Complete with ribbon cable and connector

MXService Tool

This unit will allow the MZX Technology® Fire Controller Loop Drivers to be updated to the latest software version. When required upgrades can be performed easily and quickly in the field with minimal system downtime. The MZX AVR Programmer is designed for use with MX, MZX, ZX and T2000 addressable fire controllers, please check document 17-05-AVR for compatibility details.

Technical Specifications

2 Button Keypad
3 Status LEDs
Operating Temperature 0°C to 50°C
Size 189 x 80 x 31

Product Code

516.800.941 Tyco MZX AVR Programmer



Features

- Ability to commission loops without a panel
- Verify installed loops before connection to panel
- Fault find loops whilst disconnected from panel

MXLoop Tester

The MX Loop Tester can test, commission and fault-find a loop of up to 250 MX digital addressable detectors/devices, without a fire panel. A laptop is generally used for operation & display, but a “One Person Installation Mode” is automatically enabled on power up.

Identifies all devices on the loop, determining addresses and types. Over-addressed (>250), unknown device types, and, generally, duplicate addressed devices are recognised. Monitors analogue values of all detectors/modules on the loop to determine device status: normal/alarm/fault/dirty etc. Provides alarm test for detectors that support it.

Allows Walk Test. Any device going into alarm is shown on the laptop with address and time. Walk Test Status (devices not tested yet) can be requested. Walk test mode overrides detection algorithm delays for fast testing.

Monitors loop current and status, identifying open / short and over-current conditions. Details devices present on each side of break (so that position of break or tripped isolator can be determined).

Includes commands to operate device LED and control output modules (relays and sounders).

Turns on LED of faulty detectors (when there is no alarm) to aid visual identification.

Automatic addressing mode allows un-programmed devices to be added in sequence and be automatically addressed. Detailed diagnostics and commissioning modes via laptop.

Technical Specification

Powered from 110V/230V mains supply via 24V, 3A plug pack, or from 24V batteries (batteries not included).

Dimensions

Unit: 200mm x122mm x 46mm
 Carry Bag: 250mm x 250mm x 70mm
 Weight: 2 kg (without battery)

Product Codes

557.203.021	MXLoop tester with EUROPEAN/UK MAINS to IEC CABLE
557.203.022	SPARE ECM prog DB6 (FEM) - DB9 (FEM) null modem
557.203.023	Spare carry bag with 2 pockets and strap
557.203.024	Spare PSU 90-264VAC IN/24VDC 3A out
557.203.026	Spare MX loop tester battery lead set



MX Service Case

There are 12 main circuit boards shared between the Minerva® MX1000, MX4000 and MX2 Control Panels, Repeater Panels and Black Box Panels. The Engineers Minerva® MX Service Kit is designed to hold one of each board in a convenient lightweight and portable case that will protect the boards whilst taking the minimum amount of space in a service engineer’s vehicle. The case also contains a fault finding manual and list of spares part numbers for re-order.

Features

- Lightweight
- Convenient
- Compact

The Engineers Minerva® MX Service Kit allows a service engineer to carry onto site, sufficient spares to effect a panel repair efficiently and in a professional manner. It will avoid unnecessary return trips to the service vehicle or branch to collect spares and negates the need to carry cumbersome panels & enclosures in service vehicles.

The contents of the case are detailed in the Service and Spares section of this catalogue.

Product Code

557.202.299 MX Service Case

Service & Spares

Keys & Keyswitches

557.203.005	Set of spare keys for MX Panel (AL102)
557.180.209	Keyswitch assembly for use with MX2 controllers (spare)
557.180.208	MX2 Spare Keys
557.201.508	MZX Spare Key Set

Housings & Metalwork

557.201.300	BFP801 Blank Half Module - Grey Overlay
557.201.306	Standard MX Expansion backbox and chassis plate
557.201.310	Deep MX Expansion backbox and chassis plate
557.202.206	MX2 expansion aperture installation kit

CPU FIMs & Loop Cards

557.202.000	FIM801 1-Loop Field I/F Module
557.202.001	FIM802 2-Loop Field I/F Module
557.202.008	FIM801CV – T2000CV only
557.202.007	XLM800 2-Loop Expansion Card
557.202.002	CPU800 Central Processor Unit

Power Supplies

557.202.003	PSM800 Power Supply Unit
557.202.004	LBM800 Loop Booster Module PCB
557.202.403	PSM800M Marine approved PSU
557.202.405	PSB800M Marine approved PSU c/w Loop Booster
557.202.210	PSU830 Power Supply with Loop Booster
557.202.208	MX2 8 Loop Expansion kit
557.201.210	Dual power supply mounting kit
557.202.050	PSM800 Temp Sensor Accessory Kit
557.202.113	PSB to FIM Cable
557.202.608	PMM800 Power monitor module
557.202.609	BAQ60T24 2.5A MZX PSU
557.202.610	BAQ140T24 5A MZX PSU

Indication & Expansion

557.202.013	OCM800 Operator Control Module
557.202.019	ODM800 Operator Display Module
557.202.021	ANN840 40-Way Alarm/Fault LED Module
557.202.022	ANN880 80-Way Alarm LED Module
557.202.020	COM820 20-Way Status/Command Module
557.202.200	DCM800 MX2 Display Control Module (without LCD assy)
557.202.201	ANN881 80 Way Zonal Display (for MX2 Panels)
557.202.601	DCM816 16 zone display PCB for MZX125
557.202.602	DCM832 32 zone display PCB for MZX250/251/252
557.202.209	MX2 LCD assembly
557.202.028	RSM800 Power Supply
557.180.053	RBUS Driver Chip
557.180.052	Serial Printer Driver Kit

Callpoint Key & Glasses

515.001.045	MCP test key
515.001.119	MCP EN54 Spare Glasses pk of 5

MX Service Tool

516.800.922	MX Service tool, Spare programming lead
516.800.924	MX Service tool, Spare pins for programming lead pk of 10

MX Loop Tester

557.203.022	MX Loop Tester ECM Prog Null Modem
557.203.023	MX Loop Tester Carry Bag
557.203.024	MX Loop tester PSU
557.203.026	MX Loop Tester Battery lead set

MX Service Kit

557.202.299	The Engineers Minerva MX Service Kit
-------------	--------------------------------------

The Engineers Minerva MX Service Kit consists of an MX Service Case and the following MX Spare Service PCB's:-

1 x Minerva 16 way input/output module
1 x FIM802 2 loop field interface module
1 x CPU800 1MB CPU PCB
1 x PSB800M panel power supply c/w loop booster module
1 x IOB800 8 Input/8 Output Expansion Board
1 x XLM800 2 Loop Expansion Module + Cable
1 x OCM800 Operator Control Module
1 x ODM800 Operator Display Module
1 x DCM800 Display & Control Module
1 x PSU830 Panel Power Supply C/W Loop Booster Module
1 x MX2 LCD Assembly
1 x MPM800 Multi Purpose Interface Module

Control Panels and Repeater Panels



Features

- 2, 4 and 8 zone versions available.
- Supports the complete range of EN54 approved series 600 detectors including photo multi-sensor and CO multi-sensor.
- Supports Tyco twin wire sounders on all eight detection zones.
- Drives up to 3 repeater panels (4 and 8 zone panels).
- Access to controls via key switch.
- Space for 2 x 3.4 A/H batteries providing up to 72 hour standby.
- Remote control inputs for class change, alert, evacuate, silence alarms and reset.
- Zone 1 configurable for latching or non latching.
- Selectable zonal or general alarm sounder operation.
- Alert sounder option.
- Configurable zone co-occurrence for automatic detectors.
- Fully monitored fire signalling output.
- Single pole volt free change over fire relay output.
- Single pole volt free change over fail safe fault relay output.
- Short circuit fire option.
- Auxiliary 24VDC 250mA power supply output.
- Open collector output for buzzer active, disablement active and evacuate active.
- Earth fault monitoring.
- Zone/Output disablement for each zone, fire signal output and all sounders.
- Buzzer disable feature.
- One man zone test.
- One man sounder test.
- Automatic fire detector and manual alarm call point fire event discrimination.
- Alarm counter.
- Compatible with diode bases for detector removal.

Minerva® MZX-c

The Minerva MZX-c range of conventional twin wire fire alarm control panels will satisfy a wide range of applications from 2 to 8 zones and have many features that are normally associated with more expensive addressable systems.

The Minerva MZX-c range of conventional fire detection control panels are designed to be both installer and user friendly. A high degree of flexibility and programmability allows the systems to be customised without the need for any configuration software.

The range consists of 2, 4 and 8 zone panels together with an 8 zone repeater which is compatible with the 4 and 8 zone variants. The matching repeater panel has an inbuilt 240Vac power supply.

Chapter 3 - Conventional Systems

Technical Specifications

	Panels			Repeater
	2 Zone	4 Zone	8 Zone	8 Zone
Electrical				
Mains Supply	230VAC +10% - 15%			
Power Consumption (max)	138W			
PSU/Charger Output	1.5A			
Sounder Circuits 24VDC Nominal	2 x 0.5A	4 x 0.5A	4 x 0.5A	N/A
Aux DC Output 24VDC Nominal	0.25A			N/A
Maximum Battery Space	2 x 3.4 A/H (PS-1230)			
Environmental				
Operating Temperature	-5 °C to +40 °C			
Operating Humidity	95% Non Condensing			
Mechanical				
Dimensions (W x H x D mm)	365 x 273 x 110			
Weight Excl Batteries Kg	2.2			
Enclosure Colour	Light Grey RAL7035			

Product Codes

[508.031.004.EG](#) MZX-c 2 ZONE PANEL TYCO 2 WIRE
[508.031.005.EG](#) MZX-c 4 ZONE PANEL TYCO 2 WIRE
[508.031.006.EG](#) MZX-c 8 ZONE PANEL TYCO 2 WIRE
[508.031.016.EG](#) MZX-c 8 ZONE REPEATER PANEL



Minerva® MZX-c+

The MZX-c+ range of Conventional Control Panels are designed to be both installer and user friendly.

They are designed and manufactured to a high standard and are approved by LPCB to EN54 parts 2 & 4.

These Panels are available in 4,8,16 & 32 zone versions along with suitable Repeaters for all models.

The 8 to 32 Zone Panels are capable of driving any combination of 8 channel output expansion boards (relays, alarm circuits & open collector 0v outputs) up to a maximum of 12 boards which can be set to zonal activated or common output modes.

Each Panel has extensive configuration options but remains easy to install, program and operate and are supported by detailed documentation on commissioning, operation and maintenance.

The Panels are designed to work with a wide range of manufacturers detectors (in addition to Tyco detectors) and are suitable for use in many types of installation including upgrades and new installations

Ancillaries and Expansion

- C1631 Repeater Interface Board provides a port for driving up to 5 repeater panels. One C1631 Repeater interface board is required for the panel and one for each repeater. Repeaters are supplied with a C1631 fitted.
- C1630 Output Expansion Interface Board provides a port for driving up to 12 output expansion boards.
- EXP 4 and EXP 4 PSU Expansion Housings are designed to house any combination of up to four output expansion boards. The PSU version is equipped with a 5A 24Vdc power supply with space for 2 x 12V 12Ah batteries. Housing dimensions 325W x 370H x 126D mm
- EXP 5 and EXP 5 PSU Expansion Housings are similar to the EXP 4 and EXP 4 PSU but accommodate five output expansion boards. Housing dimensions 400W x 441H x 131D mm

Features

- 4, 8, 16 and 32 zone versions available
- Semi-Flush mounting using optional bezel
- Supports the complete range of EN54 Approved Series 600 Detectors including photo multi-sensor and CO multi-sensor
- Compatible with System 620 ATEX and IECEx approved intrinsically safe system
- Extensive custom options programmable via switches and front panel controls
- Two stage alarms and investigate delay options
- Day/Night modes and alarm counter (with optional timer module)
- Full EN54 zone operation with options for non-latching, short circuit alarm or indication only circuits

- C1633 LED Driver Board provides eight open collector outputs rated @ 60mA. Outputs can be zonal alarm or common alarm.
- C1634 Relay Output Module provides eight volt free changeover contacts rated at 1A 30Vdc. Outputs can be zonal alarm or common alarm.
- C1635 Monitored Output Board provides eight fault monitored 24Vdc outputs. Power can be derived from the control panel or an external source. Outputs can be zonal alarm or common alarm..
- C1651 MZX-c+ Timer Module is an optional plug-in board with an alphanumeric LCD to provides a real-time clock display. The clock can be programmed to provide investigate delays, sequential alarms and day night settings. The unit is also used to store and display a total count of the number of times the panel enters the alarm condition. Can be fitted to 8, 16 and 32 zone panels.

Additional Benefits

- Inputs for remote Silence, Evacuate, Reset and Class change
- Configurable monitored or volt free outputs for Fire, Fault and Protection
- Outputs for zones 1 to 4 (open collector) with 8, 16 or 32 zonal outputs provided by optional expansion boards
- Outputs for Disablement active, Evacuate active and buzzer active (open collector)
- Volt free reset relay. Active for 10 seconds following a panel reset
- 8 to 32 zone systems can drive up to 12 expansion input / output modules per panel
- Drive up to 5 repeater panels

Chapter 3 - Conventional Systems

Technical Specifications

	Panels				Repeaters		
Electrical							
	4 Zone	8 Zone	16 Zone	32 Zone	8 Zone	16 Zone	32 Zone
Mains Supply	230Vac +10% - 15%						
Power Consumption	85W	165W	165W	240W	85W	85W	85W
PSU / Charger Output	1.5A	3.0A	3.0A	5.0A	1.5A	1.5A	1.5A
Sounder Circuits 24Vdc nominal	4 @ 500mA	4 @ 1A	4 @ 1A	4 @ 1A	N/A	N/A	N/A
Aux. DC Output 24Vdc nominal	500mA	1A	1A	1A	N/A	N/A	N/A
Maximum Battery Space	2 x 12Ah	2 x 12Ah	2 x 12Ah	2 x 17Ah	2 x 12Ah	2 x 12Ah	2 x 17Ah
Environmental							
Operating Temperature	-5 to +40 °C						
Operating Humidity	5% to 95% non-condensing						
Mechanical							
Dimensions (W x H x D mm)	325x370x126			400x441x131	325x370x126		400x441x131
Space for 8 way expansion	N/A	2 Boards	2 Boards	Use Exp Hsg	N/A		
Weight Excl. Batteries Kg	6.2	7.1	7.1	10.25	6.2	6.2	7.6
Enclosure Colour	RAL7035 Light Grey						

Product Codes

508.032.002.EA	MZXC+ 4 Zone Panel English/Arabic
508.032.003.EA	MZXC+ 8 Zone Panel English/Arabic
508.032.004.EA	MZXC+ 16 Zone Panel English/Arabic
508.032.005.EA	MZXC+ 32 Zone Panel English/Arabic
508.032.006.EA	MZXC+ 8 Zone Repeater 240Vac English/Arabic
508.032.007.EA	MZXC+ 16 Zone Repeater 240Vac English/Arabic
508.032.008.EA	MZXC+ 32 Zone Repeater 240Vac English/Arabic
508.032.012	MZXC+ 4 Way Expansion Housing
508.032.013	MZXC+ 4 Way Expansion Housing with PSU
508.032.014	MZXC+ 5 Way Expansion Housing
508.032.015	MZXC+ 5 Way Expansion Housing with PSU
557.201.502	Flush Mount Bezel for MZXC+ 4/8/16 Zone Panel and Repeater
2605060	C1630 O/P Expansion Interface Board
2605061	C1631 Repeater Interface Board
2605062	C1632 16 Zone Interface Board
2605063	C1633 LED Driver Board
2605064	C1634 Relay Output Board
2605065	C1635 Monitored Output Board
2605070	C1651 MZX-c+ Timer Board



Features

- Developed for use in vessels which require between 4 and 32 zones of fire detection.
- Compact 4 zone option for Console Mounting.
- Range includes a separate Water Mist Panel.
- Integrated Voyage Data Recorder output on 16 and 32 Zone Panel.
- No external secondary power source required.
- Discrimination between Automatic Fire Detectors and Manual Alarm Call points to provide the appropriate response.
- Optional Marine Approved Muster Alarm.
- Text label Inserts for Controls and Indicators in customer supplied language.

T1200 Conventional Marine Controller

Developed and Manufactured in the United Kingdom the T1200 range of Conventional Panels are a powerful yet user friendly series of Control Panels. The range is fully approved by all major Marine Authorities and takes advantage of the very latest technological advancements both in terms of design and manufacturing to the latest European, Marine and Asian standards.

Benefits

Allows very early detection of accommodation fires with significantly reduced false alarms when used with Tyco's unique heat enhanced Compensated Carbon Monoxide (CCO) Detector.

Configurable Detection Zones allowing zones to be configured for any or all of the following :- Latching or Non Latching Fire Indication Normal or Intrinsically Safe Zone Monitoring of Machinery space zones.

Crew Alert Mode :- Manages Alarm Annunciation.

Pre-configured for Immediate use.

Detection Options

Optical Detector - An excellent all round detector suited to all applications.

High Performance Optical (HPO) Detector - A direct replacement for the Ion Chamber Smoke Detector.

Flame Detector- Used where there is a risk of large flaming fires e.g. Machinery Spaces.

Enhanced Compensated Carbon Monoxide (CCO) Detector – The best detector for early warning without false alarms, used in life threatening applications e.g. Cabins, Public Spaces etc.

Heat Detector - Used where smoke detectors cannot be used e.g. Galleys, Laundries, Drying Rooms etc.

Extensive configuration options using simple on board DIL switches and links.

Fault Finding Features

- The following fault finding indications are available :-
- General Fault - Any Fault Condition.
- Power Supply Fault - Mains or standby power supply/ charger fault.
- System Fault - Micro Controller or memory fault.
- Earth Fault - Positive or Negative Power Supply Earth Fault.
- Fuse Fault - Auxiliary Supply Fuse Failure.
- Repeater Fault - Repeater Fault or Repeater communications failure.
- Sounder Fault - Any Sounder Fault.
- Fire Protection Fault - Fault on the Fire Protection Output.
- Fire Output Fault - Fault on the Fire Output.
- Fault Output Fault - Fault on the Fault Output.

Technical Specification

Dimensions: T1204 & T1216RDC – 335w x 270h x 148d mm
T1216 & T1216R – 420w x 445h x 148d mm
T1232/T1216W/T1232RAC/T1232RDC/T1200EA/T1200EDC – 500w x 535h x 174d mm
T1200B – 335w x 170h x 102d mm

Environmental

IP Rating: Designed to IP56
Operating Temp: -10°C to +55°C
Humidity: 95% RH (non condensing)

Chapter 3 - Conventional Systems

Product Codes

508.023.001	T1204DC 4 ZONE PANEL C/W 1.5A 24VDC PSU (requires T1200B battery box)	Spares	
508.023.002	T1204A1 4 ZONE PANEL C/W 1.5A 110VAC PSU (requires T1200B battery box)	509.023.001	C1626 4 ZONE PANEL MOTHERBOARD C/W AC PSU
508.023.003	T1204A2 4 ZONE PANEL C/W 1.5A 230VAC PSU (requires T1200B battery box)	509.023.002	C1626 4 ZONE PANEL MOTHERBOARD WITHOUT AC PSU
508.023.004	T1216 16 ZONE PANEL C/W VOYAGE DATA O/P MODULE & 5.0A 110/230VAC PSU	509.023.003	C1627 16 ZONE PANEL MOTHERBOARD WITHOUT AC PSU
508.023.005	T1216W 16 ZONE WATER MIST FIRE DETECTION PANEL C/W 2 X 8 WAY ZONAL RELAY OUTPUT MODULES (C1634) AND 5.0AMP 110/230VAC PSU	509.023.004	C1627 16 ZONE PANEL MOTHERBOARD WITHOUT AC PSU FOR T1232
508.023.006	T1232 32 ZONE PANEL C/W VOYAGE DATA O/P MODULE & 5.0A 110/230VAC PSU	509.023.011	C1626 REPEATER MOTHERBOARD C/W AC PSU
508.023.011	T1216RDC 16 ZONE REPEATER WITHOUT PSU	509.023.012	C1626 REPEATER MOTHERBOARD WITHOUT AC PSU
508.023.012	T1216RA1 16 ZONE REPEATER C/W 1.5A 110VAC PSU	509.023.021	C1628 4 ZONE PANEL DISPLAY
508.023.013	T1216RA2 16 ZONE REPEATER C/W 1.5A 230VAC PSU	509.023.022	C1628 16 ZONE PANEL DISPLAY
508.023.014	T1232RDC 32 ZONE REPEATER WITHOUT PSU	509.023.023	C1629 32 ZONE PANEL DISPLAY
508.023.015	T1232RA1 32 ZONE REPEATER C/W 1.5A 110VAC PSU	509.023.031	C1628 16 ZONE REPEATER DISPLAY
508.023.016	T1232RA2 32 ZONE REPEATER C/W 1.5A 230VAC PSU	509.023.032	C1629 32 ZONE REPEATER DISPLAY
508.023.021	T1200EA EXPANSION BOX C/W 5.0A 110/230VAC PSU	2605060	C1630 OUTPUT EXPANSION INTERFACE BOARD
508.023.022	T1200EDC EXPANSION BOX (NO PSU)	509.023.042	C1632 16 ZONE PANEL EXPANSION BOARD
508.023.023	T1200B BATTERY BOX FOR T1204 4 ZONE PANEL	509.023.051	PS136 5.0A 110/230VAC PSU
508.023.025	T1200 RMRS DOOR STAY KIT	509.023.052	PS40 1.5A 24VDC PSU
2605061	C1631 REPEATER INTERFACE BOARD	509.023.061	T1200 SPARE KEY SET
2605063	C1633 LED DRIVER BOARD		
2605064	C1634 RELAY OUTPUT BOARD		
2605065	C1635 MONITORED OUTPUT BOARD		
508.023.035	C1665 MUSTER INTERFACE BOARD		
508.023.036	A1466 RELAY OUTPUT BOARD		
508.023.051	T1216 ENGLISH/CHINESE/JAPANESE INSERT SET		
508.023.052	T1232 ENGLISH/CHINESE/JAPANESE INSERT SET		
508.023.053	T1216R ENGLISH/CHINESE/JAPANESE INSERT SET		
508.023.054	T1232R ENGLISH/CHINESE/JAPANESE INSERT SET		

Extinguishing Panels, Repeaters & Accessories



MZX-e Extinguishing Control Panel

The MZX-e gaseous extinguishant control panel is powerful yet user-friendly and is designed and manufactured to a high standard. The panel features approval to BS EN 12094- 1:2003, BS EN 54-2 and 4 and is designed to BS 7273 part 1. The panel has extensive configuration options but is easy to install, programme and operate. The removable chassis enables the engineer to “first fix” an empty cabinet and then fit the chassis at the commissioning stage.

This is supported by comprehensive documentation on commissioning, operating, maintenance and fault finding. In addition there is a comprehensive range of compatible accessories available to meet most customer requirements.

Operation

Three fully-monitored detection zones are provided. Zones 1 and 2 normally provide first stage and second stage fire conditions to allow extinguishant discharge (coincidence detection zones). Zone 3 is an auxiliary zone for detection only purposes. Zone 4 is used as a manual release zone.

Facilities

Three fully-monitored alarm circuits are provided, each rated at 0.5A with various configuration options via the engineers DIL switch settings. Two circuits are designed to provide audible warning of any fire condition and one circuit to provide an individually distinct audible warning of the pre-discharge, discharged and emergency hold condition.

Two fully-monitored actuator/solenoid circuits, each rated at 1A, operate simultaneously upon “extinguishant release”.

An RS485 multi-drop circuit link supports up to 7 Status Controller/Indicators of any type mixed on the communication path. Additional terminals and configuration options allows the engineer to configure the manual release, abort and hold switches to either data comms or hard wired inputs as required.

Features

- Approval to BS EN 12094-1:2003 additional options
- Approval to BS EN 54-2 and 4
- Designed to BS7273-1:2000
- Comprehensive facilities for gaseous extinguishing systems
- Monitored inputs for gas discharged, gas low, isolation valve closed/abnormal, gas trapped in manifold
- Control inputs for auto/manual, gas hold, gas abort
- 1 minute actuator cut off option
- Monitored actuator/solenoid release
- Extensive disablement options
- Common fire, fault, relay / monitored output facilities
- 1st, 2nd, 3rd stage and gas discharged relay / monitored output facilities
- Reset relay facilities

Normally-open inputs provide for remote evacuate, silence alarms, system reset, lock-off input, low pressure and gas discharged pressure switch input.

Outputs are provided for first stage signalling, second stage signalling, system discharged, common fire and common fault . These outputs may be configured as either Volt-Free C/O contacts or monitored 24V (50mA) outputs. A system reset Volt-Free relay is also provided.

Configuration

The use of DIL switches on the internal motherboard enables the engineer to easily configure the extensive options available and view the panel’s configuration upon any return visit.

Additional Benefits

- Intrinsically safe barrier settings
- Metron or solenoid compatible
- Single or double knock operation
- Pre-discharge delay adjustable from 0 to 60 seconds
- Discharged indication with or without pressure switch
- Inhibit silence alarms until gas discharged
- Latching or non latching fault indication option
- Option for rapid buzzer pulse when gas discharge is imminent
- One man zone and sounder test
- Easily removable chassis

Product Codes

- 508.033.050.EA MZX-e Extinguishing Control Panel English / Arabic
- 508.033.002.EA MZX-e SLU1 Status Lamp Unit, Indication only English / Arabic
- 508.033.003.EA MZX-e SLU2 Status Lamp Unit, Indication, Auto/Manual Select and Manual Release English / Arabic
- 508.033.004.EA MZX-e SLU3 Full Function Status Lamp Unit, Indication, Auto/Manual Select, Manual Release, Hold, Abort & Time Counter English / Arabic
- 508.033.005.EA MZX-e SLU4 Weatherproof Status Lamp Unit, Indication and Auto/Manual Select English / Arabic

Chapter 3 - Conventional Systems

Extinguishing Door Interlock Ancillaries & T500 Series Spares

A microswitch lock keep can be used with a deadlock to provide a signal to the panel to ensure that the extinguishing system is only put into Automatic mode when the door is locked shut.

Product Codes

527.001.028
Micro-switch Lock Keep & Back-plate For Deadlock
599.001.012
Lamp 28V 60mA Used On T525

T561 Electrical Manual Release Unit



A stand alone manual extinguishant release unit with selectable activation and end of line resistors making the T561 compatible with MXCE, Prescient, System 1700 and NTR Extinguishing Panels.

Product Code

509.030.117
T561 Extinguishing Release Manual Callpoint.

Weatherproof Extinguishing Indicator Units



E1 Single Red lamp unit
Single 24V d.c. red lamp labelled 'Extinguishing System Operated'

Product Codes

540.007.001
E1 Single Red lamp unit
Heavy Duty IP67 Cast Aluminium Surface Mount Lamp Unit
599.001.029
Spare bulb for E1/E3 24V-5W

	Technical Specification Dimensions:		
	H(mm)	W(mm)	D(mm)
E1	100	100	115
E3	300	100	115



E3 Red/Amber/Green lamp unit
Heavy Duty IP67 Cast Aluminium Surface Mount Lamp Unit Three 24Vdc lamps:
Red labelled 'Extinguishing System Operated'

Amber labelled 'Extinguishing System Automatic Control'
Green labelled 'Extinguishing System Manual Control'

Product Codes

540.007.002
E3 Red/Amber/Green lamp unit
599.001.029
Spare Bulb for E1/E3 24V-5W

DDA Compliant Pager



Fire Tek Pro Paging System

The FireTek Pro paging system is designed for use with professional Fire Systems installed in commercial, industrial and educational premises. The system is primarily designed to alert the "hearing impaired" in the event of a fire or other emergency where an audible sounder is the normal means of indication.

The FireTek Pro has been designed to comply with the recommendations detailed in BS5839-1: 2002 for alerting the "hearing impaired" to the activation of a fire alarm system.

The system can also be used in conjunction with a security panel to alert guards who might be located remotely from the main premises.

The interface to the fire panel comprises of three Prioritised Fire Inputs and two Fault Inputs. For ease of installation, a monitored cable assembly is provided with each system which includes a "common fault" relay output back to the host fire panel. This output will activate if the FireTek Pro suffers a mains failure, transmitter fault, antenna mismatch, interface link failure, or low battery state.

Upon activation of any one of the Fire Inputs, the FireTek Pro will enter the fire alert condition, prioritising and transmitting the Fire message to all enrolled pagers. The transmissions will be repeated until the fire condition is reset. The FireTek Pro Pagers ensure that users are alerted by distinct vibration patterns and clear text messages.

UHF Radio Operation

Any alerting system is only as good as its weakest link. The FireTek Pro utilises UHF radio frequencies, the main benefits being superior in-building radio signal propagation and the option of a manual frequency co-ordinate license issued by OFCOM. Licensing the FireTek Pro provides a higher degree of protection from interference. This fact is acknowledged in Section 18.1 of BS 5839-1:2002.

Features

- UHF radio link for maximum licensable protection
- Unique coding avoids neighbouring system clashes
- Self monitoring of system health
- Rugged steel enclosure to IP65
- Backlit 2 line text display continuously reports system status
- Additional audible & visible status indicators
- Prioritised Fire Alarm Inputs
- Automated test calls alert pagers to loss of radio signal
- Fault Notification to the lost fire panel via a monitored link
- Key operated "System Test" facility for routine confidence checking
- Over 90 hour's backup operation with internal battery
- Achieves Disability Discrimination Act (DDA) compliance

High Integrity Pagers

To complete the system the alphanumeric pagers have added features specifically incorporated for the "hard of hearing" when used with the FireTek Pro. These features include distinct vibrate alerts for emergency messages, a vibrating out of range indicator which displays "No Service" on the pager when the radio link is lost, and a vibrating low battery indicator.

Antenna Options

Mini Dipole Antenna - remote internally mounted antenna for large sites or areas of difficult signal propagation.

Folded Dipole Antenna - remote externally mounted antenna for maximum signal coverage e.g. campuses and multi-building sites.

Chapter 3 - Conventional Systems

Technical Specifications

Supply Voltage:	230V AC 50-60 Hz 12v 7Ah standby battery
Operational Current:	250mA
Inputs:	3 Prioritised Volt Free (Fire) Input 1 - Fire Alarm - Evacuate Building Input 2 - There is an Incident - Leave Building Input 3 - Prepare to Evacuate - Await Instructions 2 Volt Free (Fault)
Outputs:	1 off volt free relay output
Fault Notification:	Mains Failure Transmitter Fault Antenna Mismatch Panel Link Failure Low/Missing Battery
Visual Display:	2 Line Backlit LCD
Enclosure:	Steel Enclosure rated to IP65
Dimensions:	380 x 320 x 110 mm (H x W x D) (No antenna fitted)

Product Codes

557.200.071	Paging Transmitter
557.200.074	40 Character Alpha Numeric Pager
557.200.076	1/2 wave dipole antenna
557.200.077	Wall mounting folded dipole antenna
557.200.078	Pole mounting folded dipole antenna
557.200.079	5 metre antenna feeder cable
557.200.080	10 metre antenna feeder cable

Point Detectors



Features

- Unique early detection enhanced CO fire detector
- Intelligent Universal HPO Smoke Detector
- Low profile, discreet and unobtrusive
- Superior performance and reliability
- Designed for fast, easy installation
- Integral and remote alarm LED
- Series of Product Approvals

Through innovative design the Series 600 detectors have reduced the installation and servicing time to a minimum, needing only one visit to complete the installation and having a park position for the detector to ease the servicing.

The Series 600 includes the unique enhanced Carbon Monoxide CO fire detector, which provides a general purpose fire detector with unprecedented early detection capability and excellent false alarm immunity. The CO fire detectors are the first choice for sleeping risks.

Also included within the range is the intelligent high performance optical smoke (HPO) detector. The use of the patented optical sensing chamber, together with refined signal processing, has enabled the introduction of a smoke detector suitable for fast, reliable smoke detection of both slow and fast developing fires.

The HPO can be seen as a truly universal smoke detector, suitable for most applications.

Approvals:-



High Performance Optical Smoke



These detectors react to the whole range of fire products from slow smouldering fires, producing visible particles to open flaming fires producing large numbers of very hot smaller sized aerosols. It combines optical and heat detector technology to detect clear burning fire products which hitherto could only be easily detected by ion-chamber detectors. For normal ambient conditions, the high performance optical detector behaves as a normal optical detector. Only when a rapid rise in temperature is detected does the sensitivity of the

detector increase and the presence of smoke will confirm a fire condition. The HPO will not operate on a rate of rise of temperature alone.

Datasheet - Product Code PSF123 Manual - Vol01C-02-D2 "Detectors Fire Manual"

Product Codes

516.600.002.A		
Approval	Branded	Model
LPCB	ADT	601PH
516.600.002.T		
Approval	Branded	Model
LPCB	Thorn	601PH
516.600.002.Y		
Approval	Branded	Model
LPCB	Tyco	601PH
516.600.202		
Approval	Branded	Model
Marine	Tyco	601PH-M

Enhanced Carbon Monoxide Fire



The CO fire detector is a unique general purpose fire detector which provides very early warning of slow smouldering fires. Ideal for sleeping risks the CO fire detector is also well suited to many applications where heat detection is insufficient but smoke detection causes false alarms. As CO travels more freely than smoke the position of CO fire detectors is more flexible.

This feature is particularly useful in large complex structures such as atria and warehouses, where position of smoke detectors is difficult.

Datasheet - Product Code PSF123 Manual - Vol01C-02-D3 "Detectors Fire Manual"

Product Codes

516.600.004.A		
Approval	Branded	Model
LPCB	ADT	601CH
516.600.004.T		
Approval	Branded	Model
LPCB	Thorn	601CH
516.600.004.Y		
Approval	Branded	Model
LPCB	Tyco	601CH
516.600.204		
Approval	Branded	Model
Marine	Tyco	601CH-M

Optical Smoke



These detectors are capable of detecting the visible smoke produced by materials which smoulder or burn slowly, i.e. soft furnishings, plastic foam etc.; or 'smoke' produced by overheated but unburnt PVC. These detectors are particularly suitable for general applications and areas where cable overheating may occur e.g. electrical services areas. The novel design of the asymmetrical sampling chamber and signal processing techniques stop unwanted alarms caused by very small insects. i.e.

thrips. Smoke entering the sampling chamber scatters the infra-red light pulses onto a photo-diode. These pulses are converted to an electrical signal which is compared against a preset alarm level.

Datasheet - Product Code PSF123 Manual - Vol01C-02-D6 "Detectors Fire Manual"

Product Codes

516.600.001.A		
Approval	Branded	Model
LPCB	ADT	601P
516.600.001.T		
Approval	Branded	Model
LPCB	Thorn	601P
516.600.001.Y		
Approval	Branded	Model
LPCB	Tyco	601P
516.600.201		
Approval	Branded	Model
Marine	Tyco	601P-M

Heat



These detectors use two networked thermistors in a bridge configuration to provide a fast response, that depends both on absolute temperature and notes the change of temperature. The rate of rise/fixed temperature heat detectors can be used in areas where smoke sensors are unsuitable due to environmental conditions (smoke, dust etc.). Such areas include kitchens, locker rooms, canteens, garages, loading bays etc.

Rate of Rise

Product Codes		
516.600.003.A		
Approval	Branded	Model
LPCB	ADT	601H-R
516.600.003.T		
Approval	Branded	Model
LPCB	Thorn	601H-R
516.600.003.Y		
Approval	Branded	Model
LPCB	Tyco	601H-R
516.600.203		
Approval	Branded	Model
Marine	Tyco	601H-R-M

Fixed Temperature 60°C

Product Code	
516.600.214	
Approval	Model
LPCB /Marine	611H-F

Fixed Temperature 90°C

Product Code	
516.600.033	
Approval	Model
LPCB/Marine	631H-F

Datasheet - Product Code PSF123 Manual - Vol01C-02-D5 "Detectors Fire Manual"

Ion Chamber Smoke



These detectors react to the visible and invisible fire aerosols (products of combustion) and are therefore capable of detecting the early presence of hot smouldering and flaming fires, such as wood, paper etc.

They are particularly suitable for general applications in all areas and use a dual ionisation chamber in which the air is ionised by a single radioactive source (33k Bq Americium 241). The presence of smoke in the sampling chamber causes a change in the balance voltage, between the two chambers.

This is then compared against an alarm level.

Datasheet - Product Code PSF123 Manual - Vol01C-02-D4 "Detectors Fire Manual"

Product Codes

516.600.005.A		
Approval	Branded	Model
LPCB	ADT	601I
516.600.005.T		
Approval	Branded	Model
LPCB	Thorn	601I
516.600.005.Y		
Approval	Branded	Model
LPCB	Tyco	601I

Solar Blind Infra Red Flame Detector



Flame detectors, unlike smoke and heat detectors, do not rely on convection to transport the fire product to the detector, nor do they rely on a ceiling to trap the products. They can therefore, be used to protect large open areas without sacrificing speed of response to flaming fires. In order to ensure full coverage, however, flame detectors do require direct line of sight to all parts of the protected area.

Infra-red flame detectors such as the 601F are designed to respond

rapidly to fires which involve clean-burning fuels such as alcohol or methane, ie fires which would not be detected by smoke detectors. The 601F Flame detector, by virtue of it's operating wavelength and flicker discrimination, is insensitive to normal environmental influences. For outdoor use, a solar-blind detector (e.g. the S200Plus) should be used. The 601F flame detector should, normally, only be used inside buildings to supplement heat and smoke detectors.

Product Codes


516.600.006		
601F		
516.600.007		
601F-M Marine		

Datasheet - Product Code PSF132 Manual - Vol01C-02-D9 "Detectors Fire Manual"


Chapter 3 - Conventional Systems

Series 600 Detector Specifications

Dimensions of Smoke/Heat/Co Detector

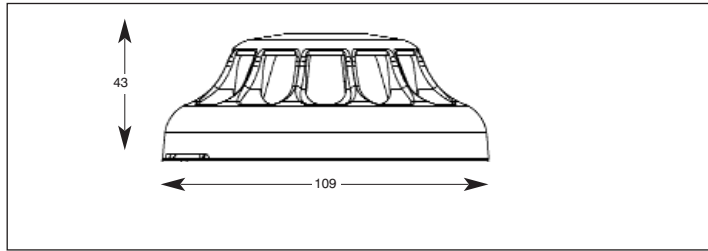

Dimensions of Flame Detector

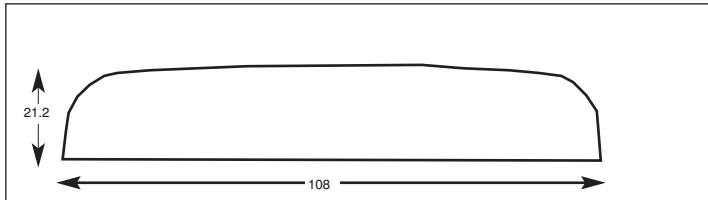

Technical Specification - Series 600					
	601	601PH/P/601PH-M/601P-M	601H-R/611H-F/601H-R-M/631H-F	601CH/601CH-M	601F/601F-M
Weight	100g	93g	80g	90g	74g
Material	FR 110 Bayblend				
Operating Temp.	-20 to +70°C	-20 to +70°C	-20 to +70°C*	-10 to +55°C	-20 to +70°C
Storage Temp.	-40 to +80°C	-25 to +80°C	-25 to +80°C	-20 to +55°C	-40 to + 80°C
Relative Humidity	95/98% Non-Condensing				
Quiescent Current(typ)	62µA	65µA	61/65µA	87µA	300µA
Alarm Current(typ)	54mA	45mA	53mA	53mA	42mA
Operating Voltage	10.5 - 33 Vdc	10.5 - 33 Vdc	10.5 - 33 Vdc	10.5 - 33 Vdc	18-28Vdc
*Short Term (<3min) -40 to +120°C					



Features

- Sealed Stainless Steel Construction
- Suitable for use in hazardous areas

T54B - Point Type Heat Detector

Constructed from stainless steel, the T54B is an extremely rugged heat detector that can be used to detect fires in the harshest of environments. The T54B can be used in environments with ambient temperatures up to 200°C and, being hermetically sealed is impervious to most contaminants.

Classified as a simple device, the T54B can be used in Zone 0 areas when connected to a suitable intrinsically safe barrier.

For reliable operation, it is recommended that T54B detectors have set points 20°C or 20% (whichever is higher) above the maximum temperature they will be exposed to in normal operation.

Preferred factory preset temperatures are: 60, 90, 100, 145°C; normally with open contacts.

Technical Specification

Operating voltage @ 0.5A:	240Va.c. to 24Vdc
Switching Current:	5 to 500mA
Contact Resistance:	<1 ohm
Actuating Temp: (factory set)	60 to 240°C
Fixed Temp. only:	Type E
Accuracy:	+ or - 5%
Ambient Temp.:	-40 to +270°C
Relative Humidity:	100% RH
Protection Category:	IP67
Thread Size:	M20 x 1.5mm

Product Codes

516.033.011	T4E60X T54B Point Type heat detector - 60°C
516.033.012	T4E90X T54B Point Type heat detector - 90°C
516.033.013	T4E100X T54B Point Type heat detector - 100°C
516.033.014	T4E145X T54B Point Type heat detector - 145°C

Other temperatures and normally closed contacts are available by request.

Beam Detectors



Features

- Motorised Auto-Aligning
- Up to 4 Detectors per System Controller
- Each Detector configurable from 8m to 100m
- Integral LASER
- Auto-Align Fast Automatic BeamAlignment
- Auto-Optimise Building Movement and Contamination Compensation
- Low Level System Controller
- 20mm Cable Gland Knockouts on System Controller
- 2-wire interface from System Controller to Detector
- Worldwide Approvals including EN54:12 and UL268
- Up to 4 Detectors per System Controller

FIRERAY 5000 Multi Head Auto Aligning Infrared Optical Beam Smoke Detector

The FIRERAY® 5000 motorised, auto aligning infrared optical beam smoke detector can now be installed with up to four detector heads per system, thus saving on installation time and costs. This innovative system has been designed from the ground up to include pioneering technology that fully addresses the needs of the installer and user, both now and in the future.

With its industry leading optics, the FIRERAY 5000 is ideally suited for the protection of large areas where the use of traditional detection technologies would prove to be too difficult and/or costly to install. The FIRERAY 5000 combines an infrared transmitter and receiver in the same discrete unit and operates by projecting a well-defined beam to a reflective prism, which returns the beam to the receiver for analysis. Smoke in the beam path causes a drop in power, which, if below a pre-determined level, results in an alarm signal.

Getting the system operational is simplified by a number of groundbreaking features that combine to make the FIRERAY 5000 the quickest and easiest detector of its type to install. Once the detector heads are connected, using the Easifit First Fix system, an integral LASER, which is aligned along the optical path of the beam, can be activated. This allows the reflective prism to be sighted quickly and with confidence. Once the LASER has been used to coarsely align the beam, the AutoOptimise beam alignment system takes over and automatically steers the beam into the optimum position.

The system can be fully customised, according to local conditions; both alarm thresholds (sensitivity) and time to Alarm/Fault can be set from the ground level System Controller.

Each detector head is independently configurable from 8m through to 100m and has its own individual fire threshold. The System Controller retains one set of Fire and Fault relays that is common to all detectors that are installed.

The FR5000 MultiHead is supplied with one detector head and reflector for single beam operation from 8 to 50 meters. Up to 3 additional detector heads can be added to the controller to enable larger or more complex areas to be protected (Subject to local codes and standards)

Technical Specification

Controller:	202w x 230h x 81d mm 0.9 Kg
Detector:	134w x 135h x 134d mm - 0.5 Kg
Additional detector head	2mA @ 24VDC
Operating Current	
(low power mode):	10mA @ 24VDC
Operating Voltage:	14 to 28VDC
IP Rating:	IP54
Operating Temperature:	-20 to +55°C
Humidity:	93% RH (non condensing) max

Product Codes

516.015.020	FireRay 5000 System (50m)
516.015.021	FR 5000 Detector Head (50m)
516.015.007	FireRay Reflector 100 X 100mm
	4 reflectors are required for distances from 50 to 100m



Features

- Range 5 metres up to 100 metres
- Area coverage up to 1400m²
- Selectable sensitivity
- Self-check and automatic compensation
- Manual or automatic reset
- Suitable for both conventional and addressable fire systems
- Low current consumption
- Flexible system design options
- Robust metal construction
- Designed to conform to BS5839 Part 5

Optical Beam Smoke Detectors

The FIRE-RAY 2000 is an active infra-red smoke detector. The system comprises of three base elements i.e. a transmitter, receiver and Control Unit.

Analysis of the modulated infra-red beam by the Control Unit determines whether smoke is present, and if so generates an alarm signal.

Technical Specification

Technical Specification	Dimensions(mm)			Weight (Kg)
	Height	Width	Depth	
Transmitter/Receiver	95	75	115	0.4
Control Unit	260	210	80	2.25

Voltage Range-	Fireray 2000	+11.5 to +28Vdc
Fireray 2000 Quiescent Current		<13mA
Fireray 2000 Alarm Current		<20mA

Operating Temp. Range -	Fireray	-10°C to +55°C
Humidity		up to 95% RH (Non-condensing)
Fireray 2000 Enclosure		IP54

Product Codes


- 516.015.006.A FireRay2000 optical beam smoke detector VdS approved, ADT Branded
- 516.015.006.T FireRay2000 optical beam smoke detector VdS approved, Thorn Branded
- 920450 FireRay2000 -UL Optical beam smoke detector - UL approved
- 516.015.007 FireRay2000 Retro-Reflector 100 x100mm
- 516.015.008 FireRay2000 Alignment tool

FireRay Optical Beam Smoke Detector Mounting Accessories

There are a range of mounting accessories available for use with FireRay® Optical Beam Smoke Detectors. These accessories will help reduce installation times and provide a professional mounting solution when faced with challenging building internals.



The Universal Mounting bracket can be used with the Fireray 5000 detector head and the 1 or 4 way prism plates to enable the detector head or prism plates to be easily mounted and adjusted when fixing to angled walls or cladding



The Flat Mounting plate is a metal plate which will support a single prism or 4 prisms, the side mounting holes are compatible with Unistrut® racking systems.



The large prism plate will securely mount 4 prisms and is designed to be used in conjunction with the Universal Mounting Bracket (not included)



The small prism plate will securely mount a single prism and is designed to be used in conjunction with the Universal Mounting Bracket (not included)

Product Codes

- 5000-005 Universal Mounting Bracket
- 5000-006 Flat Mounting Plate for 1 to 4 Prisms
- 5000-007 Prism Mounting Plate for 4 Prisms
- 5000-008 Prism Mounting Plate for 1 Prism

Linear Heat Detectors



Features

- Easy and cost effective installation
- Good sensitivity with adjustable alarm threshold
- Open and short circuit monitoring
- Suited for outdoor and indoor applications
- Can be used in hazardous areas
- Mechanical protection is provided for cables in areas where damage may occur
- Chemical resistance sheathing is available for areas where petro-chemical corrosion may occur.

Linear Heat Detection

The LD40 linear heat detection system is used to monitor fire (or overheat) conditions in confined or polluted areas or where there are adverse or unusually variable environmental conditions.


The sensor cable is unaffected by dust, moisture or vibration and requires little maintenance.

Technical Specification

Dimensions:	178H x 130W x 75D mm
Weight:	0.55Kg
Operating Temp:	-25°C to +70°C
Relative humidity:	Up to 98% RH non-condensing
Rating:	IP55
Operating Voltage:	+8 to +30Vdc
Quiescent Current:	60-80µA

Product Codes

516.016.005	LD40 High resistance sensor cable blue - 200M reel
516.016.006	LD40 High resistance sensor cable black - 200M reel (Nylon sheath suitable for petrochemical exposure)
516.016.010	LD40 EOL Termination kit (PK10)
516.016.011	LD40 In-line Jointing kit
516.016.012	LD40 Analyser module with conventional detection zone interface.
516.016.201	B6782-003 EDGE CLIP 2-3mm WEB
516.016.202	B6782-024 EDGE CLIP 3-8mm WEB
516.016.203	B6782-025 EDGE CLIP 8-13mm WEB
516.016.204	B6782-026 EDGE CLIP 14-20mm WEB
516.016.205	B6782-004 'T' CLIP
516.016.206	B6782-005 PIPE CLIP
516.016.207	B6782-023 'V' CLIP
516.016.208	B6782-008 NEOPRENE SLEEVE
516.016.209	B6782-151 THERMAL SPACER
516.016.210	B6782-152 THERMAL SPACER



Ceiling Clip



Edge Clip



Pipe Clip



Thermal Spacer



V Clip

Detector Bases and Accessories



Features

- Optional relay bases
- Remote indication LEDs
- Optional conduit entry backboxes
- Protective wire cages

Detector Bases and Ancillaries

The 600 Series range of low profile detectors provide a comprehensive range of highly effective and aesthetically pleasing smoke and heat detectors with worldwide approvals.

The unique design and leading edge technology of the detectors go beyond the detection technology itself. The range of detector bases is designed to make low profile detector installations cost effective, aesthetically pleasing and easy to install and maintain – thus minimising disruption.

The detector bases include standard universal bases, which have no integral electronics, thus making them low cost and low maintenance. Alternatively, a range of functional bases incorporate sounders and relays to provide a cost effective method of adding functions and flexibility to the fire detection installation.

Chapter 3 - Conventional Systems

The standard universal detector bases are compatible with the Series 600 low profile detectors. The standard bases have no electronics and even when the detectors are connected to the bases, they can be electrically disconnected and left in a 'park' position. This enables wiring integrity tests to take place without any damage to electronics. An optional, tool removable locking pin allows the detector to be fixed in place to prevent tampering.

5B-5 Inch Universal Detector Base



This is the most commonly used base. It is fully EN54 approved for use with the Series 600 conventional range of detectors.

If used it will require a separately supplied tool to remove a detector from the base.

Features

- Drives a remote indicator
- Detector locking pin with every base
- Temporary Park position
- Fits directly to a British or European conduit box or directly onto the ceiling.
- Break-outs for surface installation

Product Code

517.050.017

5B 5" Universal Base LPCB

5BD-5 Inch Conventional Diode Continuity Base



The 5BD Continuity Base is a standard 5 inch base fitted with a continuity diode, for use with all Series 600 detectors. The base is designed to ensure that conventional systems meet the requirements of BS5839 Pt:1 for callpoints placed after detectors.

Features

- Compatible with Series 600 Low Profile Detector Range
- Designed for two wire operation
- Facility to drive a remote indicator
- A breakout locking key is provided as an integral part of each base, which can be fitted to lock the detector into position.
- A temporary park position is provided so that the field wiring can be tested with the detector in situ.
- Maybe fitted directly to a British or European conduit box or directly onto the ceiling

Product Code

517.050.600

5 BD 5" Conventional Diode Continuity Base LPCB





Chapter 3 - Conventional Systems

Functional Detector Bases

Functional detector bases use a common moulding which incorporates a double sided circuit board which enables electrical connections to be made on the top and bottom of the functional base. This allows the functional bases to be retrofitted into new and existing universal bases or alternatively the depth and cost of the installed detector can be reduced by using the functional base instead of the universal base.

This feature enables additional sounders to be easily added during commissioning. In addition, changes to the building during it's life can be easily adapted to, by retrofitting sounders and relay outputs to existing detection points. When functional bases are fitted to universal bases, they automatically lock into position. Removal is then achieved using the detector removal tool. This feature ensures that the detector and functional bases are removed separately.

Manual - Vol/01B-09-D1/01B-07-D1 "Detectors Fire Manual"

Tyco MKII Sounder Base		
	<p>A new low current range of sounder bases for use with Conventional Fire Alarm Control Panels.</p>	<p>Product Codes 577.001.035 601SB Conventional Sounder Base 577.001.037 601SBD Conventional Diode Sounder Base 577.001.036 602SB 2 Wire Line Powered Sounder Base 577.001.038 602SBD 2 Wire Line Powered Diode Sounder Base 517.050.022 Volume Pot Spare Cover (1 sheet of 144)</p> <p>517.050.005 4" Detector Base Locking Pin Kit (PK100)</p>
	<p>Features</p> <ul style="list-style-type: none"> • Manufactured to EN54 part 3 • Integral sounder and detector base • Volume and tone adjustable after installation • Low Power Synchronisation • Do not require use of a standard base (maybe installed directly onto a standard besa box) 	
Tyco MKII Sounder Cap		
	<p>A plastic cap which fits onto the 601SB/601SBD/602SB/602SBD Sounder Base to enable these bases to operate as a sounder without fitting a detector.</p>	<p>Product Codes 557.001.040.A Mark II Sounder Cap (ADT Branded) 557.001.040.Y Mark II Sounder Cap (Tyco Branded)</p>
MC600 Functional Relay Base		
	<p>The 600 Series relay base provides dual relay contacts for signalling external devices on conventional detection systems. Very low operating current even when the relay is energised, enable the relay base to be used without additional power. The relay contacts operate when the detector enters the alarm condition.</p>	<p>Product Code 568.001.018 MC600 Relay base (BS5839)</p> <p>Vibration: Exceeds requirements of EN54-3, Marine & UL268</p>
	<p>Features</p> <ul style="list-style-type: none"> • Dual pole 24Vdc relay contact (60VA) • Status indicator LED 	<p>Technical Specification Operating Temp.: -25°C to +70°C Humidity: Up to 95% RH (non-condensing)</p>
Volume Adjustment Tool		
	<p>A simple Volume Adjustment Tool, specific to the task of sounder volume selection on the "variable-volume" range of Tyco MKII Sounder Bases.</p>	<p>Sounder volume can be easily varied between the maximum 90dBA and minimum 68dBA volume settings, using this simple, functional tool.</p> <p>Product Code 517.050.015 Volume Adjustment Tool</p> <p><i>Note: Sounder Bases are supplied with the volume pre-set to maximum volume.</i></p>

Chapter 3 - Conventional Systems

Remote Indication LED



All detector bases have the ability to drive a remote LED in the event that the installed position of the detector is not easily visible.

Features

- UK Single gang mounting
- High intensity red LED

Product Code

540.003.006
Remote LED

EM-5B Euro Mounting



The euro-mounting base provides a matching back box, which allows the standard MUB to be ceiling mounted with conduit entries for standard 18 and 21mm conduit.

Features

- 2 x 18mm conduit entries
- 2 x 21mm conduit entries
- Fits all 5" Bases
- Fitted with terminal, if more are required use optional accessory kit

Product Codes

517.050.604
EM5B mounting base
517.050.612
Base accessory terminal kit
(pack of 10)

DHM-5B - Deck Head Mounting



Where the detectors are mounted in humid and environmentally challenging situations such as marine or offshore installations, the DHM 5B deck head mount provides a sealed waterproof mounting which protects the electrical connections in the base. Can be screwed, bolted or welded to the deckhead. Supplied

with 1 terminal. If more are required, use the optional base accessory kit.

Features

- 4 x 20mm gland entries
- Fits ALL 5" bases
- IP55 with supplied gasket

Product Codes

517.050.603
Deckhead mounting
517.050.612
Base accessory terminal kit
(pack of 10)

Protective Detector Cage



Robust steel protective cage for Series 600 detectors using the 5" base. Ideal for schools and sporthalls or whenever detectors need protection.

Strong coated steel construction with 4 point fitting.

Product Code

517.050.614
CW-5B Detector Cage

Protective Detector/Sounder Base Cage




White powder coated steel protective cage for Series 600 Detectors fitted with a sounder base. Internal dimensions: 120mm dia x 80mm deep.

Product Code

517.050.011
Steel Protective Detector Cage

Duct Probes

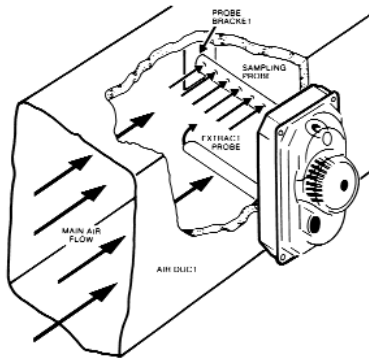

Warning

Duct probe units sited in the common duct work to several extract grills may fail to respond to smoke from any one extract due to the effect of dilution. The SMP units will not respond to airflow of less than 1.5m/sec.

Technical Specification

Operating temperature: -20°C to +70°C
 Storage temperature: -25°C to +80°C
 Relative Humidity: 0 to 95%
 SMP69 Stainless steel 316 housing with transparent polycarbonate cover

SMP Duct Probe Units

Where smoke within duct work needs to be detected these duct probe units provide an economical solution, for use with series 600 detectors.

The SMP Duct Probe Units are designed to be installed in air conditioning supply and exhaust ducts for the purpose of monitoring the airflow for smoke and combustion products.

The SMP69 probe units are designed to accept and operate with series 600 detectors. For general applications it is recommended that photoelectric smoke detectors rather than ionisation smoke detectors are used.

The SMP stainless steel probe unit is designed to withstand the more demanding environments of the offshore oil and gas industries.

The units are designed to operate in airspeeds of 1.5 to 25 metres per second. A range of sampling tubes from 525mm to 1575mm are available.

SMP69	
Height	90mm
Width	150mm
Length	225mm
Weight	1.2Kg

SMP69 Duct Probe Air Sampling - Stainless Steel



Product Codes

517.025.035

SMP69 Stainless Steel Duct Probe unit and universal detector base for Series 600/800 Detectors.

517.025.028

DPS450 Probe tube stainless steel 450mm and exhaust

517.025.029

DPS600 Probe tube stainless steel 600mm and exhaust

517.025.030

DPS750 Probe tube stainless steel 750mm and exhaust

517.025.031

DPS900 Probe tube stainless steel 900mm and exhaust

517.025.032

DPS 1200 Probe tube stainless steel 1200mm and exhaust

517.025.033

DPS1500 Probe tube stainless steel 1500mm and exhaust

[Datasheet - Product Code PSF092 "SMP69 Duct Probe Unit"](#)

[Manual - Vol01B-06-D1 "Detectors Fire Manual"](#)



DPK4 Duct Probe

The DPK4 duct probe unit have been developed to detect smoke in ventilation ducts. They offer significant benefits in terms of performance and installation. The system comprises a single duct probe tube and housing specially designed for optimum airflow through the smoke detector and suitable for use in incoming, outgoing and circulation air ducts of ventilation and conditioning systems.

The duct probes can operate across a wide range of airflow speeds and are especially recommended for installations in ducts with air flow velocities between 1 m/s and 20 m/s.

Unlike more traditional duct probe units that employ an inlet and exhaust tube with sampling holes, the DPK4 unit uses a highly efficient single sampling tube that is slotted along its length. This allows the sampling tubes to be cut to the desired length whilst maintaining maximum efficiency.

Features

- Built-in MZX Detector base
DPK4 - with built-in MZX detector base 5" - 5B
- DPK4 is suitable for conventional systems
- Suitable for air velocities from 1 m/s to 20 m/s
- Can be used in combination with a wide range of optical smoke detectors e.g. 601P or 601PH
- One-pipe air sampling system simplifies installation
- Range of aluminium probe tubes are available for ducts up to 2700 mm
- Transparent lid allows detector to be seen
- Test hole on cover
- Sensitive flow indicator
- Simple service and maintenance
- Installer friendly connection of cables
- Easy installation of duct probe tubes

The transparent cover gives clear visibility of the detector, its LED indication and airflow indicator. A red plastic flag is fixed inside the housing providing a simple but effective confirmation that there is no leakage and that the air flow from the air duct is in fact passing through the housing.

In order to reduce the time required to test the duct probe detector during routine maintenance, an aperture is provided that allows aerosol test gas to be directed at the detector without having to dismantle the unit.

Accessories


Tyco Safety Products offer 3 lengths of the duct probe tubes. The tube is made of aluminium and can easily be shortened to suit the span of the air duct. Where the unit is mounted on insulated or circular air ducts, the DPKM mounting bracket is required.

Product Codes

517.025.049	DPK4 - Duct Probe with MZX detector base 5" - 5B
517.025.051	DPK600 - Duct Probe Tube 600 mm
517.025.052	DPK1500 - Duct Probe Tube 1500 mm
517.025.053	DPK2800 - Duct Probe Tube 2800 mm
517.025.054	DPKM - Duct Probe Mounting Bracket
517.025.055	Spare Filters for DPK4/DPK4I (Pk 10)

Detector supplied separately

Callpoints

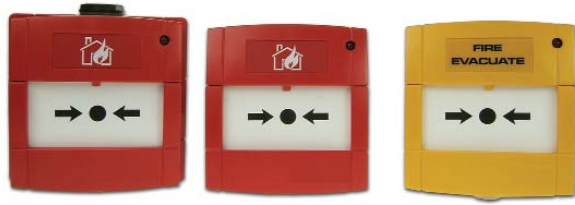

Features

- Integral LED indicator for easy identification of operation
- Surface or flush mounting
- Extensive range of conventional callpoints
- Test key facility, speeds maintenance visits
- Optional transparent hinged cover
- Hazardous areas models available (See Special Hazards Section)
- IP67 Waterproof models for external applications

MCP Series Callpoints

A comprehensive range of callpoints for use with conventional systems. All the callpoints are designed to enable an alarm signal to be given by breaking a glass element.

This operates a switch and is indicated by an LED indicator. If required, an optional transparent hinged cover may be installed to guard against accidental operation.

Technical Specification

(Indoor & Outdoor)

Housing:	PC/ABS
Operating Temp.:	
Outdoor	-30°C TO +70°C
Indoor	-10°C TO +55°C
Relative Humidity:	up to 95% RH (non-condensing)


Commonly Used Callpoints

Model	Colour	Type	IP Rating	R4/R1 Ohms
MCP200	Red	Conventional Alert	24D	120/470
MCP210	Red	Conventional Evacuate	24D	47/39
MCP230	Red	Conventional Alert	67	120/470
MCP270	Yellow	Conventional Evacuate	24D	47/39
Keyswitch	White	Conventional	24D	Not Applicable

Indoor & Outdoor MCP Callpoint


Indoor Callpoint

Weight: 110g



Outdoor Callpoint

Weight: 240g

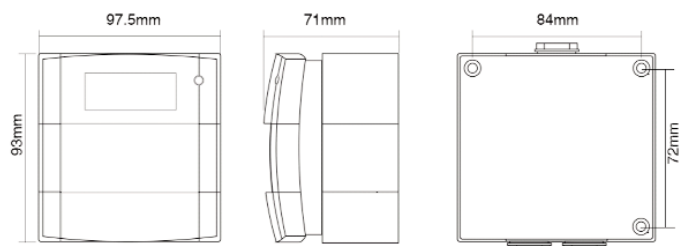

Chapter 3 - Conventional Systems

Conventional MCP200 Callpoint



The MCP200 is a red indoor callpoint with 'alert' resistors and LED indicator. The MCP200 is LPCB approved.

Product Codes

514.001.142.A
MCP200 without backbox-ADT branded
514.001.142.T
MCP200 without backbox - Thorn branded
514.001.142.Y
MCP200 without backbox - Tyco branded

Conventional MCP210/MCP211 Callpoint



The MCP210 is a red indoor callpoint with LED indicator and evacuate resistors. The MCP210 is LPCB approved and is supplied without a backbox.

Product Codes

514.001.143.A
MCP210 ADT branded
514.001.143.T
MCP210 Thorn branded

514.001.143.Y
MCP210 Tyco branded

The MCP211 is a red indoor callpoint with evacuate resistors and LED indicator. (For use with the MZX-c Panels only).

514.001.160.Y
MCP211 Without backbox - Tyco branded
514.001.160.A
MCP211 Without backbox - ADT branded
514.001.160.T
MCP211 Without backbox - Thorn branded

Conventional MCP230 Callpoint



The MCP230 is an IP67 red weatherproof callpoint with LED indicator and LPCB approved.

Product Codes

514.001.110.A
MCP230 ADT branded
514.001.110.T
MCP230 Thorn branded

514.001.110.Y
MCP230 Tyco branded

Conventional MCP270 Callpoint



Product Code

514.001.114
MCP270 Yellow callpoint 'Evacuate' complete with LED indicator and backbox - LPCB approved

Other Conventional Callpoints & Keyswitches



Product Code

514.002.002.A
White keyswitch in callpoint housing. English 'Bomb Alert' marking with ADT branded

Special Marine Callpoints



Product Codes

514.001.112
MCP260M Marine callpoint complete with LED indicator - IP67

514.001.113
MCP250M Marine callpoint complete with LED indicator surface mount

Callpoint Ancillaries



Product Codes

90-107

Red M141 spacer for red MCP KAC callpoints



515.001.045

Test keys for all MCP and CP style callpoints



515.001.128


Callpoint hinged cover for use on MCP & CP style callpoint models (Colour -Clear)



515.001.026

Black callpoint bezel for MCP KAC callpoints

Ancillaries - Back Boxes



Product Codes

515.001.021

Standard Red surface mounting back box for MCP & CP indoor callpoints

Unless stated the indoor callpoints are supplied as flush mount units. The range is approved for use with the standard backbox. However, the SR2-T backbox is also available.



10-115

SR2-T Optional Back Box (2 terminals) for MCP & CP indoor callpoints

Chapter 3 - Conventional Systems

Callpoint Spare Glasses - Current



Product Codes

515.001.119
EN54 Part 11 Spare Glass for MCP and CP series Callpoints (Pack of 5)

515.001.025
CP200 Glasses, clear English text on white background. No logo (Pack of 5).

515.001.127
Deformable operating unit "glass" for use in place of glasses, for kitchens or other areas where glass is not acceptable. For MCP callpoints only.

515.001.024
CP200 spare glasses, white Arabic/English text with Thorn Security logo on white background (Pack of 5)

515.001.014
CP200 Spare glasses, black Arabic text on a white background (Pack of 5)

515.001.023
CP200 Spare glasses for CP200 white dutch text on clear background (Pack of 5)

Callpoint Spare Glasses - Old



Product Codes

515.001.010
Walsall callpoint glasses (Pack of 10) for service spares. The Walsall callpoint is an old square callpoint with round glass



515.001.003
ZF121 Callpoint glass (Pack 10) for service spares. The ZF121 is a square metal fronted AFA MINERVA callpoint typically used on Firefinder, System 1100, ZF/System 1200, CP and CT systems



515.001.009
CP100A glass unscored (Pack 10) for service spares. The CP100A has a large square glass to the edge of the callpoint. Used on the same AFA systems as the ZF121.



Features

- Prevents accidental operation of callpoints
- Strong polycarbonate construction
- Optional break seal kit


STOPPER

The callpoint STOPPER provides protection from malicious or accidental activation of manual callpoints. Available for flush or surface mounted callpoints the 'STOPPER' is also available with optional high pitch sounder which is activated when the lid is lifted. An optional 'Break-Seal' fitting kit allows 'Break-Seals' to be used to provide extra protection.

WARNING:- Break seals only to be fitted by agreement with relevant fire authorities.

The STOPPER is suitable for all callpoints up to 100mm square, including the MCP200 and other indoor KAC style callpoints.

Product Code	Ref	STOPPER		STOPPER II	With Sounder	Weatherproof
		Flush	Surface			
515.001.029	STI6530	✓				
515.001.030	STI6531		✓			
515.001.036	STI6535		✓			✓
515.001.034	STI1230			✓		
515.001.035	STI3150			✓		✓
515.001.031	STI6532	✓			✓	
515.001.032	STI6533		✓		✓	

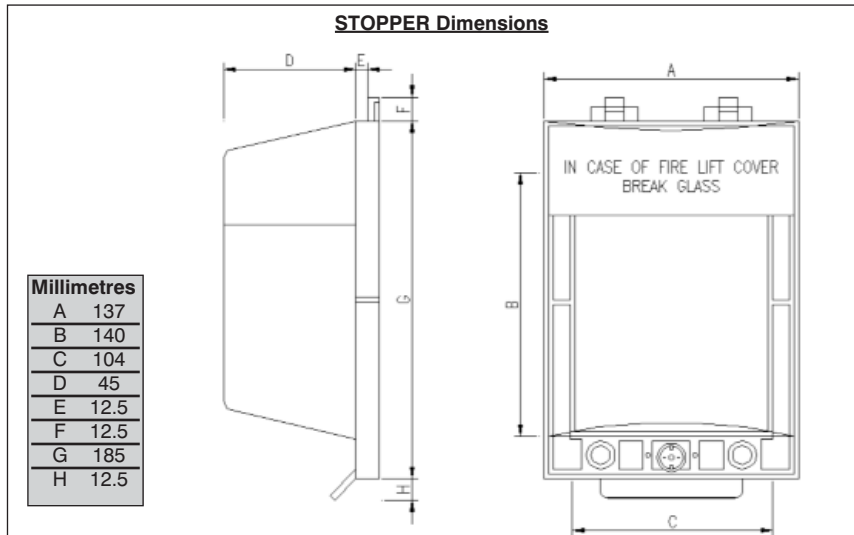


Product Code

515.001.033

IPO36 Break Seal Kit (pack of 1)

	Flush Fit	Surface Fit (+30mm)
Stopper	STI6530	STI6531
Stopper with Sounder	STI6532	STI6533

	STOPPER	STOPPER II
Max. Callpoint Size	100 x 100mm	160 x 160 mm
Max. Callpoint Depth	57.5	120 (+30mm Surface)

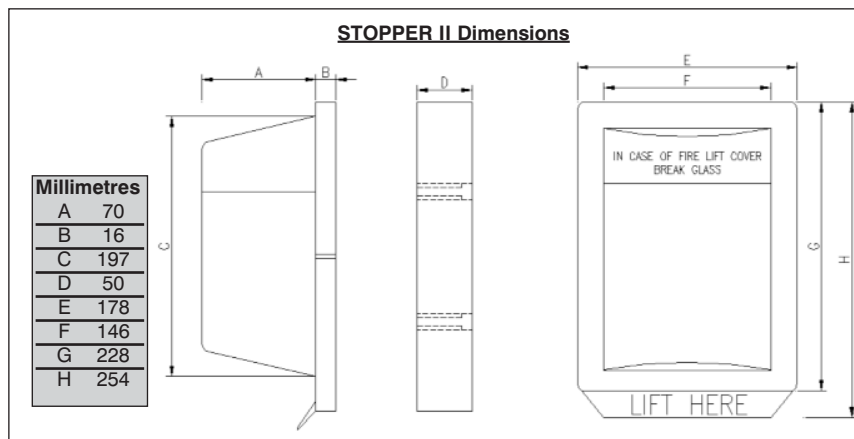

Stopper II Surface Fit - STI1230



Features

- Strong polycarbonate construction
- Will accommodate MCP230 callpoints
- Tamper resistant

STOPPER II

STOPPER II is constructed as the STOPPER from tough injection moulded polycarbonate. Physically larger than the STOPPER the STOPPER II extends the number of products to which these tough multi-purpose covers can protect.

It consists of a strong tamper-proof clear polycarbonate cover and frame that fits easily over such products as break glass callpoints.

STOPPER II can also be fitted with an integral battery powered sounder which activates if the cover is lifted.

The STOPPER II is suitable for callpoints up to 160mm square.

Product Code

515.001.034 STI1230 Surface Fit STOPPER II



Features

- Strong polycarbonate construction
- Provides environmental protection
- Ideal for offshore environments

Weather STOPPER & Weather STOPPER II

The Weather STOPPER and Weather STOPPER II extends the life of weather exposed devices, such as break glass callpoints, by offering protection against harsh conditions and environments. Experience has shown that this protective cover can extend the life of products installed in saline atmospheres, such as oil rigs and ship decks.

While offering environmental protection the Weather STOPPER and Weather STOPPER II are constructed from tough durable polycarbonate which will also guard against tampering, vandalism or accidental operation of devices such as emergency switches.

Product Codes

515.001.036 STI6535 Surface fit Weather STOPPER
515.001.035 STI3150 Surface fit Weather STOPPER II

Smoke Beam/CCTV Guard



The Smoke Beam/CCTV Guard is manufactured from tough coated steel rod and is designed to protect projected beam detectors or CCTV cameras from vandalism or accidental damage.

Suitable for use with System Sensor, Hochiki and Fireray 2000 detectors.

Technical Specification

Dimensions: 260H x 200W x 321D mm

Product Code

516.015.009

STI9625 Smoke beam/CCTV guard

Keybox



This tough polycarbonate breakglass keybox is available to protect emergency keys.

Product Code

515.001.043

STI6720 Keybox with printed glass

Sounders and Beacons



Features

- Wide range of both bells and electronic sounders
- High sound output characteristics
- Low current consumption
- Clean lines, modern styling
- Easy to install, low installation costs
- Weatherproof units for outdoor use
- Distinct sounds are available
- Motorised and Solenoid bells available
- Wide range of voltages available

Sounders

A range of sounders to meet a wide variety of alarm applications where loud, penetrating and distinctive warnings must be given to alert people of fire situations.

In addition, multitone electronic sounders can give a variety of sounds to signal other conditions e.g. "extinguishing gas release imminent," etc.

Note: For I.S. & Flameproof sounders, please see the special hazards section.



Features

- Solenoid Operated
- Designed for Long Life
- Stove Enamelled Dome

6" Red Solenoid Operated Friedland Bell

The bells are the underdome type, with a high resonance pressed alloy-steel gong to ensure a loud clear ring tone.

The operating mechanism is fully enclosed and the gong is red stove enamelled for long life. The bells are designed for internal use, but gasket sealed conduit boxes can be provided for external use.

Product Codes

- 576.500.014 240V Red bell 6" 240Vac solenoid operated. 'Fire' text
- 576.500.015 24V Red bell 6" 24Vdc solenoid operated. 'Fire' text
- 577.001.002 Weatherproof gasket box for use with Solenoid operated bells



Features

- CE marked
- Low current 6" bell (ONLY 11mA)
- Low cost
- Extra high 95dBA/m
- Slim profile (53mm)
- Fully suppressed and polarised
- Quick and easy to install
- LPCB approved to EN54 Pt 3

6" & 8" Motorised Bells

Model	MBF-6EV	MBF-8EV	MBA 8EV
Rated Voltage	24V d.c.	24V d.c.	24V d.c.
Rated Current	11mA	17mA	18mA
Sound output	90-95dBA	90-97dBA	91-97dBA
Operating Temp	-12 to +50°C		-10 to +50°C
Colour	Red		
Weight	410g	640g	1100g with back box

Product Codes

- 576.501.039.A MBF-6EV ADT Branded
- 576.501.039.T MBF-6EV Thorn Branded
- 576.501.040.A MBF-8EV ADT Branded
- 576.501.044.A MBA-8EV ADT Branded
- 576.501.044.T MBA-8EV Thorn Branded
- 576.501.045 BBX4 (2) W/P Backbox for MBA-8 Bell



Features

- Weatherproof Option
- Flexible Mounting Option
- Attractive Design

Electronic Solenoid Bell

Unique patented alarm bell with miniature solenoid and integrated electronic control. No backbox required for surface wiring.

Technical Specification

Dimensions:	6" diameter
Voltage:	18-30Vdc
Typical Current:	24Vdc@30mA
Typ. Sound Output:	94dB (A)@1m

Product Codes

20-100	6" 24Vdc Electronic bell, weatherproof
20-101	6" 24Vdc Electronic bell - red
20-111	6" 24Vdc Electronic bell - white



Features

- New Aesthetic Design
- 32 Selectable Tones
- 3 Volume Settings
- Push and Twist Mount
- Low Current Consumption

Banshee Multi-Tone Sounder

The Banshee Multi-Tone Sounder replaces the well established range of Banshee and Bedlam sounders. The new range provides a compact unit capable of 32 tones and also incorporating a volume control.

The Banshee is easily installed and is fitted with robust loop through terminations. The design incorporates a bayonet push and fit feature for easy installations.

Technical Specification

LPCB and Vds approved to EN54 pt 3

Low Current consumption

32 Tones

3 Volume settings

Rated at IP66 or IP45

Operating temperature: -40°C to +70°C

Operating Voltage: 9 to 30 Vdc

Product Codes

- 576.501.005.A Banshee Multi-Tone Sounder Red, Low profile base (ADT) (Replaces 576.501.004.A & 576.001.008.A)
- 576.501.005.T Banshee Multi-Tone Sounder Red, Low profile base (Thorn) (Replaces 576.501.004.T, 576.501.008.T & 576.501.019)
- 576.501.016.A Banshee Multi-Tone Sounder Red, Weather Proof base (ADT) (Replaces 576.501.015.A & 576.501.024.A)
- 576.501.016.T Banshee Multi-Tone Sounder Red, Weather Proof base (Thorn) (Replaces 576.501.015.T & 576.501.024.T)
- 576.501.025.A Banshee Multi-Tone Sounder White, Low Profile base (ADT) (Replaces 576.501.033.A)

Accessories



The combined mounting bracket for the Besson Multi-tone Banshee and Xenon Beacon allows quick and neat installation of combined sounders and beacons. The bracket allows the following electronic sounders to be mounted with the range of 1W Xenon Beacons:

- Besson Banshee
- MINERVA FIRECRYER voice enhanced sounder

The bracket can be used with any of the 24Vd.c 1W Xenon beacons in red, clear, amber or blue (Part no.'s 540.001.030/031/032 & 033)

Product Code

576.501.047

Banshee/Xenon bracket

Besson Wafer Sounder



The standard Besson Wafer sounder is supplied in white with a blank cover included. The specification is as follows:

Input voltage: 24V d.c. (+/-25%)

Sound Output: 60dBA/90dBA at 1m typical (pot. Adjustable) offering the same sound formats as the Banshee sounder range. It can therefore be used in conjunction with the Banshee sounders on the same site.

Technical Specification

Current: 4mA to 15mA
 Temperature Range: -40°C to + 70°C
 Dimensions: Dia 103mm, Height 22mm (excluding coverplate)

Product Code

576.501.038

Besson wafer sounder and blank cover in white

Flush Mount Bedroom Sounder



Meeting the requirements for BS5839 part 1, the Bedroom Sounder range is well suited to hotels and residential environments where aesthetics is a prime concern. Matching the sound output of the Banshee range of sounders so therefore they can be mixed on the same site.

Features

- Low current consumption 7mA
- Dual sound options selected via a jumper switch: 'Continuous' and 'Fast Sweep' 90dB
- Can be both Flush and Surface mounted
- Robust terminal connectors to accommodate up to 2.5mm² conductors

Product Codes

576.501.032.A

Flush Mount Sounder ADT Branded

576.501.032.T

Flush Mount Sounder Thorn Branded

Yodalarms



This versatile range of sounders are ideally suited for fire, safety and security hazard warning.

Technical Specification

Dimensions:
 YO3: 89H x 89W x 85D mm
 YO5: 134H x 134W x 128D mm
 YO8: 216H x 216W x 153D mm

Product Codes

576.501.001

YO3 Yodalarm 3" 24Vdc 100dB @ 1Mtr

576.501.002

YO5 Yodalarm 5" 24Vdc 106dB @ 1Mtr

576.501.003

YO8 Yodalarm 8" 24Vdc 112dB @ 1Mtr

MZX-c 2 Wire Symphoni Sounder



A Symphoni electronic sounder designed specifically for installation on the detection zone of the MZX-c panel

Technical Specification

Sound Output @ 1M: 100dB(A) +/-2dB(A) @ 24Vdc
 Tones: Continuous - 970Hz
 Alternating - 970/800 Hz at 2 Hz
 Pulsed - 970 Hz at 1Hz
 Operating Temp: -25 to +70 C
 Construction: Red/White ABS
 Ingress Protection: IP42
 Termination: 2.5mm² Screw Terminals

Product Codes

576.501.204
 Symphoni 2 Wire Sounder (Red)
 576.501.205
 Symphoni 2 Wire Sounder (White)

24Vdc Symphoni Sounder



The 24Vdc Symphoni Sounder is a general purpose internal sounder, available either as a very high output sounder for noisy areas, or a high output low current sounder for applications where power is limited. Both versions share the same horn and backbox which has double cable entries for ease of installation.

The low power version has 3 selectable tones which may be employed for one, two or three stage alarm applications. The high output version has 32 selectable tones and retains full tone compatibility with the Roshni, Squashni and Askari product ranges.

Product Codes

576.501.200
 SY/R Low Power Red Symphoni Sounder (3 tone)
 576.501.201
 SY/W Low Power White Symphoni Sounder (3 tone)
 576.501.202
 SYHO/R High Output Red Symphoni Sounder (32 tone)
 576.501.203
 SYHO/W High Output White Symphoni Sounder (32 tone)

Technical Specification

Model	Symphoni High Output	Symphoni (Low Power)
Operation	2 Hours Continuous	Continuous
Operating Voltage Range	9-28Vdc	12-30Vdc
Sound Output @ 1m	Up to 120dB(A)	100dB(A) +/- 2dB(A) @24Vd. c.
Volume Control		Down to 80dB approx.
Current Consumption	240mA +/- 20mA on Tone 3	5mA +/- 1mA at all volumes
Tones	1 to 32	Alternating 990Hz/650Hz@2Hz Continuous 990Hz Intermittent 990Hz, On/Off@1Hz
Synchronisation	Synchronised Start	Synchronised Start
Frequency Stability	+/- 0.15%	+/- 0.5%
Operating Temperature	-25 °C to +55°C	-25°C to +70°C
Line Monitoring Method	Polarised Input	Polarised Input
Construction	ABS Plastic Case	ABS Plastic Case
Ingress Protection	IP42	IP42
Weight	0.58Kg	0.212Kg

Roshni



A flexible alarm sounder for Fire and Security applications complete with volume control and dil switch to provide 32 tones.

Low profile Roshni with Deep base offers IP65 protection. All Roshni sounders have synchronised start for self synchronisation without third wire.

Technical Specification

Dimensions: 93 Dia x 105D mm (Deep base)
 Colour: Red or white
 Output Voltage: 9-28Vdc
 Typical Current: 24Vdc@16mA
 Typ. Sound Output: @1m 102dB

Product Codes

ROSHRDSR
 ROSHNI Sounder c/w deep base - red

576.501.220
 ROSHNI Sounder c/w shallow base - red
 576.501.221
 ROSHNI Sounder c/w shallow base - white
 576.501.222
 ROSHNI/Flashni Deep Base - Red
 576.501.223
 ROSHNI/Flashni Deep Base - White

Squashni



The Squashni electronic sounder is the original ceiling sounder for use as a universal fire detector platform or as a stand alone sounder complete with blank cover. It comes preset to tone 3 with a volume control and is fully compatible with Roshni tones, and has a synchronised start.

Technical Specification

Dimensions: 112 Dia x 27D mm
Colour: Matched to leading fire detector manufacturers
Approvals: None
Output Voltage: 9-28Vdc
Typical Current: 24Vdc@16mA
Typ. Sound Output: @1m 93dB (A)

Product Codes

576.501.030
Squashni white 24Vdc
576.501.031
Blank cover plate white for Squashni

Multi-Tone Askari Compact



The Multi-Tone Askari Compact is a compact bedroom sounder for unobtrusive installation. It comes with a volume control and is fully compatible with Roshni tones and has a synchronised start. A surface mount backbox is available from the supplier to special order.

Technical Specification

Dimensions: 87.5H x 87.5W x 36D mm
Colour: Red or white
Approvals: BS 5839 pt 1
Input Voltage: 9-28Vdc
Typ. Current: 18mA @ 24Vdc
Typ. Sound Output: 97dB (A) @1m

Product Codes

576.501.242
Multi Tone Askari Compact Sounder - white
576.501.243
Multi Tone Askari Compact Sounder - red



Features

- 4 predefined voice messages
- Custom messages available
- Low current consumption

Firecryer

The FIRECRYER is an electronic sounder which provides as default the same electronic sound as the MT Besson Banshee and in addition, provides 4 predefined voice messages, which can be synchronised across a zone of sounders.

The FIRECRYER offers an excellent service upgrade opportunity in the UK for systems installed to BS5839pt1 and may also provide opportunities elsewhere.

Technical Specification

Dimensions:	IP45 - 92dia 61.3 Hmm IP66 - 92dia 85.5 Hmm
Operating Voltage:	Nominally 24Vdc Min. 18Vdc Max. 30Vdc
Current Consumption:	Average 19mA Min. 10mA Max. 23mA (Subject to message)
Sound output:	Fast sweep - 100dBA
Voice message:	97dBA approx
Polarity D.C.	reverse polarity protection
Operating Temp:	-25°C to +70°C
Humidity:	90% relative humidity (non-condensing)
Weatherproofing:	Standard base - IP45 Special base - IP66
Housing Material:	Red Flame-retardant ABS
Standard Messages:	
AK	- "Fire Emergency, please remain calm and evacuate the building immediately."
AB	- "This is a fire alert. This is a fire alert. Await further instructions. Await further instructions."
SP	- "This is an ADT fire alarm test. No action required."
AD	- "Fire Alarm Test Now Complete."

Product Codes

576.501.042	Banshee IP66 backbox for Firecryer Sounders
576.501.052	Mini Fire Cryer Voice Enhanced Base Sounder Cable Spacing Ring
576.501.051	Multi Message Synchronised Mini Fire Cryer Voice Enhanced Base Sounder
576.501.035.A	MFC4SUA 4 message Red ADT Branded Fire Cryer Sounder
576.501.104.A	MFC4SCA Custom Message Red ADT Branded Fire Cryer Sounder
576.501.105	MFC-CM Fire Cryer Custom Message Chip

Chapter 3 - Conventional Systems

FIRECRYER cont'd

Additional Features

Four Message

With four messages fire tests can be easily differentiated from alert and evacuate messages.

Two Wire Connection

The FIRECRYER uses a standard 2 wire 24V d.c. connection to carry power, message switching and message synchronisation. This enables a quick and easy upgrade to existing bells and sounders.

MINERVA MT Banshee Compatible

The electronic alarm sound and mechanics of the FIRECRYER are the same as other Banshee sounders in the range. This allows them to be mixed with other sounders in a zone. It also means that existing Banshees can be very quickly upgraded to FIRECRYERS.

Multi Message Variants

Multi-message versions only require a multi-message switching PCB added at the fire panel which then allows all FIRECRYERS on two sounder circuits to be synchronised.

Low Power

The FIRECRYER takes marginally more power than an equivalent electronic sounder. This enables voice enhanced sounders to be offered without the high additional cost of large battery backups.

Standard Products

The FIRECRYER is available in ADT branding with pre-defined English messages and 100dBA fast sweep alert sound to comply with BS5839Pt1. Other variants with different branding, languages, messages and different tones are available upon request.

Product Codes	Product Reference	Message				Brand	Synchronised
		1	2	3	4		
576.501.035.A	MFC4SUA	AK	AB	AD	SP	ADT	Yes
576.501.104.A	*MFC4SCA	Customer Defined				ADT	Yes
576.501.051	F/C/4A	AK	AB	AD	SP	-	Yes

* For recording of special messages there is a charge. This can be ordered under product code 576.501.105 MFC-CM. This includes the supply of a different timer chip for the FIS/VMC synchronisation board.

Single Gang Lamp/Buzzer Units



Lamp Buzzer units may be used for local alarms when high level audible warnings may not be appropriate. Available in flush and surface mount versions to fit standard single gang backboxes.

Features

- Low Current
- Flush or Surface Mount
- Hi-Brightness LED

Technical Specification

Dimensions: 90H x 90W
x 40D mm
Current Rating: 15mA at 24Vdc
nominally

Product Codes

540.011.012
Single gang flush mount LED (red)/Buzzer Unit labelled 'Fire Alarm'
540.011.013
Single gang surface mount LED (red)/Buzzer Unit labelled 'Fire Alarm' c/w surface backbox.

Solista LED Beacon



Ultra low power requirement 3mA or 6mA at 24Vdc. Long life low profile design. Protected to IP54, supplied complete with base.

Product Code

576.501.230
Solista LED Beacon (Red)

Easy AV™ Retrofit LED Beacon



This low power LED beacon is designed to be retrofitted to existing Banshee electronic sounders. Easy and fast installation typically 3 min. Low power 6mA max at 24Vdc. High Output LEDs.

Product Code

576.501.012
Easy AV strobe for Banshee Sounders

NOTE: For I.S. Flameproof Beacons, please see the special hazards section.



Features

- Available in 1, 2, 3 and 5 watts
- Protected to IP65
- Attractive low profile design
- Optional bracket for mounting both Beacon and Banshee Sounder

Xenon Beacons - 24V Including Surface Mount Adaptor

This high quality range of Xenon beacons are tested to IP 65 making them ideal for the most stringent applications.

Each beacon incorporates a low profile Fresnel lens designed to give maximum light output.

Technical Specification

Voltage V d.c.	Power Output Watt(s)	Alarm Current mA	Flash Rate	Rating	Temp. Range	Dimensions (mm)	
						Height	Diameter
24	1	42	60/min	IP65	-30 to +70°C	51	75
24	2	84	60/min	IP65	-30 to +70°C	51	75
24	3	126	60/min	IP65	-30 to +70°C	51	75
24	5	210	60/min	IP65	-30 to +70°C	75	90

Product Codes

540.001.030	Low profile clear 24Vdc 1 watt
540.001.031	Low profile blue 24Vdc 1 watt
540.001.032	Low profile amber 24Vdc 1 watt
540.001.033	Low profile red 24Vdc 1 watt
20-112	Low profile red 24Vdc 2 watt
20-113	Low profile red 24Vdc 5 watt
20-120	Low profile red 24Vdc 3 watt



Solex 10 cd Xenon Beacon

A Solex 10 Candela Xenon Beacon with a red lens and a white shallow base which can be used wherever a high power xenon beacon is required.

Features

- High Power – 10 Candela
- Current Surge Suppression
- High Efficiency – 88mA at 24VDC
- 1 Hz Flash Rate
- Protected to IP54
- Wide Operating Voltage – 10 to 60 VDC
- Operating Temperature -25°C to + 70°C

Due to the high power output and current consumption it is recommended that this device is not used with the MZX-c, MZX-c+ or similar small panels (an SB520 sounder booster module and PSU may be required in some cases).

Product Code

576.501.232	Solex 10 cd Beacon with red lens and white base
-------------	---



Features

- Combined strobe & sounder
- Matches Roshni sounders
- Weather Resistant to IP65

Flashni

A combined sounder and beacon which combines the features of the Roshni electronic sounder with a fully integrated Xenon beacon.

These sounders are fully compatible with all Roshni tones.

Technical Specification

Dimensions:	93 Dia x 92D mm (Shallow base)
	93 Dia x 121D mm (Deep base)
Output Voltage:	18-30Vdc
Typical Current:	68mA@24Vdc
Typ. Sound Output:	101dB (A)@1m

Product Codes

20-118	Combined Roshni sounder/strobe complete with deep base (IP65).
576.501.224	Combined Roshni Sounder/Strobe, Red Body/Red Lens complete with shallow base & tone switch.
576.501.227	Combined Roshni Sounder/Strobe, Red Body/Red Lens, deep base, tone switch & separate sounder/strobe operation.



Squashni G3/AV Sounder Beacon

This low current combined sounder/beacon is ideal for standalone usage utilising the optional blanking cap or can be used in conjunction with a 4" base and detector. When used with a detector it will provide a single point of installation for the detector, sounder and beacon.

Features

- Combined Sounder and LED Beacon
- Low Current -10mA @ 24VDC
- 6 selectable tones
- Volume control (2 levels)
- White housing, clear lens with red LED's
- DDA compliant audio visual solution for UK
- Neat unobtrusive design
- Ideal for hotels, care homes, schools & offices
- Independent power cables allow a large number of AV platform sounders to be driven from a single 24V circuit
- 90dB sound output
- >1Cd light output at 1 Hz
- Approved to EN54-3 (pending)

This is a conventional sounder / beacon and needs to be powered from the panel sounder outputs.

Product Codes

576.501.250	Squashni G3/AV Sounder Beacon
576.501.255	Squashni G3/AV Blanking Cap – Pack of 5
517.050.401	4" Universal Base
517.050.005	4" Detector Base Locking Pin Kit (PK100)



Features

- 2 Wire for use with MZX-c Fire Controllers
- Combined Sounder and LED Beacon
- Low Current
- 4 selectable tones
- Volume control (2 levels)
- Beacon Only option (switchable)
- White housing, clear lens with red LED's
- DDA compliant audio visual solution for UK
- Neat unobtrusive design
- Ideal for hotels, offices, care homes, schools & offices
- 90dB sound output
- >1Cd Light output at 1 Hz
- Maximum number per zone = 10

Squashni G3/AV 2 Wire Sounder Beacon - (Twin Wire)

This low current combined sounder beacon is designed specifically for installation on the detection loop of the MZX-c control panel. Ideal for standalone usage utilising the optional blanking cap or can be used in conjunction with a 4" base and detector.

When used with a detector it will provide a single point of installation for the detector, sounder and beacon.

This is a 2 wire sounder/beacon and can be used on all zones of the MZX-c control panel.

Product Codes

576.501.251	Squashni G3/AV 2 Wire Sounder Beacon
576.501.255	Squashni G3/AV Blanking Cap – Pack of 5
517.050.401	4" Universal Base
517.050.005	4" Detector Base Locking Pin Kit (PK100)

Service & Spares

T1200 CONVENTIONAL MARINE PANEL

C1626 4 ZONE PANEL MOTHERBOARD WITH AC PSU (509.023.001)
C1626 4 ZONE PANEL MOTHERBOARD WITHOUT AC PSU (509.023.002)
C1627 16 ZONE PANEL MOTHERBOARD WITHOUT AC PSU (509.023.003)
C1627 16 ZONE PANEL MOTHERBOARD WITHOUT AC PSU FOR T1232 (509.023.004)
C1626 REPEATER MOTHERBOARD WITH AC PSU (509.023.011)
C1626 REPEATER MOTHERBOARD WITHOUT AC PSU (509.023.012)
C1628 4 ZONE PANEL DISPLAY PCB (509.023.021)
C1628 16 ZONE PANEL DISPLAY PCB (509.023.022)
C1629 32 ZONE PANEL DISPLAY PCB (509.023.023)
C1628 16 ZONE REPEATER DISPLAY PCB (509.023.031)
C1629 32 ZONE REPEATER DISPLAY PCB (509.023.032)
C1630 OUTPUT EXPANSION INTERFACE PCB (2605060)
C1632 16 ZONE PANEL EXPANSION PCB (509.023.042)
PS136 5.0 AMP 110/230VAC PSU (509.023.051)
PS40 1.5 AMP 24VDC PSU (509.023.052)
T1200 SPARE KEY SET (509.023.061)

MZX-c CONVENTIONAL PANEL

2 ZONE 2 WIRE MZX-c MOTHERBOARD (2605508)
4 ZONE 2 WIRE MZX-c MOTHERBOARD (2605509)
8 ZONE 2 WIRE MZX-c MOTHERBOARD (2605510)
MZX-c MOTHERBOARD 8 ZONE REPEATER (2605505)
MZX-c POWER SUPPLY (BAQ35T-24)
MZX-c SPARE ENABLE KEY (2501061)

MZX-c+ CONVENTIONAL PANEL

MZX-c+ SPARE KEY SET (557.201.508)
MZX-c+ 5.0 AMP PSU - C1652 (2605071)
MZX-c+ TRANSFORMER 1.5 AMP (2000636)
MZX-c+ TRANSFORMER 3.0 AMP (2000637)
MZX-c+ TRANSFORMER 5.0 AMP (2000638)

MZX-e EXTINGUISHING PANEL

MZX-e SPARE KEY SET (557.201.508)

EXTINGUISHING ANCILLARIES

LAMP 28V 60mA (MCC) FOR T525 (599.001.012)
24V5WSBC SP BULB FOR E1/E3 (599.001.029)

MANUAL ALARM CALLPOINTS

ZF121 CALLPOINT GLASS (PK10) (515.001.003)
CP100A CALLPOINT GLASS UNSCORED (PK10) (515.001.009)
WALSALL CALLPOINT GLASS (PK10) (515.001.010)
CP200 CALLPOINT GLASS-ARABIC (PK5) (515.001.014)
CP200N CALLPOINT GLASS (PK5) (515.001.023)
CP200 CALLPOINT ARABIC/ENGLISH GLASS (PK5) (515.001.024)
CP200 CALLPOINT ENGLISH GLASS NO LOGO (PK5) (515.001.025)
STOPPER BREAK SEAL KIT-RED (PK1) (515.001.033)
MCP/CP CALLPOINT TEST KEY (PK1) (515.001.045)
MCP/CP CALLPOINT EN54 PT11 SPARE GLASS (PK5) (515.001.119)
DEFORMABLE MCP ELEMENT (PK1) (515.001.127)

Tyco Expert Graphics (TXG)



Emergency Management System & Fire Detection Graphical User Interface

Tyco Expert Graphics is a new client/server emergency management system and fire detection graphical user interface.

TXG is based on a Tyco graphical alarm monitoring system that has been installed on hundreds of large fire detection and alarm monitoring systems around the world and will now be able to integrate the Minerva® MX product range with improved functionality, particularly suited to the MX Graph markets.

Tyco Expert Graphics provides annunciation, status display, and control for various fire detection and alarm systems including MX networks incorporating the latest MX Technology™ fire detection systems. It also supports the predecessor Minerva® fire detection systems thus ensuring that future updates from Minerva® to MX technology™ can be accommodated. Additional support is provided for Simplex 4100 range, Zetfas and Fast2000\PBS (Token ring format).

TXG is a Microsoft Windows® based graphical interface with a high resolution colour display. Responsive touch-screen (optional) buttons with realistic icons provide control switches specific to the operation being performed. Utilising a combination of symbols, floor plans, pictures, text, voice messages and video input, TXG displays the precise location and gives instructions on what emergency action should be taken.

Additional Features

- Link up with I.P. CCTV camera systems, no additional wiring, reduced installation cost for a fully integrated fire\CCTV system
- Compatible with Flamevision® FV300 array based IR flame detectors with built in CCTV
- MX Hotspot, chromatic analogue display. Programmable tracking of analogue values. Changes display colour in response to changes in analogue value from a selected number of MX devices.
- Trending diagrams of analogue values helps reduce maintenance time and cost
- Export analogue values to Excel for in depth analysis
- Audio descriptions of screens can be played when they are displayed or played when an event occurs

Features

- Provides annunciation, status display, and control in both normal and emergency situations
- Developed by Tyco specifically to provide monitoring and control of fire protection life safety systems
- Supports a range of fire detection systems:-
 - Minerva® MX
 - Minerva®
 - Simplex 4100 range 4100, 4120, 4020,4100U with upgrade paths to 2120
 - Zettler Zetfas, Wormald PBS16, Tyco Fast 2000
- Multiple workstations can be configured for specific functions or redundant operation
- Single monitor or two monitor (text and graphics) support at each workstation

The display can be configured to track detector inputs by changing the colour of areas in response to changes in analogue value. A detailed map of the area affected can be printed automatically for use by personnel responding to an emergency. Prompt response to a fire emergency, with the correct action, provides the opportunity to reduce financial loss and greatly improves safety.

Much of the work involved in configuring TXG has been simplified through the automatic import of panel configurations and the ability to use a wide range of input data file types including GIF, JPG, bitmap, AutoCAD®, Vector and WAV files.

System maintenance can be carried out via the high level user interface with the ability to edit the position and attributes of point icons as well as make changes to drawing layouts. As well as simplifying maintenance, being a true client server application means that any number of on-site or off-site workstations can interrogate the database with pre-defined security levels to facilitate any required combination of access and control.

- High level user interface allows end user to make changes to point attributes and layout further reducing lifetime cost of ownership.
- Centralised security administration means that operator accounts are administered through the TXG client's common database
- Mouse, keyboard or touch-screen control with full multimedia compatibility
- Dual language switching
- The ability to display live video when specific predefined alarm conditions occur
- Easy to configure and set-up. No special networking or PC training required
- Facilities and maintenance management report and analysis tools are available

Chapter 4 - Networks and Graphics

The IP Video feature allows real-time images of the area at risk to be displayed in the event of an alarm or fault. Video capture of the affected area appears on the screen automatically, allowing the severity of the situation to be assessed quickly and the appropriate executive action to be taken.

For less serious incidents, expensive and unnecessary plant shut downs can be avoided. In more critical situations, accurate information can be quickly and efficiently communicated to the response team.

MX HOTSPOT Icons representing the devices being monitored will change colour dependant on status, alarm, normal, fault, isolate etc.

In addition to this, selected areas can be highlighted using the chromatic analogue display feature, MX HOTSPOT. As the analogue value of a monitored point changes the chromatic analogue display will change the highlight colour through a pre-defined range.

For example a heat detector assigned MX HOTSPOT could transit the highlight from blue to red. The number of chromatic steps is dependant on the resolution of the graphics card used, 16, 24 or 32 bits.

NOTIFICATION BY EMAIL

Events, whether they are real or false alarms are handled most efficiently when information can be quickly and accurately communicated. TXG allows users to set up email groups and notification texts linked to predetermined events.

These are automatically transmitted ensuring that the appropriate resource is deployed.

ADDITIONAL FUNCTIONS AND FEATURES

- Response buttons with configurable icons or text provide control switches specific to any operation being performed
- Uses a combination of symbols, floor plans, pictures, text and video to communicate events
- Standard MX and Minerva® symbol libraries supplied
- Gives instructions on what emergency action should be taken
- Prints maps and instructions to assist response teams
- History logging recallable or printable by event, dates, device, or a host of other available filters
- The advanced filter allows the history report to be specifically limited to a particular range or date period.
- Commands to control outputs from the Graphical User Interface
- Events can be accepted individually or can be "auto-accept"
- Supports all standard PC image file types (i.e. GIF, JPG, BMP), AutoCAD® & Vector file types

AVAILABILITY AND ORDER PROCESS

TXG can be downloaded from the tycoemea.com website and can be used with a time restriction for demonstration or training purposes. TXG can also be ordered from our Letchworth and Echt distribution centres.

Customers can fax or e-Mail an order form which details the software options required, to customer service at Letchworth. Original order forms can be obtained from <http://www.tycoemea.com/>. This form will allow customer service to prepare and allocate a license code that will activate the required features. Customers will also be required to place an order on JDE for each part number on the form.

A media pack containing CD with license number, dongle, manual and original order form will be dispatched to the customer.

On receipt, the software can be loaded and the license number entered to make available the requested software features.

Product Codes

508.040.100	TXG USB Server Dongle/License/Software English
508.040.001	TXG001-Single Client with 1 panel (Requires TXG USB)
508.040.002	TXG004-Single Client with 2 to 4 panels (Requires TXG USB and TXG001)
508.040.003	TXG010-Single Client with 5 to 10 panels (Requires TXG USB, TXG001 and TXG004)
508.040.004	TXG020-Single Client with 11 to 20 panels (Requires TXG USB, TXG001, TXG004 and TXG010)
508.040.005	TXG999-Single Client with 21 or above panels (Requires TXG USB, TXG001, TXG004 TXG010 and TXG020)
508.040.011	TXG-C Additional Client license
508.040.021	TXG-MIN80 Minerva driver license
508.040.025	TXG-OPC - OPC Alarm / Event & Data Access Server Licence
508.040.027	TXG-CPP - SIMPLEX CPP driver
508.040.033	TXG-PBS/FAST2000 DRIVER
508.020.023	Dell Optiplex 780 DT PC (no monitor) for use with TXG
508.020.019	19" LCD Touchscreen

TXG IS TOTALLY SCALABLE




.....FROM A SINGLE FIRE ALARM PANEL CONNECTED TO A TXG SERVER.....

The modest additional cost of a single TXG client/server is easily justified when the benefits that a Graphical User Interface bring are considered.

TXG with direct connection to a single Minerva® MX

.....TO A COMPLEX INSTALLATION WITH MULTIPLE DIVERSE NETWORKS AND DISTRIBUTED CLIENTS

Large multi-building facilities may have a number of fire detection networks, possibly installed over an extended period of time. TXG can be used as a hub to integrate these systems with a number clients providing annunciation and control where it is needed.

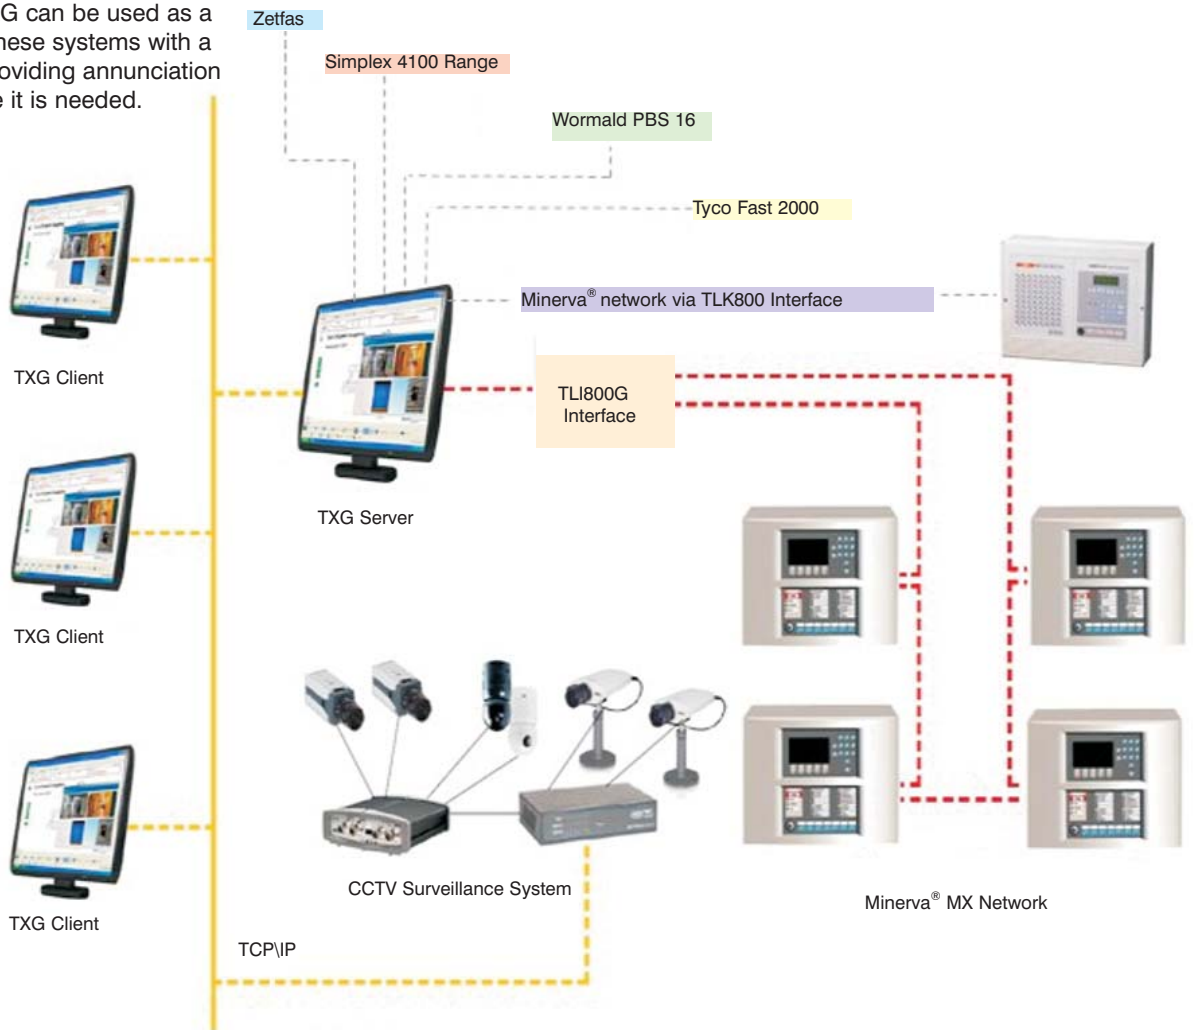

TXG with multiple fire detection networks and CCTV integration



Features

- LPCB approved
- A peer to peer network that does not use a host or master controller.
- 99 nodes, 99,000 points, 23,760 zone capacity.
- Bi-directional signaling.
- Open/short circuit isolation.
- Events originating at any node can be used as an input to event/action processing of other panels to co-ordinate and distribute systems control.
- System can be configured in the field using MX Consys software.
- Failure of one node does not affect any other node or communications between nodes. In the event of multiple failures, nodes will automatically re-generate into independent fully functional networks.

MXNet

MXNet provides a true peer to peer communications interface for up to 99, MINERVA MX, or MINERVA T2000 fire controllers in any combination and the TXG, graphical user interface. The units can be inter-connected into a large network without the need for a host or master controller. MXNet is based upon a combination of hardware and software that allows MX fire controllers (Nodes) to be linked together.

The MXNet supports up to 99,000 analogue/addressable points and over 49,000 digital I/O points. The network co-ordinates and distributes alarm annunciation and supervises system operation. When connected to the network, each MX Fire controller maintains its full stand-alone features, functions and capabilities.

Additional Features

- Automatic network re-configuration when a previously failed node is restored to the network.
- Up to 3,000 metres between nodes with twisted/shielded cable.
- System will operate on standard 2 core MICC.
- MX controllers may be grouped into sub-nets where each panel is programmed to inter-act only with other selected controllers.
- Plug-in module (TLI-800) easily connects an MX fire controller to the network.
- Data is re-generated at each MX controller and is sent out over the MXNet as new clean data. All degradation in received data due to noise on a line, line attenuation, or phase shifting is eliminated when the data is re-generated.
- The MXNet uses a token-passing, non collision communication protocol for data transmission.
- "Network zones" and "sectors" allow the network controllers to be configured as a single "seamless" system.
- TXG, a P.C. based graphical user interface, connects directly on to the network.
- MXNet supports combinations of MICC, twisted/shielded pair cabling, fibre optic cabling, and dedicated telephone line.
- Multiple communication topologies bus or ring.

TLI-800



The key hardware component that makes the network possible is the LPCB approved network card TLI-800. The TLI-800 provides the electrical/mechanical means to connect the components of the network to local and remote network signalling circuits. Installation of the TLI-800 is simplified with an edge connector that plugs onto the main processor board of the MX controller. The TLI-800 provides RS-485 communications over a twisted shielded pair as a standard configuration.

The distance between controllers can reach 3,000 metres at a speed of 38.4 Kbs using 18AWG twisted shielded cable. It fits within the MX panel housing.

Product Codes

557.202.026	TLI-800 MXNet network node interface module
557.200.038	TLI-800G ThornNet interface for MXGraph PC c/w 240V PSU and housing
557.180.219	MXGraph PC to TLK-530-G & TLI-800G connection cable

TLD-530



The Telephone Line Driver Module (TLD-530) is used to interface two (2) dedicated telephone line circuits to the TLI-800 module. The TLD-530 line driver module converts the RS-485 signals received from the TLI-800 network interface module to signals capable of being transmitted over the telephone line circuits. One TLI-800 supports two channels so only one module is required per controller for both single path and redundant path star connections. The interface allows for field configured baud rates and supports distances of up to 3,000 metres. Up to two units can be fitted into a TLO/TLD Housing.

Technical Specification

Dimensions	170H x 120W x 20D mm
Weight	140g

Product Codes

557.180.699	TLD 530 ThornNet/MXNet direct line driver PCB
557.180.148.A	TLO/TLD Housing - ADT branded

CCU3



The CCU3/C-MXMB provides a MODBUS interface to a number of MX panels on an MXNet. CCU/IO boards may also be connected to provide general I/O devices accessed through the MODBUS interface.

The CCU3/C-MXMB connects to MX panels on the MXNet via a TLI-800 (TPI) interface card using RS232 (PL2 socket). It connects to MODBUS via either an RS232, RS485 (default) or RS422 connection. Another port allows up to 8 CCU/IO boards to be connected. Each CCU/IO has 8 relay outputs that can be used as inputs to the MX. These contacts are controlled via WRITE commands to the MODBUS map. Each CCU/IO also has 8 supervised inputs whose status can be read from the MODBUS map.

Technical Specification

Input Voltage	18-30Vdc
Current	150mA at 24Vdc
Dimensions	140 x 105 x 15mm

Product Code

557.202.046	MX CCU3/C-MXMB MX to MOD Bus Interface
-------------	---



The CCU3/C-MX Bridge enables the direct connection of an MX Technology® fire controller and Minerva® 16E or 80 fire controllers via the H-Bus Communications Driver Module (CDM). No network cards are required in this configuration. The CDM attaches on to the Minerva® H-Bus and provides a serial port for the CCU3/C-MX bridge.

Product Codes

557.202.123	MX Bridge CCU3/C-MX Bridge
557.180.025	Minerva Comms Driver Module



Features

- Facilitates Integration of MX & Minerva Systems
- Easy Upgrade Path for MINERVA systems

MX Minerva - Bridge

The MX Minerva bridge enables a mix of Minerva and MX Panels anywhere on a shared network to operate as an integrated system.

Housed in either a MXAPSU17 or MXAPSU38 housing, the MX-Minerva bridge is a translating host converting packets between the Minerva format and the MX format in both directions. Flexibility is provided for packet conversion in the bridge configuration programme.

The bridge comprises of 2 network cards and a translating host (CCU).

The MX Minerva bridge can be added to one mixed network using both Minerva and MX Nodes or it can be connected to span between two physically separated network rings, one with Minerva nodes and one with MX nodes.

Technical Specification

Size:	320x440x120mm (17A/H) 320x440x215mm (38A/H)
Input voltage:	120-250VAC - 50/60Hz
Operating Temp:	8° to +55°C
EMC/RFI:	EN50130-4










Product Codes

557.202.120	MX-Minerva Bridge Kit (17AH)
557.202.121	MX Minerva Bridge Kit (38AH)

Chapter 5 - Detector Test Equipment


Detector Test Equipment for Point Detector Testing/Commissioning

The solo range of test equipment provides a range of easy to use products for commissioning and servicing all types of point detectors.

Telescope Poles		
	<p>Product Codes 517.001.230 SOLO100 Telescopic pole 1.26M to 4.5M long</p>	<p>517.001.226 SOLO101 Extension tube 1.13M long for use with Telescopic extension pole (517.001.230)</p> <p>517.001.264 SOLO 610 Protective Carry/Storage Bag for Solo Detector Test Kit</p>
SOLO330 Test Gas Dispenser		
	<p>Product Code 517.001.255</p> <p>SOLO330 Aerosol dispenser for use with all detector ranges. (Connects directly to SOLO100/101 poles).</p>	
SOLO461 Heat Detector Tester		
	<p>Product Codes 517.001.254</p> <p>SOLO461 Cordless heat detector tester kit including SOLO460 tester, SOLO720 battery batons and</p>	<p>SOLO724 charger. (Connects directly to SOLO100/101 poles). 517.001.239 SOLO760 Spare battery baton for use with SOLO 450/460 tester</p> <p>517.001.243 SOLO725 Spare mains/car battery charger for SOLO760 battery baton</p>
Smoke Detector Test Gas		
	<p>Product Code 517.001.256</p> <p>Suretest Solo aerosol tester can. For use with SOLO 330 dispenser. Non-flammable, ozone and environmentally friendly. Approx 200 tests per can.</p>	
CO Detector Test Gas		
	<p>Product Code 517.001.262</p> <p>CO Detector Tester Solo C3 -006 for use with Solo 330 dispenser.</p>	
800RT Detector Removal Tool		
	<p>The 800RT detector removal tool fits the SOLO range of telescopic poles and allows 800 Series detectors to be remotely fitted, removed and turned to the "park" position.</p>	<p>The tool also enables detector dust covers to be easily removed. The 800RT is also compatible with Series 600 Low Profile detectors.</p> <p>Product Code 516.800.917 800RT Removal Tool</p>
M900 Address Key Extractor Tool		
	<p>The M900 Address Key Extractor Tool can be used to remove the address key from either a 4" or 5" detector base from ground level.</p>	<p>Product Code 517.001.235 M900 Address Key Extractor Tool</p>
SOLO704		
	<p>Product Code 517.001.224</p> <p>SOLO704 Adaptor tube B - Adapts SOLO100/101 pole sets for TYCO detector changers and testers</p>	
SOLO200		
	<p>Product Code 517.001.240</p> <p>SOLO200 Universal detector changer for use with various</p>	<p>manufacturers detectors - not suitable for 600/800/900 series low profile detectors. Connects directly to the SOLO100/101 poles.</p>

Chapter 5 - Detector Test Equipment

SOLO TEST EQUIPMENT FOR POINT & FLAME DETECTORS

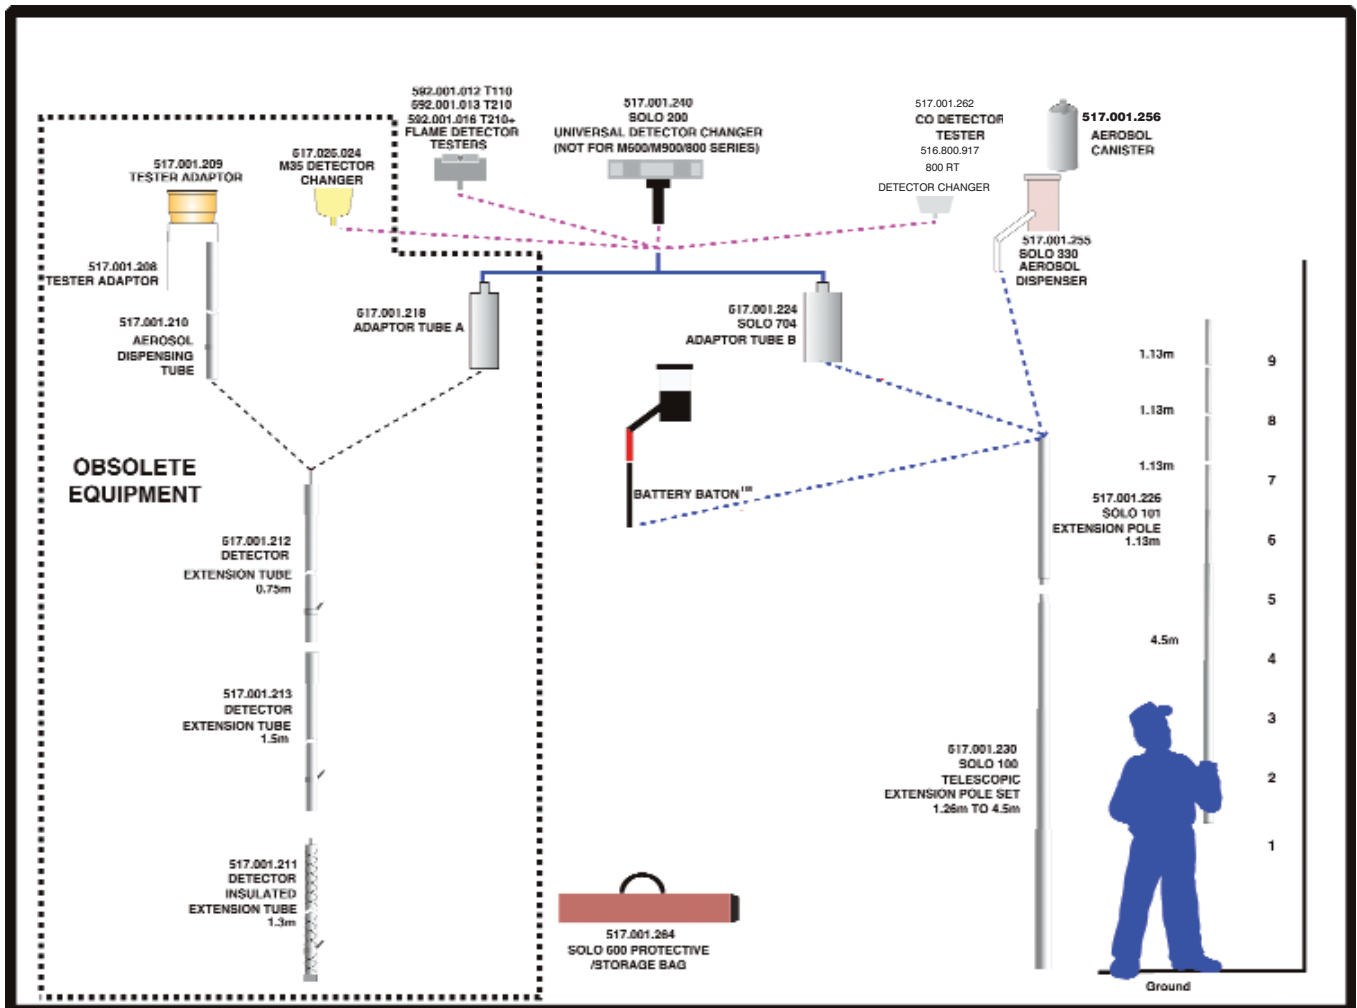

Features

- Approved for use in zone 1 & 2 areas (GPIIC gases)
- Adaptor plate to ensure perfect alignment
- IECEX Approved



S200+ Series Test Equipment Technical Specification

Material: Glass filled polyester
 Weight: 0.8kg
 Supply Voltage: 9Vdc
 Operating Temp. -10°C to + 50°C
 Humidity: 95% (Non Condensing)
 Enclosure: IP54
 Classification: Atex EEx e ib IIC T4. Suitable for use in zones 1 & 2 where group IIC gases or lesser hazards are sometimes present in explosive concentrations.

Product Codes

592.001.016 T210+ Test source for use with Solo 704 Adaptor Tube B (517.001.224) and Solo 100/101 Poles (517.001.230/226)
 592.001.014 T210+Adaptor required for the T210+ to be used with S200 and S200 Plus Flame Detectors
 592.001.010 T110 PP9 Battery and Charger Kit

Manual - Vol01B-01-G5 "Detectors Fire Manual"

S100 Series Test Equipment



Product Codes

592.001.012

T110 Test Source for use with Solo 704 adaptor tube B (517.001.224) and Solo 100/101 poles (517.001.230/226)

592.001.010

T110 PP9 Battery and Charger kit



592.001.018

T110 Adaptor for series 600 and 800 flame detectors

This page is left intentionally blank.


Batteries, PSU and Chargers



Product Codes	Voltage (V)	Ah at 20h rate	Length	Dimensions (mm) Width	Height	Height including Terminals
PS-1221	12	2.1	178	35	60	66
PS-1230	12	3.0	134	67	60	66
PS-1270	12	7.0	151	65	94	98
PS-1212	12	1.2	97	42	51	54
PS-12650	12	65.0	348	167	178	178
PS-12380	12	38.0	197	165	170	170
PS-6100	6	10.0	151	51	94	98
PS-12170	12	17.0	181	76	167	167
PS-12260	12	26.0	166	176	112	125
PS-1242	12	4.5	90	70	101	105
PS-12120	12	12.0	151	98	94	100

Product Codes

PS-1221	12 Volt 2.1 Ampere hour rechargeable sealed lead acid battery
PS-1230	12 Volt 3.0 Ampere hour rechargeable sealed lead acid battery
PS-1270	12 Volt 7.0 Ampere hour rechargeable sealed lead acid battery
PS-1212	12 Volt 1.2 Ampere hour rechargeable sealed lead acid battery
PS-12650	12 Volt 65.0 Ampere hour rechargeable sealed lead acid battery
PS-12380	12 Volt 38.0 Ampere hour rechargeable sealed lead acid battery
PS-6100	6 Volt 10.0 Ampere hour rechargeable sealed lead acid battery
PS-12170	12 Volt 17.0 Ampere hour rechargeable sealed lead acid battery
PS-12260	12 Volt 26.0 Ampere hour rechargeable sealed lead acid battery
PS-1242	12 Volt 4.5 Ampere hour rechargeable sealed lead acid battery
PS-12120	12 Volt 12.0 Ampere hour rechargeable sealed lead acid battery

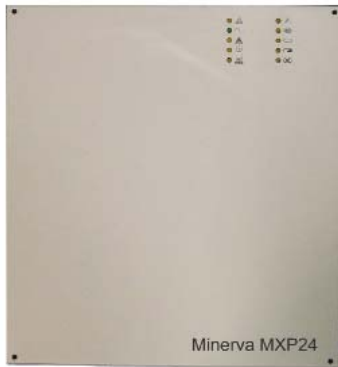

Features

- Robust metal housing
- Twin fused outputs
- Temperature compensated charging
- Deep discharge protection of batteries
- Fault relay output
- Size 383mm wide x 408mm high x 97mm deep
- Weight 4.3 Kg (excluding batteries)
- Operating temperature -5°C to +40°C
- Supply voltage 230VAC 50/60Hz
- Comprehensive LED status indication

Minerva MXP24/50 PSU

The MXP24/50 PSU is approved by IMQ to EN 54-4:1997 + A1:2002 and EN60950-1:2001. The steel housing contains a 5 amp switch mode power supply and monitoring board and has space to accommodate 2 x 12V 17Ah sealed lead acid batteries. The 10 front panel LED's comprehensively indicate the status of the unit.

Product Code

558.004.020 Minerva MXP24/50-U/TSP 5A Charger & Housing

Door Release Equipment

Door Release Magnets



The door magnet range encompasses 2 metal and 2 ABS housed wall mounted and 1 floor mounted release magnet sets

Features

- Integral release button
- Attractive design
- Slimline ABS housed units
- Robust floor mounted unit



Door release magnet set, Wall Mount, Metal Housing, 24VDC

Product Code
3-59-0404-S001



Door release magnet set, Wall Mount, Metal Housing, 230VAC

Product Code
3-59-0404-S002




Door release magnet set, Wall Mount, ABS Housing, 24VDC

Product Code
3-87-0351




Door release magnet set, Wall Mount, ABS Housing, 230VAC

Product Code
3-87-0352



Door release magnet set, floor mount, ABS housing 24VDC

Product Code
3-84-0301



Floor mounting bracket for adapting wall mounted door magnets to floor mount

Product Code
2-34-035G-S001

Technical Specifications

3-59-0404-S001 - 89 x 89 x 70mm, 0.5Kg, 180N Holding Force, 1.15W Coil @ 24VDC

3-59-0404-S002 - 89 x 89 x 70mm, 0.5Kg, 180N Holding Force, 1.15W Coil @ 230VAC

3-87-0351 - 95 x 87 x 46mm, 0.36Kg, 200N Holding Force, 1.15W Coil @ 24VDC

3-87-0352 - 95 x 87 x 46mm, 0.36Kg, 200N Holding Force, 1.15W Coil @ 230VAC

3-84-0301 - 110 x 96 x 96mm, 0.7Kg, 200N Holding Force, 45mA Coil @ 24VDC

Door Release Power Supply



The Transformer Rectifier is a dual purpose, smoothed power supply providing either an energised or de-energised output upon activation. The output may be activated by utilising a set of volt free contacts from a fire or security panel, or by providing a 12/24Vdc trigger voltage from other apparatus.

The transformer rectifier units are normally used to control the operation of other 24Vdc equipment such as magnetic door retainers. The units are ideal for applications where the supply is to be energised from a remote source.

Product Code
558.004.010
ELM 24V 4A Door Holder PSU

Technical Specification

Input: 240Vac
Output: 24Vdc 4A
Dimensions: 200H x 230W x 80Dmm

Door Release Button



Door Release Button supplied with surface mount backbox for manual release of door magnets or door release units.

Product Code
519.001.008
Door Release Button

Auxiliary Interface Relays

Boxed Relays



Product Codes

567.005.004

Relay 5010. Supplied with 1 PCB but can fit a maximum of 2 PCB's each containing up to 5 plug in relays. Order relay (569.001.007) separately.

568.001.002

Relay 5010 PCB (5 Relay)



Metal boxed heavy duty alarm relay with 25A mains rated DPCO contacts. Available with either a 240VAC 12mA or 24VDC 50mA rated coil. Suitable for heavy duty switching applications.

Product Codes

567.007.008

Alarm Relay 240Vac MK4

567.007.009

Alarm Relay 24Vdc MK4



RU1-24, this is a metal boxed auxiliary relay with 5 A Mains rated double pole contacts with a 24 VDC 25mA coil. This compact relay is suitable for interfacing a fire alarm controller to low current mains powered devices or contactors

RU1-24

Relay Boxed 24Vdc Coil 5A contacts

Relays



Product Code

569.001.007

Cradle relay and retaining clip 2 C/O 26V nominal 700 ohm coil 5 amp (used with Relay 5000 and 5010).



Product Code

609.001.015

Polarised & suppressed 24VDC double pole C/O relay with gold clad contacts, 2K ohm coil, 2 Amps @ 30VDC (PCB Mounted)

Fire Notice Frames



These frames are used mainly for Fire Alarm Zone Charts and are available to fit A4 to A1 size drawings. These come supplied with fitting hooks.

Product Codes

525.001.005

A4 Dimensions: 212mm x 297mm

525.001.006

A3 Dimensions: 280mm x 356mm

525.001.008

A2 Dimensions: 483mm x 367mm

525.001.007

A1 Dimensions: 483mm x 737mm

Fire Resistant Cable

Fire Resistant Cable

DÄTWYLER Lifeline cable is suitable for fire alarms and emergency lighting where BS6387 and BS7629 standards are acceptable and meets the installation and performance requirements of:

- BS5839 Pt.1 for use in fire alarms
- BS5266 for use with emergency lighting
- IEC331 fire resistance

Lifeline is LPCB approved to BS6387 CAT CWZ and BASEC approved to BS7629.

Lifeline is low smoke, zero halogen, has an integral aluminium backed mylar tape screen with tinned drain wire and requires no special terminations, tools or ferrules for installation.

Full details of Lifeline cable can be found in the DÄTWYLER Lifeline datasheets on the Tyco Safety Products website (www.tycoemea.com).

DÄTWYLER offer a wide range of cable and safety cabling systems including complete safety cable systems to DIN4102 part 12.

The following DÄTWYLER Lifeline cables are held in stock at Tyco Safety Products Letchworth warehouse, together with suitable P clips and glands. Cables are priced per metre but must be ordered in units of 100 metre. P clips and glands are priced each but must be ordered in packs.

Technical Specification

Construction

Conductor:	Bare copper, solid or stranded to BS 6360
Insulation:	Special double layer insulation according to BS 7655, E15
Inner Covering:	High temperature resistant glass fibre tape
Screening:	Al-Laminated tape with tinned copper drain wire, solid to BS 6360
Outer Sheath:	Flame retardant polyolefin compound according to BS 7655, LTS3

Technical Properties

Rated Voltage:	300/500V
Test Voltage:	2000V, 50Hz core/core 2000V, 50Hz core/screen
Operating Temp:	-15°C to +90°C
Core Colours:	2 cores + earth: red, black 4 cores + earth: red,yellow,blue,black
Sheath Colour:	Red or white

General Properties

Zero Halogen, no corrosive gases - IEC 60754-2, BS 6425 part 1
 Reduced fire propagation - IEC 60332-3, BS 4066 part 3
 Minimum smoke emission - IEC 61034, BS 7622
 Insulation integrity - IEC 60331 (FE180), BS 6387 (cat. CWZ)

Approvals

BASEC

Product Codes

Product Codes	DÄTWYLER Lifeline cable			
	No. Cores	Core Size	Colour	Clips
599.048.020	2 + earth	1 mm	Red	P34 R
599.048.022	2 + earth	1.5 mm	Red	P34 R
599.048.023	2 + earth	1.5 mm	White	P34 W
599.048.024	2 + earth	2.5 mm	Red	P37 R
599.048.032	4 + earth	1 mm	Red	P37 R
599.048.034	4 + earth	1.5 mm	Red	P40 R
599.048.035	4 + earth	1.5 mm	White	P40 W
599.048.036	4 + earth	2.5 mm	Red	P43 R

Product Codes	DÄTWYLER Lifeline Fire Resistant P Clips & Glands		
	Qty. per pack	Reference	Colour
599.048.001	50	P34	Red
599.048.002	50	P34	White
599.048.003	50	P37	Red
599.048.005	50	P40	Red
599.048.009	10	NG1	Red
599.048.010	10	NG1	White

No. of Cores x Cross Section (n x mm ²)	Copper Content (Kg/Km)	Total Weight (Kg/Km)	Outer Diameter (approx. mm)	Calorific Potential (KWh/m)
2 x 1.0	19	75	7.4	0.16
2 x 1.5	29	97	8.2	0.18
2 x 2.5	48	141	9.6	0.24
4 x 1.0	39	114	8.6	0.23
4 x 2.5	96	223	11.3	0.37

This page is left intentionally blank.

Aspirating Smoke Detection

Vesda aspirating smoke detection provides a high sensitivity method for detection of fires at a very early stage - it is ideal for computer rooms and other high risk and high value areas. The range of products range from the Laserfocus for small risks up to the LaserPlus range of networkable 4 pipe panels.



Features

- Laser Based Absolute Smoke Detection
- Very Early Warning of a Potential Fire Incident
- Wide Sensitivity Range (0.025%-20% obs/m) (0.008 - 6.4% obs/ft)
- Detection Capabilities for smaller critical areas up to 500m
- Dual Stage Dust Filtration
- Programmable Alarm Thresholds
- Reliable Air Flow Monitoring
- Easy User Interaction
- AutoLearn Smoke & Flow
- Pre-engineered Pipe Designs

LaserFOCUS Aspirating Smoke Detection

Incorporating detection methodology derived from its VESDA predecessors - the VESDA LaserFOCUS multiple point air sampling technology works by utilising a highly effective aspirator that continually draws air into its laser detection chamber via a pipe network.

Accurate assessment of the air sample using calibrated detection and long detector life expectancy, are assured with a patented dual stage filtration process that both eliminates background 'noise' and preserves the optical integrity of the laser technology with its clean air bleed. The result of which is an unchallenged detection process able to provide reliable and consistent very early warning smoke detection performance across a diverse range of applications.

Technical Specification

Supply Voltage:	18 to 30 Vdc
Current Consumption:	220mA quiescent 295 mA alarm
Dimensions:	255H x 185W x 90Dmm
Weight:	2 kg
IP Rating:	IP30
Operating Temp:	0°C to + 40°C
Sampled Air:	0°C to + 40°C
Humidity:	5% to 95% (non condensing)

Product Codes

516.018.020	VLF-250 Vesda Laserfocus (with English overlay)
516.018.022	VIC-010 LaserFocus VesdaNetwork Card
516.018.023	VLF-500 Vesda Laserfocus (with English overlay)



Features

- Reduced size
- Absolute smoke detection
- Wide sensitivity range
- Single pipe inlet
- Simple display
- Referencing
- VESDAnet communication (VN)
- Dual stage dust filter
- Three alarm levels
- Configurable relays
- Air flow monitoring
- Optional remote display and relay capability
- Simple mounting design
- AutoLearn™
- Marine Approved Version

LaserCOMPACT™ and MX LaserCOMPACT™

The LaserCOMPACT and VLC800 MX Laser compact detector has been specifically designed to provide all the benefits of aspirating smoke detection, including very early warning, in single small areas and where space is a premium.

This has been achieved through the combination of approved LaserPLUS detection technology, dual stage filtration technology and a modified aspirator design incorporated in a smaller enclosure with simplified display.

The LaserCOMPACT is available in two versions, one that interfaces via relays only (RO) or across either the relays or VESDAnet™ (VN).

The VLC 800MX Laser Compact is available with an in-built MX interface to enable it to communicate directly with the MX loop.

Technical Specification

Supply Voltage:	18 to 30Vdc
Current Consumption:	225mA quiescent, 245mA in alarm
Dimensions:	225H x 225W x 85Dmm
Weight:	1.9Kg
Operating Temp:	-10°C to + 39°C
Sampled Air:	-20°C to +60°C

Product Codes

516.018.011	VLC-505-VN VESDA net Version (VN)
516.018.010	VLC-500-RO Relays Only Version (RO)
516.018.012	VLC800 MX Addressable Vesda Laser compact (Compatible with MX Consys versions 2.1 and above)
516.018.030	VLC-500-RO Relays Only Version (RO) Marine
516.018.031	VLC-500-VN Vesdanet Version (VN) Marine
516.018.032	VRT-J00 Remote Display c/w 7 relays Marine



Features

- Wide sensitivity range
- Laser-based light source
- 4 Configurable alarm levels
- Purpose built Aspirator
- 4 In-line Inlet pipes
- Flow sensor for each inlet pipe
- Wide range DC power
- Low-cost maintenance
- Dual stage filter
- Easy access to filter cartridge
- 7 Software configurable relays
- Recessed mounting
- Multiple exhausts

LaserPLUS Standard Modular Range

The detector assembly contains the laser detection chamber, high efficiency aspirator, monitored filter cartridge, control electronics and relay interface. The detector assembly can be used as a “distributed” system, with the display, programmer and VESDAnet socket modules mounted in a remote location.

Alternatively, the detector assembly can be configured as a “self-contained” system by replacing the detector’s blank panels with the display and/or programming modules.



516.018.001
VLP-012 LaserPLUS Detector, programmer and display



516.018.002
VLP-002 LaserPLUS Detector and display



516.018.013
VLP-400 LaserPLUS Detector with fire OK LED

Technical Specification

Supply Voltage: 18 to 30Vdc
 Current Consumption: (No display or programmer)
 240mA quiescent plus 50mA alarm (24Vdc at 3000 rpm)
 Dimensions: 225H x 350W x 125D mm
 Weight: 4.0Kg (including display and programmer modules)
 Operating Temp: 0°C to + 39°C
 Humidity: 0-95% RH, non condensing

Product Codes

516.018.001 VLP-012 LaserPLUS Detector, programmer and display
516.018.002 VLP-002 LaserPLUS Detector and display
516.018.013 VLP-400 LaserPLUS Detector with fire OK LED



Features

- Individual pipe annunciation
- Adaptive scan threshold
- Wide sensitivity range (0.005 to 20% obs/m)
- Laser based light source
- Configurable alarm levels
- Purpose built Aspirator
- 4 In-Line inlet pipes
- Flow sensor for each pipe inlet
- Low-cost maintenance
- Dual stage filter
- Easy access to filter cartridge
- Recessed mounting

LaserPLUS Scanners

VESDA LaserPLUS is also available in a Scanner configuration, which allows the system to distinguish and identify the pipe carrying smoke, while sampling multiple sectors.

The VESDA LaserPLUS will continue to sample from all sectors to monitor the fire growth and maintain full protection.

VLS-214/314 FD7/FD12 Scanner



Product Codes

516.018.004
VLS-214 FD7 Scanner, programmer and display with 7 relays.

516.018.007

VLS-314 FD12 Scanner, programmer and display with 12 relays

VLS-600/700 FD7/FD12 Scanner



Product Codes

516.018.016
VLS-600 FD7 Scanner with Fire OK LED
516.018.019
VLS-700 FD12 Scanner with Fire OK LED

VLS-204/304 FD7/FD12 Scanner



Product Codes

516.018.005
VLS-204 FD7 Scanner and display with 7 relays.

516.018.008

VLS-304 FD12 Scanner and display with 12 relays

Technical Specification

Supply Voltage: 18 to 30Vdc
 Current consumption: (No display or programmer) 240mA quiescent plus 70mA alarm (24Vdc at 3000 rpm)
 Dimensions: 225H x 350W x 125D mm
 Weight: 4.0Kg including display and programmer modules
 Operating Temp: 0°C to + 39°C
 Humidity: 10-95% RH, non condensing
 Relay Outputs: 7 or 12

Product Codes

516.018.004 VLS-214 FD7 Scanner, programmer and display with 7 relays.
 516.018.007 VLS-314 FD12 Scanner, programmer and display with 12 relays
 516.018.005 VLS-204 FD7 Scanner and display with 7 relays.
 516.018.008 VLS-304 FD12 Scanner and display with 12 relays
 516.018.016 VLS-600 FD7 Scanner with Fire OK LED
 516.018.019 VLS-700 FD12 Scanner with Fire OK LED

Datasheet - Product Code **PSF105U** "VESDA LaserPLUS"



Features





- Four alarm levels (Alert/Action, Fire 1 & Fire 2)
- 20 segment vertical bar graph
- Alarm threshold indicators (Alert, Action & Fire 1)
- Audio and visual indication
- Alarm indicators
- Informative fault indicators
- Multi-mode numeric display (defaults to smoke obscuration)
- Acknowledged push-button presses
- Multiple language supported
- Addressable to any detector

Remote Displays and Modules

A display module monitors the VESDA LaserPLUS detector. It reports a visual representation of smoke levels, and all alarm and fault conditions. The internal sounder warns personnel in the local area that an alarm threshold has been reached, or a fault has occurred.

It has a 20 segment vertical bar graph, a 2-digit numerical display, an audible sounder and clear alarm and fault indicators. It also has 4 push buttons to control the detector and the mode of the display.

Displays can be located at a convenient location - either within the detector module, or remotely on the VESDAnet. For monitoring convenience, multiple displays can be associated with a single detector.

VRT-400,700 & 800			
	Product Codes 516.018.104 VRT-400 Remote scanner display including 7 relays	516.018.107 VRT-700 Remote scanner display - no relays 516.018.108 VRT-800 Remote scanner display with 12 relays	
VRT-200,600,J00 and K00 displays			
	Product Codes 516.018.102 VRT-200 Remote display including 7 relays	516.018.106 VRT-600 Remote detector display- no relays 516.018.119 VRT-J00 Compact Display c/w 7 relays	516.018.120 VRT-K00 Compact Display no relays
VRT-300			
	Product Code 516.018.103 VRT-300 Remote VESDAnet socket		
VRT-100			
	Product Code 516.018.101 VRT-100 Remote programmer		

Technical Specification

Supply Voltage:	18-30Vdc (when used in detector unit, Remote unit or 19" rack)	Dimensions:	150H x 140W x 90D mm
Current Consumption:	60mA quiescent plus 20mA alarm @24Vdc - (module only)/90mA quiescent plus 20mA alarm @24Vdc	Operating Temp:	0°C to +39°C
		Humidity:	10-95% RH, non condensing

LaserPLUS Standard 19 Inch Sub-Rack Remote Display Assemblies



The 19" sub-rack is available as a mounting option, with 4 mounting slots for display or programming modules.

Technical Specification

Dimensions: 128H x 482W x 120D mm

Product Codes

516.018.201
VSR-2000 19" Sub-rack with 1 detector display and 3 blanks
516.018.203
VSR-2210 19" Sub-rack, 2 detector displays, programmer and 1 blank

516.018.204
VSR-2221 19" Sub-rack with 3 detector displays and programmer
516.018.206
VSR-2222 19" Sub-rack with 4 detector displays

LaserPLUS Components for Ordering Custom Built Remote Display Sub-racks



Sub-rack configurations other than those available as standard can be supplied as custom built units. The sub-rack and cost of assembly are included in the VSR-CUSTOM.

The configuration of the custom built unit must be specified at time of ordering (e.g. 2 x VSU-0 and 2 x VSU-2 configured as VSR-0022)
Note: The order of the numbers (e.g. 0022) indicates the order in which the sub-units will be mounted in the sub-rack housing when looking from the front of the unit - from left to right.

Product Codes

516.018.260
VSU-0 Blank Sub-unit
516.018.261
VSU-1 Programmer sub-unit
516.018.262
VSU-2 Detector display sub-unit plus 7 relays
516.018.264
VSU-4 Scanner display sub-unit plus 7 relays
516.018.265
VSU-5 Blank sub-unit with 7 relays
516.018.214
VSU-E Blank scanner sub-unit with 7 relays

516.018.268
VSU-8 Scanner display sub-unit with 12 relays
516.018.269
VSU-9 Blank display sub-unit with 12 relays
516.018.219
VSU-J Compact display sub-unit plus 7 relays
516.018.210
VSR-CUSTOM Custom sub-rack housing includes cost of custom building 4 VSU sub-rack units.

LaserPLUS Standard 19 Inch Rack Remote Display Assemblies



Standard rack enclosures are available to fit 2 (see picture) or 5 sub-rack assemblies.

Technical Specification

Dimensions:
020-050 300H x 400W x 140D mm

Product Code

516.018.303
020-050 IP65 Enclosure

LaserPLUS Ancillaries & Power Supply Unit



A variety of other ancillaries are available. Configuration software is available from the Xtralis website www.vision-fs.com.

Product Codes

516.018.402
VHX-0200 PC link HLI plus leads (MK2)
516.018.407
VESDA VPS-220 2A 24VDC PSU
516.018.410
VESDA VPS-250-E 5A 24VDC PSU
516.018.401
VHH-100 Hand held programmer plus leads

LaserPLUS Spares



The following common VESDA LaserPLUS spares are kept in stock by Tyco Safety Products. Other spares can be supplied if required.

Product Codes

516.018.501
VSP-002 Display (spare)
516.018.502
VSP-004 Scanner display (spare)
516.018.503
VSP-001 Programmer (spare)

516.018.505
VSP-019 Filter cover door (spare)
516.018.506
VSP-006 Spare detector chassis and manifold
516.018.508
VSP-008 Spare remote termination card 7 relays
516.018.509
VSP-009 Spare scanner chassis and manifold

516.018.514
VSP-014 Spare header termination card 7 relays
516.018.515
VSP-015 Spare aspirator fan
516.018.504
VSP-005 Filter cartridge (spare)



Features

- Powerful fan
- Upto two x 100m pipe runs
- Pipes can be individually monitored for air flow with LED bar graph
- MX Loop and 24 VDC connections
- Fault monitored via the MX Loop
- IP65 enclosure
- Field serviceable air filters
- Uses standard 25mm Vesda pipe & fittings

ICAM IAS800 Air Sampling Smoke Detection Systems

The ICAM IAS800 Air Sampling Smoke Detection System provides a flexible solution to meet the unique needs of numerous applications including industrial spaces such as cable tunnels, tamper proof and unobtrusive requirements for special accommodation, or can simply be used to replace spot (point) detectors in office environments.

The IAS800 system actively draws air from the protected area through sampling holes in a pipe network. Sampled air is then filtered before being analyzed by upto two MX Technology detectors.

The IAS800 system is available in three configurations:-

IAS800 twin inlet pipe configuration which can be fitted with two detectors for monitoring one or two pipe runs.

IAS801 single inlet pipe configuration which can be fitted with one detector.

IAS802 twin inlet pipe configuration which can be fitted with two detectors for monitoring one or two separate pipe runs with independant fault outputs.

The system utilises a high performance aspirator and software configurable flow monitoring circuitry. The air flow level is displayed on a ten element bar graph that can be adjusted for high and low flow thresholds, and flow failure is reported as a device fault via upto two MX Technology MIM800 addressable modules.

Applications:

Ideal for areas where access is restricted, harsh environments and areas where a point detector would be damaged. Such as:-

- Lift Shafts
- Floor / Ceiling Voids
- Cabinet Protection
- Conveyor Tunnels
- Hose Down Areas
- Stables
- Prison Cells
- Areas with Low Ceilings

Technical Specification

Supply Voltage	18 to 30Vdc
Current Consumption	300mA
Dimensions	259w x 184h x 166d mm
Weight	2.77 Kg
Operating Temp	-10 to +55°C (with detectors)
Humidity	10 to 90% RH NonCondensing
Sampling Pipes	25 mm dia, 100m per inlet

Product Codes

516.016.301	ICAM IAS800 Aspirated Smoke Dual Detector common fault monitor
516.016.304	ICAM IAS801 Aspirated Smoke Single Detector common fault monitor
516.016.305	ICAM IAS802 Aspirated Smoke Dual Detector dual fault monitor
516.016.303	ICAM Course Filter (PK10)

Note: Detectors to be ordered separately.

Vesda Pipe, Fittings and Test Equipment





VESDA Aspirating Pipe & Fittings are a metric standard of 25mm external diameter with suitable adaptors available for imperial to metric conversions. (British Standard approved pipes BS5391 Part 1 1976 and BS5391 Part 1 1976 for fittings). The British manufactured pipe is produced in red ABS under stringent quality control approved to BS EN ISO9001, which covers all aspects of product design, manufacture and inspection.



Features

- Toughness and durability
- Chemical resistance
- Easy to joint
- Low Friction
- Wide temperature range
- Lightweight
- Red colour for easy identification

Aspirating Pipe & Fittings

Pipe 25mm diameter		
	VESDA aspirating pipe, printed along its length on opposite side at 450mm intervals. 3 m length pipe Order in multiples of 10.	Product Code 516.018.901 Pipe 25mm diameter
Socket 25mm		
	Straight socket for 25mm pipe. Order in multiples of 10.	Product Code 516.018.902 Socket 25mm
Socket union 25mm		
	Socket union to facilitate servicing of pipework. Order in multiples of 1.	Product Code 516.018.903 Socket union 25mm
Socket Adaptor 25mm to 3/4"		
	Socket adaptor, imperial to metric, to extend existing systems. Order in multiples of 5	Product Code 516.018.909 Socket Adaptor 25mm to 3/4
Bend 25mm		
	90 degree Long Radius bend Order in multiples of 5	Product Code 516.018.904 Long Radius bend 90°

Chapter 7 - VESDA

Elbow 25mm		
	45 deg elbow Order in multiples of 5	Product Code 516.018.905 Elbow 25mm
End Cap 25mm		
	End cap 25mm Order in multiples of 5	Product Code 516.018.906 End cap 25mm
Equal Tee 25mm		
	Equal Tee 25mm Order in multiples of 5	Product Code 516.018.907 Equal Tee 25mm
Pipe Clip 25mm		
	Pipe Clip 25mm Order in multiples of 10	Product Code 516.018.908 Pipe Clip 25mm
Solvent Cement (0.25 Litre Tin)		
	Solvent cement	Product Code 516.018.910 Solvent cement
Capillary Tube Conical Sample Point Assembly		
	Capillary Tube Conical Sample Point Assembly. 25mm socket adaptor + 2m capillary tube (tube colour - red)	Product Code 516.018.911 Capillary Tube Conical Sample Point Assembly
Capillary Tube Flush Sample Point Assembly		
	Capillary Tube Flush Sample Point Assembly. 25mm socket adaptor + 2m capillary tube (tube colour - red)	Product Code 516.018.912 Capillary Tube Flush Sample Point Assembly
Capillary Tube 10 mm		
	Capillary Tube 10 mm 10mm o/d x 30m length (tube colour - red)	Product Code 516.018.915 Capillary Tube 10 mm
Pipe Cutters		
	Pipe Cutter	Product Code 516.018.918 Pipe Cutter
Pipe Ties		
	Pipe Ties (Red) Order in multiples of 100.	Product Code 516.018.920 Pipe Ties (Red)

Chapter 7 - VESDA

Sampling Point Label (1 reel)



Sampling point label. Order in multiples of 100.

Product Code
517.017.005
Sampling point label.

Pipe Label (1reel)



Pipe Label. Order in multiples of 100.

Product Code
517.017.006
Pipe Label

Pipework designs for Vesda Systems must be verified by the use of the "Aspire" pipework Design Software Tool. Available for download from the Xtralis Website at www.vision-fs.com.

Test Equipment

Wire Burn Test Box



Wire burn test box designed to heat up a measured length of special wire to produce smoke, used to test the transport time and performance of Vesda aspirating smoke detectors.

- Built in timer
- Insulated terminals
- Selectable input voltage
- Illuminated power on indicator
- Robust enclosure
- Supplied with UK power lead

Technical Specification

Input Voltage	110-120 or 220-240VAC
Output Voltage	6.3VAC @ 20A
IP rating	IP30
Timer	1 to 3 mins
Dimensions	170w x 120d x 135h (mm)
Weight	2.75Kg

Product Code

516.018.921
Wire Burn Test Box

Smoke Test Wire



Smoke test wire for use with the wire burn test box.

Technical Specification

Size	- 10/0.1mm, 0.078 mm ² CSA
Length	- 100m
Weight	- 0.25Kg

Product Code

516.018.923
Smoke Test Wire-Vesda 251-001

Fire Phones & Disable Refuge



Features

- Only three main functional building blocks simplify the system design
- Compliant with BS5839 Pt 9:2003
- Compatible with enhanced fire rated cable
- System can control & monitor up to 265 lines
- Up to 8 master handsets per system
- Large clear display on master handsets
- Optional Lockable and Weatherproof Outstations
- Battery backup for continued operation in the event of a mains failure

Emercall Fire Telephone and Disabled Refuge System

The Emercall Fire Telephone and Disabled Refuge Call System meets the recommendations of BS5839 part 9: 2003 which specifies the operation of such systems. An Emergency Voice Communication System (EVCS) is defined as a fixed bidirectional full duplex secure communication system for use in emergencies, and covers the operation of both fire telephone systems and disabled refuge systems.

A disabled refuge is defined as a location for people who are mobility impaired who will impede the general egress from the building, or need assistance in leaving the building. This obviously includes wheelchair users who may have used the lift, but also covers the elderly, pregnant women over 6 months, people with arthritis, in fact anyone who cannot walk 200 metres without a break.

An EmerCall EVCS System comprises of three system building blocks: control handsets (both main and repeater types), 8 way exchanges and Type A outstation handsets as defined by the Standard.

The Control handsets are supplied in multifunction steel and aluminium enclosures which can be wall, desk or rack mounted and contain the following items:

- Monitored phone handset
- A 4 line 20-character LCD display for displaying calls, faults and status
- 12 key keypad for dialling
- 3 menu keys for menu navigation
- 4 Indicator LED's (General Fault, Supply Fault, CPU Fault and Supply Healthy)
- 2 network interfaces with supply extraction

The Exchange unit is a compact wall mount enclosure which links the outstations to the control handsets and contains the following:

- AC mains supply with a 1.5A monitored maintained battery charger
- 8 telephone line interfaces
- Connection matrix
- Fault relay output (either Local Fault or General Fault)
- 2 Network interfaces with supply addition
- Line Fault Indication (8 LED's per line)
- Supply status (3 LED's: AC Present, DC Present, Supply Fault)
- General fault LED

Outstation handsets are supplied as type A as defined by the Standard and the choice of outstation handsets should be made in line with the guidelines of the Standard.

Chapter 8 - Fire Phones & Disable Refuge

The Type A Outstation Handset comprises a steel enclosure which is either flush mounted or surface mounted (separate cases are provided for each type) and has the following features:

- Monitored phone handset
- Telecoil in handset
- High volume ringer
- Optional lock
- Optional strobe (requires additional supply and cables)

The Type B Outstation Access Point comprises a steel enclosure which is either flush or surface mounted. It provides secure bi-directional full duplex voice communication with the following main features:

- BS5839 pt 9:2003 compliant
- Hands free operation
- High volume ringer
- Braille signage
- Duplex speech
- Red or green front

EMERCALL MASTER HANDSET



A BS5839 Pt 9:2003 compliant monitored master telephone handset. The stylish master console case is available as a desk, rack or wall mount option. The wall mount option is also available with semi flush bezels.



A Large high contrast display (4 x 20 character), 12 key quick dial keypad, full duplex system, up to eight masters per system, directory dial function, full system event log (fault and configuration),

controls up to 256 lines (32 EmerCall 2572002 exchanges), 16 character unique name per line, dual Network ports, remote powered, wall, desk or rack mount, eight status LED's, lockable door.

Product Codes

2572020
EmerCall Master Handset - wall mount
2572021
Semi Flush Bezel for 2572020
2572001
EmerCall Master Handset - desk mount
2572007
Rack Mount Kit for 2572001

EMERCALL 8 LINE EXCHANGE



A BS5839 Pt 9:2003 compliant 8 line telephone exchange unit. Controls up to 8 independent lines, mains powered, built in monitored 1A charger for 12V SLA batteries, full duplex audio, up to 32 exchanges per system, full line monitoring, serial port for configuration or updates,

dry contact for fault or "in use" indication, dual network ports, provides remote power for EmerCall Master Handset 2572001, twelve status LED's, compact design for riser mounting.

Product Code

2572002
EmerCall 8 Line Exchange

EMERCALL TYPE A



The EmerCall Type A outstation handsets as defined by BS5839 Pt 9 can be used as a fire telephone or disabled refuge call point.

Intended for use by firemen or building marshals.



BS5839 Pt 9:2003 compliant, compact design, high volume ringer, Status LED, 20mm cable glands, telecoil for hearing impaired users, magnetic push catch or locking door, fully monitored, flush or surface mount, stainless steel option.



For outdoor applications an IP66 protected outstation is also available.

Product Codes

2572003
EmerCall Type A Flush Outstation Handset with push door
2572004
EmerCall Type A Flush Outstation Handset with locking door
2572013
EmerCall Type A Flush Outstation Handset with push door - stainless steel
2572005
EmerCall Type A Surface Outstation Handset with locking door
2572006
EmerCall Type A Surface Outstation Handset with push door
2572010
EmerCall Type A Surface Outstation - IP66
2572015
EmerCall Type A Surface Outstation - IP66 - stainless steel

EMERCALL TYPE B




The EmerCall Type B hands free outstation as defined by BS5839 Pt 9 can be used in a disabled refuge call point. It can only be used as a fire telephone when it is impractical to use a Type A outstation.

BS5839 Pt 9:2003 compliant, hands free operation, compact design, high volume ringer, flashing status LED, braille signage, duplex speech, 20mm cable glands, fully monitored, stainless steel option.

Product Codes

2572009
EmerCall Type B Outstation
2572016
Flush Bezel for 2572009 - stainless steel

System Design

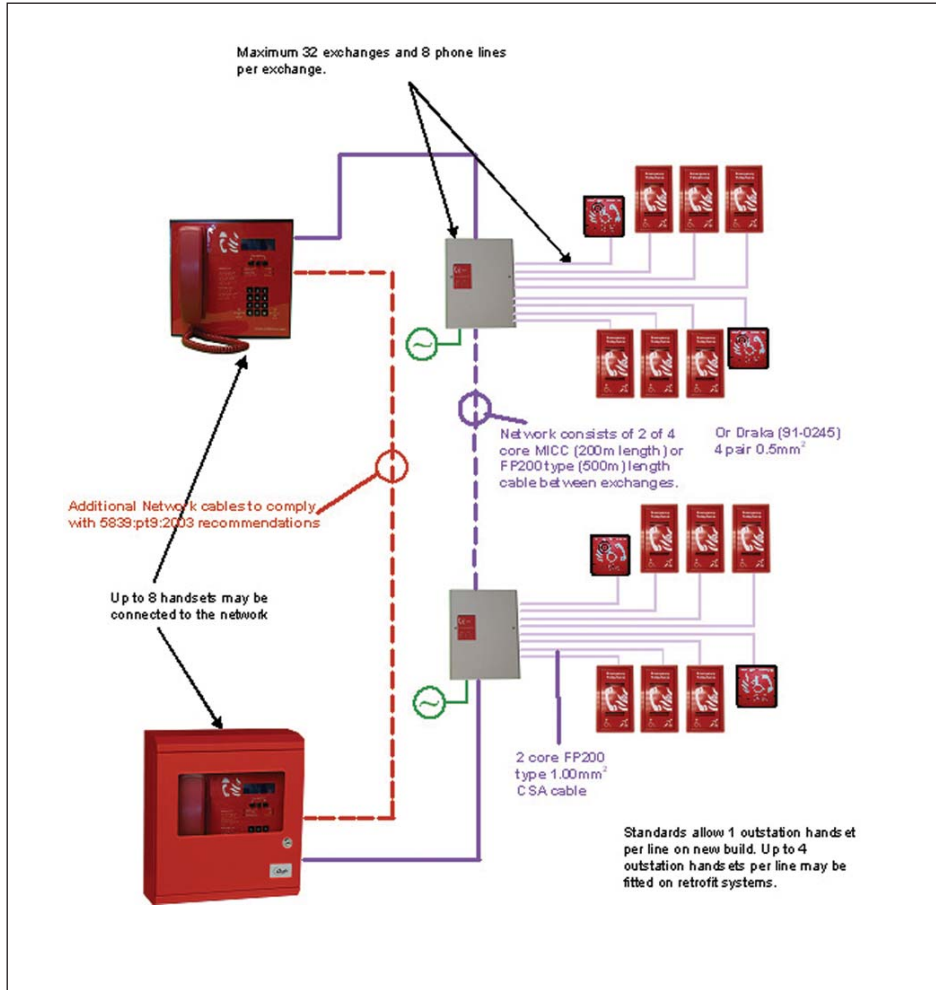

This page is left intentionally blank.

Water Leak Detection Alarms

The Water Leak detection system is a water detection system designed to be used in situations where not just flooding but also undue dampness could cause damage or ultimately become dangerous.

The system comprises an electronic monitoring and alarm control panel connected to sensors located in the area requiring protection and can be custom made with a variety of types of detection sensor to suit the characteristics of the areas to be covered.

This system has been designed for ease of installation and modern micro-electronics ensure a high degree of reliability.



Typical Applications:

- Computer Rooms, Telecommunications and Office Areas
- Electrical Plant and Tank Areas
- Valuables, Antiques and Artifacts
- In general, wherever the presence of water could be a potential problem to people, equipment, perishable stock, data/information archives and record stores, hospital theatres and so on.

There are also sensors for the detection of non-conductive fluids such as diesel/oil.

Features

- Suitable for computer rooms
- Wide range of sensors
- Relay contacts to interface to BMS or fire alarm controllers

DETEK Water Flood Detection Controllers

Controller electronics are housed in a robust cabinet and provide accurate sensing for water leakage and comprehensive alarm facilities. The system is ideal for all types of applications utilising a mixture of sensors on a single control panel to give optimum flexibility. All systems have a test facility to enable simple regular confidence checking of the equipment. Lockable cabinets constructed in mild steel with stove enamelled finish for surface mounting. 20mm Knockouts are provided for ease of cable entry.

Indications of status on each zone, wiring fault and supply healthy. Mains fail battery back-up indication where applicable. The 85dBA pulsed audible alarm has a fully functional local mute facility.

Approvals:

- Electro Magnetic Compatibility - All of the control panels and sensors have been performance tested to meet the requirements of EN55022 for emissions and EN50092 for immunity.
- British International Standards - The equipment is manufactured in accordance with EN ISO 9001 procedures.
- Electrical Safety - Manufactured in accordance with Electrical Equipment (Safety) Regulations 1994 - Low Voltage Directive (SI 1994/3260).

Technical Specification

Dimensions: 160H x 220W x 62D mm (Single Zone)
270H x 362W x 84D mm (Multi Zone)

Supply: Single phase 240VAC, 25VA

Max. Relay Contacts: Two sets of volt free change over contacts for alarm and one set for wiring fault or power loss. These may be used to link into Building Management Systems or for remote alarms and beacons up to 2A, 50Va.c./d.c.

Product Codes

508.200.004 1 Zone - water/flood control panel
508.200.005 2 Zone - water/flood control panel
508.200.006 4 Zone - water/flood control panel

Chapter 9 - Water Leak Detection

Sensor Cable

The Sensor cable comprises of high flexibility conductors insulated by Helagaine mono-filament braiding. Cable or tape sensors are suitable for general protection under false floors, or can be fastened directly to pipework enabling coverage in ceiling void areas.

The cables can be connected together, up to 100m, to cater for larger areas. For each zone a 'start of line' and an 'end of line' module is required.

Sensor Pads

Sensor pads are constructed from glass fibre with an anti-corrosive nickel plated surface. Pads will detect a few cc's of liquid and are either face up for location under vulnerable points or face down for general coverage.

Probe Sensors

Probe sensors are the least sensitive and are often employed as water level sensors. In general the sensor is enclosed in a protective cover which also provides a means for fixing and 20mm gland entry. The probe is designed for vertical mounting at skirting level though may be mounted in voids or sumps. A screw allows 16mm height adjustment after the sensor is installed.

CD5 & CD10 Sensing Cable		
	<p>Technical Specification Sensor Cable Dimensions: 8mm dia</p>	<p>Product Codes 516.200.010 CD/5 metre length of sensing cable 516.200.011 CD/10 10 metre length of sensing cable</p>
SOL Start of Line for Sensing Cable		
		<p>Product Code 516.200.012 SOL Start of Line for Sensing Cable</p>
EOL End of Line for Sensing Cable		
		<p>Product Code 516.200.013 EOL End of Line for Sensing Cable</p>
SFD Sensor Pad - Face Down		
	<p>Technical Specification Sensor Pads Dimensions: 115H x 160Wmm</p>	<p>Product Code 516.200.006 SFD Sensor Pad - Face Down</p>
SFU Sensor Pad - Face Up		
	<p>Technical Specification Sensor Pads Dimensions: 115H x 160Wmm</p>	<p>Product Code 516.200.016 SFU Sensor Pad - Face Up</p>
SFD/C Cover for Sensor Pad		
	<p>Technical Specification Sensor Pads Dimensions: 115H x 160Wmm</p>	<p>Product Code 516.200.007 SFD/C Cover for Sensor Pad</p>

Chapter 9 - Water Leak Detection

SPS/V Vertical Mount Probe Sensor c/w cover

**Technical Specification**

Probe Sensor Dimensions:
85H x 62W x 62Dmm

Product Code

516.200.004
SPS/V Vertical Mount Probe Sensor
c/w cover

FF1 Fixing Clips for Sensing Cable

**Product Code**

516.200.014
FF1 Fixing Clips for Sensing Cable

CDT Warning Labels for Sensing Cable

**Product Code**

516.200.015
CDT Warning Labels for Sensing
Cable

This page is left intentionally blank.

Special Hazards



Introduction

Tyco Safety Products manufacturers and provides a wide range of equipment suitable for use in hazardous areas where normal equipment cannot be safely used. The range extends from IS detectors for use on conventional systems to flameproof and I.S. flame detectors for use in the most demanding of environments.

A complete range of Barriers, Housings, Callpoints and Sounders are available to fully support the product range.

Electrical equipment supplied for use in Hazardous Areas must comply with rigid requirements to ensure that its introduction into the area does not increase the existing risk. Thorn Security Limited have designed Intrinsically Safe (I.S.) systems and equipment for use in Hazardous Areas which can be connected to Fire Detection Systems installed in Safe Areas.

There are two I.S. systems used by Thorn Security Limited. System 620 for use in conventional fire detection circuits and System 800 for use with MINERVA MX digital addressable circuits. The control equipment of the fire detection system must be connected either via a Shunt Diode Safety Barrier or by an Isolating Interface to System 620 and System 800.

Two Sounder Systems (one earthed and one isolated) are available for use with System 620 and System 800.

APPLICATION - GENERAL

The System Designer must be familiar with BS EN 60079-14: 2003, EN 50, EN 50020 and ATEX certification and have successfully completed an appropriate recognised course in Intrinsic Safety.

Design of the system requires that the designer has all the information concerning the installation correctly documented.

The nature of the Hazard must be defined by the customer and a survey carried out to determine the proximity of the safe area to establish cable runs. The probability of a flammable mixture being present is defined by a Zone Number. Flammable gases are classified in Groups and their minimum spontaneous ignition temperature is categorised by Class. Thorn Security equipment marked EExe ia IIC T5 would be suitable for use in worst case conditions, e.g. Zone 0 (ia), Hydrogen (IIC), T5 (100 deg C).

The Fire Alarm Equipment and Safety Barriers should be placed as near as possible to the containment wall of the Hazardous Area. This minimises the cable lengths between the barrier and the Hazardous Area and thus the capacity to store energy.

In order that an Installation will comply with the ATEX certification designated for each system it is essential that the certified devices are connected with cables of the specified limits. These limits have been certified for specific classifications of hazard in order that energy storage is limited.

Safety Barriers are incorporated into the circuit feeding the Hazardous Area to limit the voltage excursion and the current. The limit of voltage and current will prevent a fault within the I.S. circuit exceeding the ignition conditions.

THE FITTING OF SAFETY BARRIERS, ISOLATING INTERFACES OR SOUNDER DRIVERS DOES NOT IN ITSELF MAKE A CIRCUIT TO WHICH THEY ARE CONNECTED INTRINSICALLY SAFE.

Chapter 10 - Special Hazards

APPLICATION - HAZARDOUS AREA

A Hazardous Area is defined as one where in the presence of a flammable mixture, ignition may cause an explosion. There is a risk of an explosion when substances (whether liquid, gas, vapour, dust, powder, or solid) are mixed with air to form a flammable atmosphere.

To prevent the possibility of ignition in flammable atmospheres special precautions for the construction and use of electrical apparatus is required. One method of construction and use is defined as INTRINSICALLY SAFE.

APPLICATION - INTRINSIC SAFETY

To preclude the risk of an explosion, equipment in the Hazardous Area must not be capable of causing ignition under normal operating, or specific fault conditions. Limiting the energy which can be stored in, and released by, electronic circuitry and cables in the Hazardous Area is achieved by using Intrinsically Safe equipment and by placing restrictions on the cable parameters.

To complete the explosion protection concept of a circuit a Safety Barrier must be connected between the Hazardous Area equipment and the source of power in the Safe Area. The electrical power which may be supplied or drawn from a Safe Area (i.e. an area with no definable hazard) is limited by using Shunt-Diode Safety Barriers or Isolating I.S. Interface Units.

Connection of the Hazardous Area equipment to the Safety Barrier must comply with the limitations listed in the System Certification. These limits have been certified for specific classifications of hazard in order that energy storage in the cables is limited. If the Electrical Energy in a circuit is less than the value required to ignite a potentially explosive mixture then the circuit is said to be INTRINSICALLY SAFE.

APPLICATION - GALVANIC ISOLATORS

Galvanic isolators protect the integrity of an Intrinsically Safe circuit under "Fault" conditions.

Galvanic isolators operate in a fully floating electrically isolated condition, no High Integrity I.S. earth is required.

SHUNT-DIODE SAFETY BARRIERS AND INTERFACE UNITS

A Shunt-Diode Safety Barrier, Isolating I.S. Interface Unit, or Isolating Sounder Driver protects the integrity of an Intrinsically Safe circuit under 'Fault' conditions. The over-voltage protection provided by a Shunt-Diode Safety Barrier is with reference to the safety barrier earth connection. It is therefore imperative that a HIGH INTEGRITY EARTH is used for this type of barrier.

A High Integrity Earth is a current sink of nominally zero impedance capable of passing a fault current without compromising the function of the Shunt-Diode Safety Barrier. Connection to this earth and the barrier earth must not be more than 1 ohm and not less than 4mm² cross section area.

Several types of safety barrier are commercially available and include Single circuit and Dual circuit Shunt-diode, and galvanically isolating types. The Shunt-diode type requires a High Integrity Earth connection and the galvanically Isolating type operates in a fully floating electrically isolated condition; no High Integrity I.S. earth is required.

A Shunt-Diode Safety Barrier DOES NOT make a circuit to which it is connected Intrinsically Safe.

CERTIFICATION

The design and construction of the equipment that may be installed in a Hazardous Area is controlled by a scheme of inspection and certification to the EU ATEX Directive 94/9/EC. The inspection and certification is carried out by an approved ATEX notified body.

Designers are licensed to reproduce the marks on equipment that complies with the Certification listed in its License Number.

Only ATEX approved barriers/isolators and intrinsically safe hazardous area equipment may be used.

Special Hazard Flame Detectors



Features

- ATEX, ICEX & FM approved
- Fast, reliable flame detection using multi-infrared detection
- Simplifies alarm handling for remote control room situations
- Provides immediate visual ID of alarm location
- Robust stainless steel housing with heated window
- Automatic monitoring of detector functionality
- 256 cell infrared sensor array monitoring the field of view to separately identify flame and non flame sources
- Range of integral interface options
- Masking of part of field of view with software configuration tool
- 60m detection range with 90° field of view
- Remote video monitoring with fire location and detector information
- Automatic optical path monitoring
- History Log stored in detector

FV300 Array Based Flame Detectors

The FlameVision FV300 is a range of detectors that use a 256 cell multi-infrared array, to detect flame and provide positional information so that the location of a flame within the detector's field of view can be communicated. Additionally, an inbuilt CCTV camera can transmit a "detector's eye view" of the protected area to a CCTV monitor. Superimposed onto the CCTV picture will be the positional data highlighting exactly where the source of alarm is coming from.

An angle of view of 90 degrees on the horizontal plane has been achieved with little or no reduction in sensitivity over the entire field. A pan fire covering one-tenth of a square metre can be detected by the FlameVision FV300 at a range of 60 metres. Such a small fire at that range would not normally be visible on a CCTV picture. The superimposed positional data on the CCTV display highlights and identifies the source of the alarm. This can save precious time and allow executive actions to take place at the earliest opportunity thus minimising potential fire losses.

Markets:

The FlameVision FV300 detectors are intended for applications demanding a high level of protection and where a rapid response to fire is important.

Typical applications are:

- Refineries
- Drilling and production plants
- Fuel loading facilities
- Compressor stations
- LNG/LPG processing & storage
- Gas turbines
- Chemical production
- Aircraft hangars
- Waste management/transfer
- Sports stadiums
- Tank farms
- Printing industry
- Warehousing
- Munitions storage

Range of Interfaces:

As standard the FV300 is supplied with the following interfaces:

- Fire and fault relays, programmable as normally open or normally closed
- 4 to 20mA analogue current output, proportional to the flame detection signal (sink or source)
- RS485 serial data port suitable for network connection using a MODBUS protocol. This can be used to communicate the positional co-ordinates of a flame within the field of view of the detector
- Video output compatible with twisted pair video cable

Flame Vision Models:

There are six FlameVision models in the FV300 detector range. There are models with and without cameras. Each model is also supplied either with a sealed back-box and a pre-connected 3m length of cable or with two threaded cable gland entries.

FV300 Flame Detector Model Nos.	Cable gland entries	Sealed back-box
No camera	FV311S	FV312S
PAL Format camera	FV311SC	FV312SC
NSTC Format camera	FV311SC-N	FV312SC-N

Chapter 10 - Special Hazards

Technical Specification

Mechanical Characteristics

Dimensions

Height:	138.8 mm
Width:	152.8 mm
Depth:	91.7 mm
Weight:	3.96 kg
Mounting bracket weight:	1.54 kg

Materials

Enclosure:	Stainless Steel 316L, ANC4BFCLC to BS 3146: Part 2
Detection window:	Sapphire
Camera window:	Toughened glass
Guard/label plate:	Stainless Steel 316S16 to BS 1449: Part 2
Mounting bracket:	Stainless Steel 316S16 to BS 1449: Part 2
Screws etc. exposed to the elements:	Stainless Steel 316 A4

Electronic modules Fibreglass substrate

Electrical access

FV311 Series detectors: Standard M20 gland holes (two)
FV312 Series detectors: Multi twisted pair screened cable

Environmental Temp. Humidity, Enclosure Protection and Pressure

Operating temp. range without camera:	- 40°C to + 80°C
Operating temp. range with camera:	- 10°C to + 55°C
Maximum withstand temp:	120°C (for 10minutes)
Storage temp. range:	- 40°C to + 80°C
Relative humidity:	Up to 99% (non condensing)
Enclosure protection:	Tested to IP66 and IP67
Normal operating atmospheric press:	910 mbar to 1055 mbar
Heat radiation from sun:	0 to 1kWm2 typical

Product Codes

516.300.006	FV311S Flameproof Detector - cable gland entries - no camera
516.300.008	FV311SC Flameproof Detector - cable gland entries - PAL camera
516.300.007	FV311SC-N Flameproof Detector - cable gland entries - NTSC camera
516.300.055	FV312S Flameproof Detector - sealed back box - no camera
516.300.057	FV312SC Flameproof Detector - sealed back box - PAL camera
516.300.056	FV312SC-N Flameproof Detector - sealed back box - NTSC camera
517.300.001	MB300 Mounting Bracket
517.300.002	WH300 Stainless Steel Weather Hood
517.300.005	JB300 Exe Junction Box
517.300.006	MK300 Field Spares Kit
517.300.021	WT300 Walk-test Controller
517.300.022	CTI300 Off-line Configuration Tool Kit



Features

- Triple waveband infrared solar blind flame detection for optimum false alarm immunity
- Unrivalled black body rejection over a wide range of source temperatures
- Range adjustable to 50 metres for a 0.1m² petrol pan fire
- Discrimination of optical faults (dirty windows) from other faults by the built-in self test feature
- Housing designed for easy installation of cabling
- Models also available with relay or 4-20mA outputs
- Patented dual filter for complete solar blindness
- 100° field of view on IS versions
- 90° field of view on Flameproof versions
- IECEX Approved

S200 Plus Triple IR Solar Blind Flame Detector

Unlike other flame detectors on the market the MINERVA S200 PLUS is available in both Intrinsically Safe (EEx ia) and Flameproof (EEx d) models.

The intrinsically safe models are suffixed by the letter "i" and are ATEX Certified EEx ia IIC T5. As part of an intrinsically safe circuit, it is suitable for zones 0,1 and 2 where group IIC gases or lesser hazards can be continuously present in explosive concentrations.

The flameproof models are suffixed by the letter "f" and are ATEX Certified EEx d IIC T6. The detectors are suitable for zones 1 and 2 where group IIC gases or lesser hazards can be intermittently present in explosive concentrations.

Technical Specification

Detector Material:	Stainless Steel 316L/316
Dimensions:	167H x 167W x 89D MM
Weight:	4.5Kg
Gland Entry:	2 x 20mm
Range:	0.1m ² petrol at 50m 0.4m ² petrol at 60m
Operating Temp:	-40 to +80°C
Response Time:	Field Selectable 3,6 and 12s
Sensitivity:	3 range settings
Relative Humidity:	95% (100% intermittent)
Enclosure:	IP 66 and IP 67

Product Codes

517.001.266	S200+ Spares Kit & Sealant
517.001.263	S200+ Weather Protection Assembly
517.001.184	S200+ Detector Mounting Bracket

Datasheet - Product Code PSF102U "Minerva S200 Plus Series"

Approvals

Various models are certified by a number of approval bodies including those listed below.

ATEX Approved models have a suffix '1' as the third digit.
FM Approved models have a suffix '2' as the third digit.



S200 Plus Triple IR Solar Blind Flame Detector

Additional Features

- Flexible mounting and angular adjustment
- 2 x 20mm field cable entries
- IP66/67 housing designed for external use
- Rugged 316 stainless steel housing and mounting bracket
- Operating temperature range of -40 to + 80°C
- Variable response times and sensitivity settings
- Remote self test and range setting
- True window test in detection area (i.e. not in the edge of the window)
- Terminals provided for Remote LED connection where relevant
- BASEEFA (CENELEC) certified
- Approved to EN54 Pt 10 (Except for S271 & FV282F)
- IEC 61508 Approved (SIL2)
- FM, DNV and LRS certified
- Very low power consumption (0.35mA)
- Models available with Conventional or Analogue Addressable interface (requires 2 core cable only)

	Interface				Approvals			Product Codes
					ATEX		FM	
	Conventional	4-20mA	MZX Addressable	Relay	Ex 'ia'	Ex 'd'	Ex 'd'	
S231i+	✓				✓			516.037.004
S231f+	✓					✓		516.037.003
S232f+	✓						✓	516.037.015
S241i+		✓			✓			516.038.004
S241f+		✓				✓		516.038.003
S261f+				✓		✓		516.040.002
S271i+			✓		✓			516.041.004
S271f+			✓			✓		516.041.003
FV282F+		✓		✓			✓	516.040.014

System 800 Fire Detection for Hazardous Areas



Features

- Addressable I.S. MX Technology
- Compatible with S271i+ flame detector
- Compatible I.S. callpoint.
- Atex certified intrinsically safe Ex II 1 GD System
- Suitable for use in Zone 0, 1, 2, 20, 21 & 22

System 800 Fire Detection for Hazardous Areas

A complete range of ATEX and IECX certified detectors suitable for use in Zone 0, 1, 2, 20, 21 & 22 Areas. MX digital addressable for use on Minerva MX Fire Controllers.

There is a risk of fire or explosion in all areas containing flammable substances in the form of liquids, gasses, dust or materials. Where these combustible materials are mixed with air in sufficient concentration they form a flammable atmosphere and the areas containing them are designated Hazardous Areas. When a source of ignition, such as a spark, is applied in a hazardous area, an explosion could take place. Electrical equipment supplied for use in Hazardous Areas must comply with requirements to ensure that its introduction into the area does not increase the existing risk. System 800 is an MX Technology™ Intrinsically Safe (I.S) system for use in Hazardous Areas which can be connected to the MX Fire Detection Systems installed in the Safe Areas.

The System designer must be familiar with ATEX certification and have successfully completed an appropriate recognised course in Intrinsic Safety. Design of the system requires that the designer has all the information concerning the installation correctly documented. The nature of the hazard must be defined by the customer and a survey carried out to determine the proximity of the safe area to establish cable runs.

The probability of a flammable mixture being present is defined by a zone number. Flammable gasses are classified in Groups and their minimum spontaneous ignition temperature is categorised by Class. Tyco Safety Products supplied equipment marked EEx ia IIC T5 would be suitable for use in worst case conditions. E.G. Zone 0 (ia), Hydrogen (IIC), T5 (100 deg C). The Fire Alarm Equipment and Safety Barriers should be placed as near as possible to the containment wall of the Hazardous Area. This minimises the cable lengths between the barrier and the Hazardous Area and thus the capacity to store energy.

In order that an Installation will comply with the ATEX certification designated for each system, it is essential that the certified devices are connected with cables of the specified limits. These limits have been certified for specific classifications of hazard in order that energy storage is limited.

The number of devices connected to the barrier and located in the Hazardous Area must always be limited to not more than the listed maximum.

The use of the MX designer Software tool will ensure correct loop loading and it's use is essential to the design process.

System 800 is for use in MX Technology Addressable Fire detection circuits.

[Datasheet PSF129U](#)
[Manual 17A-02-DETEX](#)

801PHEx/811PHExn Smoke and Heat Detector



The 801PHEx/811PHExn Optical Smoke & Heat Detectors form part of the 800Ex Series of MX Addressable Fire Detectors. The detector plugs into the 5BEX base.

- The mode of detector may be:
- Optical smoke only detector (sensitivity - High, Normal or Low)
 - HPO smoke detector (sensitivity High, Normal or Low)
 - Heat only rate-of-rise (A1R) detector (no sensitivity selection)
 - Heat fixed temperature 60°C (A2S no sensitivity selection)
 - Optical (sensitivity High, Normal or

Low) combined with heat fixed temperature 60°C (A2S)

- HPO (sensitivity High, Normal or Low) combined with heat fixed temperature 60°C (A2S)

Technical Specification

ATEX Code:
Ex II 1GD/3G
Cenelec Code:
Ex ia IIC T5/Ex iaD 20 T100°C/
EExnA II T4
Weight:
0.2Kg detector and base (approx)
Operating Temp. Range:
-25°C to +70°C

Storage Temp:
-40°C to +70°C
Relative Humidity:
95% non- condensing

Product Codes

516.800.530
801PHEx Optical Smoke + Heat Detector
516.800.534
811PHExn Optical Smoke + Heat Detector
*Manual Vol 17A-02-PHExn
17A-02-PHEx*

801CHEx/811CHExn CO & Heat Detector



The 801CHEx/811CHExn Carbon Monoxide plus Heat Detector form part of the 800Ex Series of MX Addressable Fire Detectors. The detector plugs into the 5BEX base.

- The mode of detector may be:
- Heat only detector (A1R or A2S) (sensitivity: High, Normal or Low)
 - Compensated Carbon Monoxide detector (sensitivity: High Normal or Low)
 - Compensated Carbon Monoxide detector (sensitivity: High or Normal) combined with heat (A1R)

Technical Specification

ATEX Code:
Ex II 1GD/3G
Cenelec Code:
Ex ia IIC T5/Ex iaD 20 T100°C/
EExnA II T4
Weight:
0.2Kg detector and base (approx)
Operating Temp. Range:
0°C to +55°C/-20°C to +40°C
Storage Temp:
-20°C to +55°C
Relative Humidity:
95% non condensing.

Product Codes

516.800.531
801CHEx Carbon Monoxide + Heat Detector
516.800.535
811CHExn Carbon Monoxide + Heat Detector
*Manual Vol 17A-02-CHExn
17A-02-CHEx*

801HEx/811HExn Heat Detector



The 801HEx/811HExn Heat Detectors form part of the 800Ex Series of MX Addressable Fire Detectors. The detector plugs into the 5BEX base.

- The mode of detector may be:
- EN54-5 A1R, rate-of- rise normal ambient
 - EN54-5 A2S, fixed 60°C
 - EN54-5 CR, rate-of-rise high ambient;

Technical Specification

ATEX Code:
Ex II 1GD/3G
Cenelec Code:
Ex ia IIC T5/Ex iaD 20 T100°C/
EExnA II T4
Weight:
0.2Kg detector and base (approx)
Operating Temp. Range:
-25°C to +70°C
Storage Temp:
-40°C to +70°C/-40°C to +80°C
Relative Humidity:
95% non-condensing

Product Codes

516.800.532
801HEx Heat Detector
516.800.536
811HExn Heat Detector
*Manual Vol 17A-02-HExn
17A-02-HEx*

801FEx Flame Detector



The 801FEx point type flame detector forms part of the MX Technology® range of digital addressable fire detectors. The detector plugs into the 5BEX base.

The 801FEx is a full featured solar blind flame detectors and can detect a 0.1m² fire at a range of 20m.

Technical Specification

ATEX Code:Ex II 1GD
Cenelec Code: Ex ia IIC T4/
Ex iaD 20 T135°C
Weight:
0.2Kg detector and base (approx)
Operating Temp.Range:
-20°C to +70°C
Storage Temp:
-40°C to +80°C
Relative Humidity:
90% non-condensing

Product Codes

516.800.066
801FEx I.R. Flame Detector
516.800.067
811FEx Marine I.R. Flame Detector
Manual Vol 17A-02-FEX

IS28 Banshee Sounder



The IS28 MK4 intrinsically safe banshee sounder has been developed for use in hazardous areas. Up to a maximum of four sounders may be connected to one I.S. sounder driver. Each IS28 banshee has an output of 94dBA at one metre, this sound output will reduce

to approximately 90dBA when four sounders are fitted to a circuit.

- Features
- ATEX Certification number ITS03ATEX21311X to II GD
 - EEx ia IIC T5
 - ICEX Approved

Product Code
576.501.013
IS28 MK 4 Banshee BS5839 Low Frequency ATEX Certified Intrinsically Safe - Grey Sounder

CP840EX/CP830Exn Break Glass Callpoint



The CP840Ex and CP830Exn Weatherproof Break Glass Callpoint is designed to monitor and signal the condition of the switch contact associated with the break glass.

- ATEX Code: Ex II 1GD/3G

- Cenelec Code: Ex ia IIC T5/Ex iaD 20 T100°C/EEEx nL IIC T4

Product Codes
514.800.513
CP840Ex MX Digital Addressable Breakglass Callpoint

514.800.514
CP830Exn MX Digital Addressable Breakglass Callpoint

Manual Vol 17A-02-WCP830Exn 17A-02-CPEX

IF800Ex Interface Module



The Intrinsically Safe IF800EX Interface Module is designed to monitor fire contacts such as sprinkler flow switches. The IF800Ex is contained within a grey compression moulded glass filled polyester box with 2 x 20mm cable gland holes.

The electronic components are mounted on a double sided printed circuit board built into a potted module formed from a plastic moulding. Connectivity is via two terminal blocks fitted to the PCB.

- ATEX Code: Ex II 1GD
- Cenelec Code: EEx ia IIC T5

Product Code
514.001.062
IF800Ex MX Digital Addressable Interface Module Assembly

Manual Vol 17A-02-IFEX

EXI800 Interface Module & Galvanic Isolators



The EXI800 Interface Module, used with a galvanic isolator, provides a path for an MX panel to transparently communicate to slave devices (800Ex Detectors, IF800Ex Interface Module or CP840Ex Addressable Break Glass Callpoint) connected to the Intrinsically Safe loop. The interface reduces the standard MX loop supply voltage and signalling currents to levels that are acceptable for hazardous areas. The EXI800 can detect a short circuit of the left-loop, the right-loop, or the IS spur and will isolate the offending circuit from the other loop connections. The IS loop output of the EXI800 interfaces with the

Pepper+Fuchs KFDO-CS-Ex1.54 Galvanic Isolator supplying loop voltage and signalling currents to the Intrinsically Safe Loop. The EXI800 is supplied complete with one service tool EX dongle that is required to activate address programming using the standard MX service tool. The MTL 5021 Isolating sounder driver enables an intrinsically safe sounder device located in the hazardous area, to be controlled from the safe area. The MTL 5021 has one channel and is suitable for connecting suitable certified loads in Zone 0, IIC, T4-6 hazardous areas.

Product Codes
514.001.063
EXI800 Interface Module
517.001.259
Pepper+Fuchs KFDO-CS-EX1.54 Galvanic Isolator
557.203.008
Spare Service Tool Ex Dongle
517.001.245
MTL 5021 I. S. Sounder Driver

Manual Vol 17A-02-EXI

IS Barrier Enclosure



The MTL'DX' Series enclosure equipment will house the EXI800 (20mm pitch), Pepper+Fuchs KFDO-CS-Ex1.54 Galvanic Isolator (20mm pitch) and MTL 5021 I.S. Sounder Driver (16.2mm pitch). The units are DIN rail mounted with 70mm of rail supplied with the DX070 and 170mm of rail with the DX170.

Enclosures are usually selected on the number of units they will accommodate. The following table shows the capacity of each of the enclosure types.

Product Codes
517.001.248
DX070 Enclosure
517.001.247
DX170 Enclosure

Enclosure	MTL5000 isolators 16mm Pitch	MTL7000 barriers 7.5mm Pitch
DX070	4(2*)	9(5*)
DX170	10 (8*)	22(18*)

* Use these figures when two IMB57 mounting brackets for tagging/earth rail accessories are included.



Features

- Glass Reinforced Polyester Enclosure – light, strong and not subject to corrosion.
- Resettable Element.
- Explosion protected EExe (ATEX Approved).
- In line and end of line resistors.
- Red Epoxy Finish.
- 7 x terminals.
- Lift flap for extra protection against inadvertent operation.
- 1 x changeover switch.
- Captive cover screws.
- Key operated test facility – simple but secure.
- 1 x M20 bottom cable entry.

BG MIM800 Callpoint EX II 2 GD

An Ex II 2 GD Dust Approved & Increased Safety (EExemd) Resettable Manual Alarm Call Point for use with the EExd Flameproof MIM800 input module in EExd housing on an Addressable Detection & Releasing System in gas and dust explosive risks.

Please note that the above part is only compatible with Consys Version 17.0 and above when used with 577.800.067.

Technical Specification

Protection:	Explosion Protected EExed(Increased Safety)
Certification:	ATEX approved Ex II 2 GD BAS02ATEX2105X EExemdIICT4 CENELEC EN50014 EN50019 EN50018 EN50028 Suitable for use in Zones 1 & 2
Voltage:	Up to 250V
Certified Temperature:	-20°C to +50°C
Ingress Protection:	IP66 & 67
Terminals:	7 x 2.5mm ²
Switch Ratings(1 x Changeover):	DC 0-30V 5A (Resistive) or 3A (Inductive) DC 30-50V 1A Resistive or Inductive AC 0-254V 5A Resistive or Inductive
Cable Entries:	1 x M20 Bottom
Weight:	1.2Kg
Material:	Anti Static U.V. Resistant Glass Reinforced Polyester
Finish:	Red Epoxy Paint
Resistors:	Alarm: 100 Ohm EOL: 250 Ohm
Labelling:	Burning House Symbol
Dimensions (W X H X D):	120mm x 126mm x 75mm

Product Code

514.001.107	EX II 2 GD Dust Approved & Increased Safety (EExemd) Resettable Manual Alarm Callpoint
-------------	--



Features

- Copper Free Metal Alloy Aluminium Housing
- Explosion Protected to EExd (ATEX Approved)
- 9 x Terminals
- 3 x M20 Cable Entries
- Fast Interrupt Mode for Call Points

MIM800 Input Module in EExd Housing

An EExd Flameproof MIM800 Addressable Module for extending the monitoring of Call Points and other Alarm Inputs on an MX, ZX and MZX Addressable System in gas and dust explosive risks.

Please note that the above part is only compatible with Consys Version 17.0 and above when used with 514.001.107.

Technical Specification

Protection:	Explosion Protected EExd (Flameproof)
Certification:	Ex II 2 GD LOM02ATEX2037 EExdIICT6 CENELEC EN50014 EN50018 EN50019 EN50281-1-1 EN60439-1 Suitable for use in Zones 1 and 2 to IEC 60079-10 Suitable for use in Zones 21 and 22 to EN50281-3
Voltage:	40Vdc
Certified Temperature:	-20°C to +55°C
Ingress Protection:	IP67
Terminals:	9 x 2.5mm ²
Cable Entries:	3 x M20
Weight:	0.8 Kg
Material:	Metal Alloy Aluminium - Copper Free
Dimensions (W X H X D):	108mm x 98mm x 90mm

Product Code

577.800.067 MIM800 Input Module in EExd Housing



Features

- Allows the DDM800 to be mounted in a Hazardous Area.
- Allows the monitoring of Call Points and other Alarm Inputs (including 4-20mA devices) designed for use in Hazardous Areas on an MX, ZX and MZX Addressable System in gas and dust explosive risks.
- Approved for use in Gas Zone 1 and 2.
- Approved for use in Dust Zone 21 and 22.
- Copper Free Metal Alloy Aluminium Housing.
- Explosion Protected to EExd (ATEX Approved).
- 5 x M20 Cable Entries (3 x bottom and one each side).

DDM800 Fire & Gas Detector Module in EExd Housing

A DDM800 Fire and Gas Detector Module in a EExd Housing for use in special hazardous area applications.

The DDM800 Universal Fire and Gas Detection Module is a detector module designed to interface a wide range of conventional fire detectors to MZX Technology® control panels.

Additionally the option is available to connect two 4 to 20mA devices and to configure the alarm thresholds within the control panel.

The DDM800 is supported by MXConsys® Version 15 and above and Issue 6 MXDesigner. It is recommended that MXDesigner is used for all system designs using DDM800 modules. For detailed design and application details, please refer to document "DDM800 Universal Fire & Gas Detector Module Product Application and Design Information" reference 17A-02-DDM.

Technical Specification

Protection:	Explosion Protected EExd (Flameproof)
Certification:	Ex II 2 GD LOM02ATEX2037 EExdIICT6 CENELEC EN50014 EN50018 EN50019 EN50281-1-1 EN60439-1 Suitable for use in Zones 1 and 2 to IEC 60079-10 Suitable for use in Zones 21 and 22 to EN50281-3
Voltage:	40Vdc
Certified Temperature:	-20°C to +55°C
Ingress Protection:	IP67
Terminals:	12 x 2.5mm ²
Cable Entries:	5 x M20
Weight:	1.3 Kg
Material:	Metal Alloy Aluminium - Copper Free
Dimensions (W X H X D):	150mm x 150mm x 104mm

Product Code

577.800.066	DDM800 Fire & Gas Detector Module in EExd Housing
-------------	---

System 620 Fire Detection for Hazardous Areas



Features

- Conventional I.S. system
- Suitable for worst case (EEx ia IIC T5)
- High Performance Optical (HPO) smoke detector
- Compatible with S231i+ flame detector
- Compatible I.S. callpoint
- Suitable for use in Zone 0,1,2,20,21 & 22

System 620 Fire Detection

A complete range of ATEX and IECX certified detectors suitable for use in Zones 0,1,2,20,21 & 22 areas for use on conventional panels. There is a risk of fire or explosion in all areas containing flammable substances in the form of liquids, gasses, dust or materials. Where these combustible materials are mixed with air in sufficient concentration they form a flammable atmosphere and the areas containing them are designated Hazardous Areas. When a source of ignition, such as a spark, is applied in a hazardous area, an explosion could take place. Electrical equipment supplied for use in Hazardous Areas must comply with requirements to ensure that its introduction into the area does not increase the existing risk. System 620 is an Intrinsically Safe (I.S.) system for use in Hazardous Areas which can be connected to a conventional fire Alarm Controller installed in the Safe Area.

The System Designer must be familiar with ATEX certification and have successfully completed an appropriate recognised course in Intrinsic Safety. Design of the system requires that the designer has all the information concerning the installation correctly documented. The nature of the hazard must be defined by the customer and a survey carried out to determine the proximity of the safe area to establish cable runs.

The probability of a flammable mixture being present is defined by a Zone Number. Flammable gases are classified in Groups and their minimum spontaneous ignition temperature is categorised by Class. Tyco Safety Products supplied equipment marked EEx ia IIC T5 would be suitable for use in worst case conditions. Eg. Zone 0 (ia), Hydrogen (IIC), T5 (100 deg C). The Fire Alarm Equipment and Safety Barriers should be placed as near as possible to the containment wall of the Hazardous Area. This minimises the cable lengths between the barrier and the Hazardous Area and thus the capacity to store energy.

In order that an Installation will comply with the ATEX certification designated for each system it is essential that the certified devices are connected with cables of the specified limits. These limits have been certified for specific classifications of hazard in order that energy storage is limited.

The number of devices connected to the barrier and located in the Hazardous Area must always be limited to not more than the listed maximum.

When a mixture of devices is connected to any one zone the numbers must be reduced in proportion to the ratio of the load presented to the barrier. When a System includes the use of an S231i+, it must be remembered that the load it presents to the circuit is twice that of a detector. A mixture of large and small load devices connected to a zone will require a calculation for the number of allowed detectors.

System 620

System 620 is for use in conventional fire detection circuits. Two Sounder Systems, (one earthed and one isolated), are available and either can be used with System 620.

[Datasheet - PSF122U](#)

High Performance Optical Smoke



The MR601TEX has been developed to overcome the slower response of the optical detectors to hot burning fires, by increasing the sensitivity of the optical detector when it is associated with a rapid change in temperature. In this way it is intended to become a detector which can cover some of the risks currently covered by ion chamber detectors. Smoke detectors will not detect burning alcohol or other clean

burning liquids which do not generate smoke particles.

ATEX Code: Ex II 1GD
 Cenelec Code: Ex ia IIC T5/
 Ex iaD 20 T100°C
 Operating Temp Range: -10°C to +55°C
 Storage Temp: -20°C to +55°C
 Relative Humidity: 90% non-condensing

Product Code

516.054.011.Y (Vol 01B-04-D12)
 MR601TEX Conventional High Performance Optical Smoke Detector

Heat Detectors



If environmental conditions rule out the use of smoke detectors, then a heat detector of the type MD601EX/MD611EX may provide an acceptable, though less sensitive, alternative. For general use, and particularly where the ambient temperature may be low, a 'Rate-of-Rise' heat sensor is to be preferred. This type of sensor reacts to abnormally high rates of change of temperature and provides the fastest response over a wide range of

ambient temperatures. A fixed temperature limit is also incorporated in these detectors.

In many environments, e.g. kitchens and boiler rooms, sudden, large changes in temperature are considered 'normal'. Rate-of-rise detectors are generally not suitable in these cases and fixed temperature [static] types should be used.

ATEX Code : Ex II 1GD
 Cenelec Code: Ex ia IIC T5/
 Ex iaD 20 T100°C

Operating Temp Range: -10°C to +55°C
 Storage Temp: -20°C to +55°C
 Relative Humidity: 90% non-condensing

Product Codes

516.052.051.Y (Vol 01B-04-D11)
 MD601EX Conventional Rate of Rise Heat Detector
 516.052.041.Y (Vol 01B-04-D11)
 MD611EX Conventional Fixed Temperature Heat Detector

Flame Detectors



Flame detectors, unlike smoke and heat detectors, do not rely on convection to transport the fire products to the detector nor do they rely on a ceiling to trap the products. They can therefore be used to protect large open areas without sacrificing speed of response to flaming fires. In order to ensure full coverage however, flame detectors do require direct line of sight to all parts of the protected area.

Infra-red flame detectors such as the 601FEX are designed to respond rapidly to fires which involve

clean-burning fuels such as alcohol or methane, i.e. fires which would not be detected by smoke detectors. The 601FEX Flame Sensor, by virtue of its operating wavelength and flicker discrimination is insensitive to normal environmental influences. For outdoor use a solar-blind detector [e.g. the S200 Plus] should be used. The 601FEX Flame detector should, normally, only be used inside buildings to supplement heat and smoke detectors.

ATEX Code: Ex II 1GD
 Cenelec Code: Ex ia IIC T4/
 Ex iaD 20 T135°C
 Operating Temp Range: -10°C to +55°C
 Storage Temp: -20°C to +55°C
 Relative Humidity: 90% non-condensing

Product Codes

516.600.066 (Vol 01C-02-D10)
 601FEX Infra-Red Flame Detector
 516.600.067 (Vol 01C-02-D10)
 601FEX-M Infra-Red Flame Detector (Marine)

Enhanced Carbon Monoxide Fire & Heat Detector



The MDU601EX detector is a combined CO and Rate of Rise Heat Detector where the sensitivity of the CO detector is enhanced in response to a fast rate of change of temperature.

ATEX Code: Ex II 1GD
Cenelec Code: Ex ia IIC T5/
Ex iaD 20 T100°C

Operating Temp Range:
-10°C to +55°C
Storage Temp:
-20°C to +55°C
Relative Humidity:
90% non-condensing

Product Code

516.061.001.Y (Vol 01B-04-D14)
MDU 601EX Enhanced Carbon
Monoxide Fire & Heat Detector

5BEX Detector Base and Ancillaries



ATEX Code: Ex II 1GD
Cenelec Code: Ex ia IIC T5/
Ex iaD 20 T100°C

Operating Temp Range:
-10°C to +55°C
Storage Temp:
-20°C to +55°C
Relative Humidity:
90% non-condensing

Product Codes

517.050.023
5BEX 5" Universal Ex Base
517.050.603
DHM-5B deckhead mounting
517.001.120
System 601 EOL Unit (Pk 10)



Features

- Intrinsically Safe
- Weatherproof to IP67
- Compatible with System 620

Intrinsically Safe Callpoint - ATEX Approved

The MCP220Ex is a conventional callpoint for use on the ATEX Certified System.

Technical Specification

Dimensions:	93H x 98W x 66Dmm
Weight:	270g
Material:	PC/ABS
Conventional:	Yes
Colour:	Red
ATEX Code:	Ex II 1GD
CENELEC:	EX ia IIC T4 Ga /EX iaD T135°C Da
ATEX Cert:	SIRA 06ATEX2131X
IP Rating:	IP67

Product Code

514.001.109	MCP220Ex Red Callpoint intrinsically safe for use with ATEX certified conventional system 620.
-------------	--



Features

- Intrinsically safe
- Weatherproof to IP66/IP67
- Robust GRP Housing

BG3 Intrinsically Safe Conventional Callpoint -Atex Approved

This manual fire alarm call point is designed in accordance with the latest European Callpoint Standard (EN54-11).

Units are supplied in self coloured GRP with a 'Burning House' duty label as standard.

Weatherproof to IP66/IP67 and available certified intrinsically safe, simple apparatus manufactured from glass reinforced polyester (GRP) which provides a robust, corrosion free construction and ensures effective and reliable operation in harsh industrial and offshore environments.

Technical Specification

Model:	BG3I
Protection:	Explosion Protected EExia (Intrinsically Safe)
Certification:	CENELEC EN50014, 020 BASEEFA EExia IIC T4 Cert No. BAS00ATEX1067X Suitable for use in Zones 0,1 & 2
Voltage:	Up to 28V (IS)
Certified Temp:	-55°C to +55°C
Ingress Protection:	IP66 & IP67
European Standard for Callpoints:	EN54-11
Terminals:	6 X 4.0mm ²
Cable Entries:	2 X M20 Bottom
Weight:	0.5Kg
Material:	UV resistant glass reinforced polyester
Finish:	Natural Red GRP

Product Code

514.001.059 Intrinsically Safe Callpoint (BG3I4NBN)



Features

- Polyester Enclosure – light, strong and not subject to corrosion.
- Break Glass.
- Explosion protected EExe (ATEX Approved).
- In line and end of line resistors.
- Red.
- 9 x terminals.
- Lift flap for extra protection against inadvertent operation.
- 1 x changeover switch.
- Captive cover screws.
- No hammer required – the glass is covered by a membrane thus protecting the operator from glass fragments.
- Key operated test facility – simple but secure.
- 2 x M20 bottom cable entries.

BG Conventional Callpoint EX II 2 GD

This EX II 2 GD Dust Approved & Increased Safety (EExemd) Conventional Break Glass Manual Alarm Call Point is fitted with a 470 ohm Alarm Level Resistor and a 4K7 ohm EOL Resistor for use with Tyco Conventional Detection Circuits including the DIM800 and DDM800 MX Modules.

It is also fitted with a removable link which allows it to be connected on its own or with other Conventional Devices to a Tyco Conventional Detection Circuit.

Technical Specification

Protection:	Explosion Protected EExed (Increased Safety)
Certification:	ATEX approved Ex II 2 GD BAS02ATEX2105X EExedmIICT4 CENELEC EN50014 EN50019 EN50018 EN50028 Suitable for use in Zones 1 & 2
Voltage:	Up to 250V
Certified Temperature:	-20°C to +50°C
Ingress Protection:	IP66 & 67
Terminals:	9 x 2.5mm – up to 60V
Switch Ratings(1 x Changeover):	DC 0-30V 5A (Resistive) or 3A (Inductive) 30-50 1A Resistive or Inductive AC 0-254V 5A Resistive or Inductive
Cable Entries:	2 x M20 Bottom
Weight:	1.2Kg
Material:	Anti Static U.V. Resistant Glass Reinforced Polyester
Finish:	Red Epoxy Paint
Resistors:	Alarm: 470 Ohm EOL: 4K7 Ohm
Labelling:	Burning House Symbol

Product Code

514.001.108	EX II 2 GD Dust Approved & Increased Safety (EExemd) Conventional Break Glass Manual Alarm Callpoint
-------------	--



Banshee IS28

IS28VCL MK4 Banshee BS5839 Low Frequency ATEX and ITEX certified intrinsically safe grey sounder - 94dBA, 10mA. Certificate Number : ITS03ATEX21311x EXII 1GD EExia IIC T5.

Product Code

576.501.013 IS28VCL MK4 Banshee



XB8 Intrinsically Safe Beacon

This ruggedised, intrinsically safe and weatherproof beacon is intended for use in potentially explosive atmospheres, and has been designed with high ingress protection to cope with the harsh environmental conditions found offshore and onshore in the oil, gas and petrochemical industries.

Features

- Robust GRP Body
- Suitable for offshore and petrochem
- Certificated Intrinsically Safe

Please refer to MEDC for guidance on cable capacitance and barriers.

Technical Specification

Certification:	CENELEC EN50014, 20 & 39 BAS02ATEX1258X EExia IIB T4 Zones 0,1 & 2
Material:	UV stable glass reinforced polyester body. Clear polycarbonate cover/lens. Retained stainless steel cover screws.
Finish:	Painted Red
Tube Type:	Xenon discharge
Lens Colour:	Clear
Terminals:	8 x 2.5mm ²
Flash Rate:	1 flash per second
Cable Entries:	Up to 3 x M20 via knockouts
Tube Energy:	0.5 Joules
Weight:	1.4kg
Certified Temperature:	-55°C to + 60°C
Ingress Protection:	IP66 & IP67
Tube Life:	> 1 x 10 ⁶ Flashes
Voltage:	24V via suitable barrier
Current Consumption:	71mA max nominal

Product Code

540.001.038 Intrinsically Safe Xenon Beacon (XB8BB024CNR)



Features

- For use in hazardous areas
- Robust GRP construction
- Powerful Output, up to 115dBA

DB3 Flameproof Horn Sounder

This lightweight all GRP flameproof sounder is intended for use in potentially explosive gas and dust atmospheres and has been designed with high ingress protection to cope with the harsh environmental conditions found offshore and onshore in the oil, gas and petrochemical industries.

The flamepaths, flare and the body, are manufactured completely from a UV stable glass reinforced polyester. Stainless steel screws and sinter are incorporated thus ensuring a corrosion free product. A tapered flamepath is used to overcome the problems of assembly of parallel spigot flamepaths.

Technical Specification

Terminals: 6 x 2.5mm²
 Mounting: Stainless steel bracket with ratchet facility
 Cable Entries: 2 x 20mm EExd.
 Tone Selection: 27 user selectable tones.
 Certification: CENELEC EN50014,18,19
 BASEEFA Cert. No. BAS00ATEX2097X, EExd IIC 100°C (-55 t. amb + 55°C)T5. Zones 1 and 2.
 UL Listed: Class I Div 2, Groups A-D
 Class II Div 2, Groups F & G
 Class I Zones 1 & 2, AExd IIC T4. Listing No. E203310.
 GOST Certification: 1Exd IIC T4 & 1Exde IIC T4
 Cert. No. A-0759
 Russian Fire Alarm Approved (VNIIP0)
 GOST 'K' Certification Exd IIC T4
 Chinese (C&ST) Certification Exd IICT4
 Material: Body & horn in anti-static, UV stable, glass reinforced polyester. Swivel bracket & captive cover screws in stainless steel.
 Sound Output: 115dB(A) +/- 3dB(A) (tone dependent).

*Output measured with 24V input voltage. Tone set to 970Hz continuous.

Weight: 6.0kg approx
 Ingress Protection: IP66 & IP67
 Voltage: Up to 48Vdc
 Current
 Consumption: 380mA at 24Vdc

Certified Temperature:			
	EExd	UL	GOST Exd
DB3	-20°C	-55°C	-20°C
	to +70°C	to +70°C	to +50°C

Nominal Output (dBA)	Input Current (mA)*
93	50
105	100
108	150
111	200
112	250
114	300
115	350

Product Code

576.501.043 Flameproof Horn Sounder (DB3D048N2BNR)



Features

- Robust Corrosion Resistant GRP body
- High Power (5 Joule)
- Certificated Flameproof

XB11 Flameproof Xenon Beacon

These certified beacons have been designed for use in potentially explosive gas and dust atmospheres and harsh environmental conditions. The glass reinforced polyester enclosures are suitable for use offshore or onshore, where light weight combined with corrosion resistance is required.

The beacon housing is manufactured completely from a U.V. stable, glass reinforced polyester. Stainless steel screws and mounting bracket are incorporated ensuring a totally corrosion free product.

Technical Specification

Voltage:	24Vdc
Tube Energy:	5 Joules
Peak Current	
Consumption (mA):	320
Effective Intensity (Cd):	29
Peak Intensity (Cd):	22213
Power Consumption (Watts):	8
Note:	The Cd figures are for a clear lens @ 1Hz flash rate. For red lens multiple by 0.15
Weight:	2.5Kg
Certified Temperature:	EExd -55°C to + 70°C (T4) -55°C to + 55°C (T5) -55°C to + 40°C (T6)
Ingress Protection:	IP66 & IP67
Terminals:	6 x 2.5mm ²
Entries:	2 x 20mm ISO EExd.
Certification:	BASEEFA EExd IIB 135°C (-55 to AMB + 70°C)T4 100°C (-55 to AMB + 55°C)T5 85°C (-55 to AMB + 40°C)T6 Cert. No. 99 ATEX 2195X. CENELEC EN50014 and EN50018
Material	Body: Glass reinforced polyester Lens: Glass Cover Screws + Backstrap: Stainless steel 316 Finish: Red

Product Code

540.001.039 Flameproof Xenon Beacon (XB11B02406RNBNNNR)

Chapter 10 - Special Hazards

The following section relates to a range of intrinsically safe barrier and isolator equipment for use with Tyco Safety Products manufactured fire detection systems. It essentially encompasses the relevant MTL 5000 and MTL 7000 series barriers plus the associated housing options as an alternative to existing MTL 700 series equipment.

On all issues of intrinsically safe systems design, please refer to Manual 26A for guidance.

Intrinsically Safe Barriers - Atex Approved

Galvanic Isolators - MTL 5000



The MTL 5061 is a two channel interface for use with conventional fire and smoke detectors located in hazardous areas. This galvanic isolator is CE marked, and replaces the MTL 3043 barrier option. It is suitable for connecting loads in Zone 0, IIC, T4-6 hazardous areas if suitably certified.

The MTL 5021 Isolating sounder driver enables an intrinsically safe sounder device located in the hazardous area, to be controlled

from the safe area. The MTL 5021 barrier is designed as a CE marked replacement for the existing MTL 3021 barrier. It has one channel and is suitable for connecting loads in Zone 0, IIC, T4-6 hazardous area if suitably certified.

When designing new systems or upgrading existing MTL 3000 series systems to MTL 5000 series, please use the appropriate MTL "DX" series enclosure equipment (16.2mm pitch).

Product Codes

517.001.244

MTL 5061 2 channel galvanic isolator for conventional detector zone - used on BASEEFA Approved System 601

517.001.245

MTL 5021 I.S. Sounder driver

Zener Barriers - MTL 7700



The MTL 7700 Series intrinsically safe shunt-diode safety barriers are innovative devices designed to provide exceptionally high packing densities, straightforward installation and simplified connection, commissioning and maintenance facilities. The MTL 7700 Series include secondary replaceable fuses. These are useful where there is the possibility of faults occurring during commissioning, which would otherwise blow the barriers' internal safety fuses.

One secondary replaceable fuse for each barrier channel is provided and is lower in value than the safety related fuse. Fuses are packaged in small mouldings which can be latched in a disconnect position to break the safe and hazardous areas during commissioning, maintenance and fault finding, thus avoiding the need for additional disconnect terminals.

Please note that this barrier is a direct alternative for the MTL 728+ barrier.

Product Code

517.001.301

MTL 7728 + Zener Safety Barrier for conventional detection circuits designed in accordance with System 601

Zener Barriers - MTL 700



The MTL700 series are 1 or 2 channel devices which pass the electrical signal from fire detectors to the control panel or from the control panel to the output device. The barriers limit the amount of energy to a level that cannot ignite explosive atmospheres. The over-voltage protection provided by a Shunt-Diode Safety Barrier is with reference to the safety barrier earth connection. It is therefore imperative that a HIGH INTEGRITY EARTH is used for this type of barrier (14.2mm pitch).

Product Codes

517.001.201

MTL728 Single Channel Zener Safety Barrier

517.001.202

MTL788 Dual Channel Zener Safety Barrier

546.004.005

Intrinsically safe sounder circuit interface module

Safety Enclosures

UC Series Enclosures



The UC series of enclosures provides a simple but effective means of mounting and protecting the MTL3000 series units, in safe areas. A standard lightweight enclosure with transparent lid, which can accommodate 4 units. The polycarbonate enclosure is impact resistant, flame retardant and dustproof to IP65.

Product Code

517.001.196
UC2 4 Way Barrier Housing

MT Series Enclosures



The MT series of enclosures provides a simple, effective means of mounting and protecting MTL700 Series barriers in safe areas or low-risk hazardous areas. Three lightweight polycarbonate enclosures with see through lids accommodate up to 2, 5 and 12 barriers in the safe area. All the enclosures are supplied ready fitted with a nickel plated brass busbar mount, so barriers can be installed and wired up immediately without special tools.

Product Codes

517.001.198
MT2 2 Way Zener Barrier Housing.
517.001.199
MT5 5 Way Zener Barrier Housing.
517.001.200
MT12 12 Way Zener Barrier Housing

Ancillaries



The ERL7 earth rail is a nickel plated 3 x 10mm rail (1 metre long), suitable for a do-it-yourself mounting arrangement. It will accommodate up to 2.5 ETM7 earth terminals per barrier location for terminating earth returns and cable screens from the hazardous area.

The IMB7 mounts on a flat surface or top hat rail (35mm) or G-profile rail and acts as a convenient method for mounting the earth busbar.

Product Codes

517.001.205
ERL7 Earth rail for I.S. systems
517.001.206
ETM7 Earth termination connection system
517.001.207
IMB7 Insulating mounting block
517.001.120
System 601 EOL Unit (PK10)



Features

- Continuous detection despite extremely large monitoring area.
- Easy and rapid installation of the maintenance free sensor cable.
- Very high resistance to extreme ambient influences (immune against heat, cold, humidity, corrosion, strong winds and draft).
- Undiminished operation under electromagnetic interference.
- Unprecedented security against false alarms.
- Very high sensor cable service life of up to 30 years.
- Temperature profile over the complete measurement range delivers exact information of location, size and spread of fire.
- Very low maintenance costs as maintenance and trouble shooting can be done from the control unit.
- VdS certified to EN 54 part 5
- One controller unit will drive up to two 8 km spurs or one 8 km loop.
- Easy integration into existing installations.
- Each sensor cable divided into up to 256 zones.
- Individual configuration of 5 alarm criteria per zone.
- Network connection through Modbus, TCP/IP, FTP and SCPI interfaces.

MZX SensorLaser™ Plus Fibre Optic Linear Heat Detection System

The MZX SensorLaser™ Plus guarantees fast and continuous fire detection even in difficult and varying ambient conditions. This linear heat detection system enables long and heavily fragmented facilities such as traffic and supply tunnels, cable routes and conveyor belts as well as large scale buildings such as production halls, cold stores and multi storey car parks to be monitored at all times. The MZX SensorLaser™ Plus is ideal for use in areas that are hard or impossible to access after installation, e.g. false floors, since maintenance and troubleshooting can be carried out from the control unit.

The fibre optic sensor cable itself is maintenance free and, thanks to its particularly robust characteristics, offers a high level of security against false alarms. The sensor cable is insensitive to dust, dirt, moisture, high temperatures (up to approx. 90 °C), pressure and the action of vibration and wind as well as corrosive atmospheres. Because of its purely passive, optical analysis process, the MZX SensorLaser™ Plus is even immune from electromagnetic interference caused by generators, energy routes, cables or electric motors.

The MZX SensorLaser™ Plus delivers precise information about the location, size and spread of a fire even under ambient conditions that would cause other fire detection systems to fail.

The MZX SensorLaser™ Plus enables a measuring range of up to 8 km per sensor cable. Up to 2 spurs each with an 8 km measurement range, or 1 loop with an 8 km range can be connected. Since the ambient conditions in a monitoring area of this size can vary enormously, each sensor cable can be divided into up to 256 zones. Several alarm criteria can be freely defined in each zone. This level of precision adjustment allows the MZX SensorLaser™ Plus to provide a high level of resistance to false alarms and precise fire detection despite contrary and variable ambient conditions.

The accessible laser radiation emitted by the Class 1M laser is not hazardous to the eyes (provided there are no other optical instruments in the path of the beam), while operation is absolutely fail-safe even in the event of a break in the cable. In addition, the sensor cable can be used in explosive atmospheres (ATEX zones) up to zone 0 without any additional measures being required. In contrast to conventional fibre optic systems, the low laser output of < 20mW ensures that the measuring system has a long service life.

Zone Configuration

Ambient conditions (temperatures) can fluctuate sharply over a measuring range of many hundreds of metres. This makes it essential to divide the measuring range into zones that can be adapted optimally to the ambient conditions on the basis of differing alarm criteria. This ensures high detection reliability and also security against false alarms.

The MZX SensorLaser™ Plus allows the measuring range to be very finely divided into zones. Up to 256 zones can be defined for each sensor cable, with up to 5 alarm criteria configurable in each zone. Another 2 alarm criteria respond when there is a temperature drop, enabling them to be used e.g. in tunnels to warn of black ice.

Chapter 10 - Special Hazards

MZX SensorLaser™ Plus Fibre Optic Linear Heat Detection System Con't.

Control Unit

With ten product variants, permitting measuring ranges of 1 to 8 km, the MZX SensorLaser™ Plus can be configured to suit the particular project.

Sensor Cable

The sensor cables offered are optimised for a rapid response time. The sheathing is flame retardant, halogen free and resistant to dust, dirt, moisture, corrosive atmospheres and most organic solvents. Both types of sensor cable offer adequate protection against rodents and are designed for a service life of 30 years.

There are two different types of sensor cable for differing project requirements. The MZX SensorLaser™ Plus Safety cable can be used under normal ambient conditions. It is particularly flexible and extremely versatile.

Where the sensor cable is expected to be exposed to high mechanical stresses, we recommend that the MZX SensorLaser™ Plus Steel Wire Armoured cable be used. This sensor cable, which was specifically developed for heavy duty applications, is particularly suitable where high tensile forces and high lateral pressures can occur.

The cable length will be individually cut to the customer specified length and 2 connectors are fitted for easy handling. The cable should be commissioned in multiples of one metre and therefore the order for the cable has to be placed per metre.

Every order for sensor cable must include the corresponding connectors, which will be assembled by the supplier. The cable with pre assembled connectors offers fast commissioning of the system without any additional splicing.

Mounting Materials

For professional mounting of the sensor cables four different types of mounting sets are available. These sets are designed for different applications. They can be used for the mounting of the sensor cable to the wall and the ceiling. Every set contains 100 x clamps, 100 x anchors and 1 x SDS drill bit.

Plastic Clamps

The plastic of these clamps is UV resistant, halogen free and particularly robust in ambient conditions.

Steel Clamps

The clamps in these sets are made of stainless steel or zinc plated steel and are rubber protected. The rubber protection guarantees that the sensor cable is not damaged if friction occurs. For every clamp 2 x nuts are included for fixing to the anchor.


Connection Cable

Connection to the MZX Fire Alarm Panel is by means of the MZX SensorLaser™ Plus Connection Set. This set consists of 3 x cables. For connection of the Fire Alarm Panel to one end of the sensor cable a D-Sub connector is included. The other end of the sensor cable is desoldered which provides a quick connection into the MZX System without any soldering effort.

Enhanced Communication

The MZX SensorLaser™ Plus iBox allows the 20 relay outputs supplied as standard to be expanded up to 2 x 256 outputs so that each zone can be assigned its own relay output. This could, for instance, be used to control fire extinguishing systems. The iBox also enables connection to SCADA or process control systems via Modbus TCP or Modbus RTU.

The number of relays can be extended using the MZX SensorLaser™ Plus Relay Controller Set. This set consists of a pre-programmed field bus controller, one Digital Output Module and an End module. It also comes with 8 x relays and accessories for easy wiring.

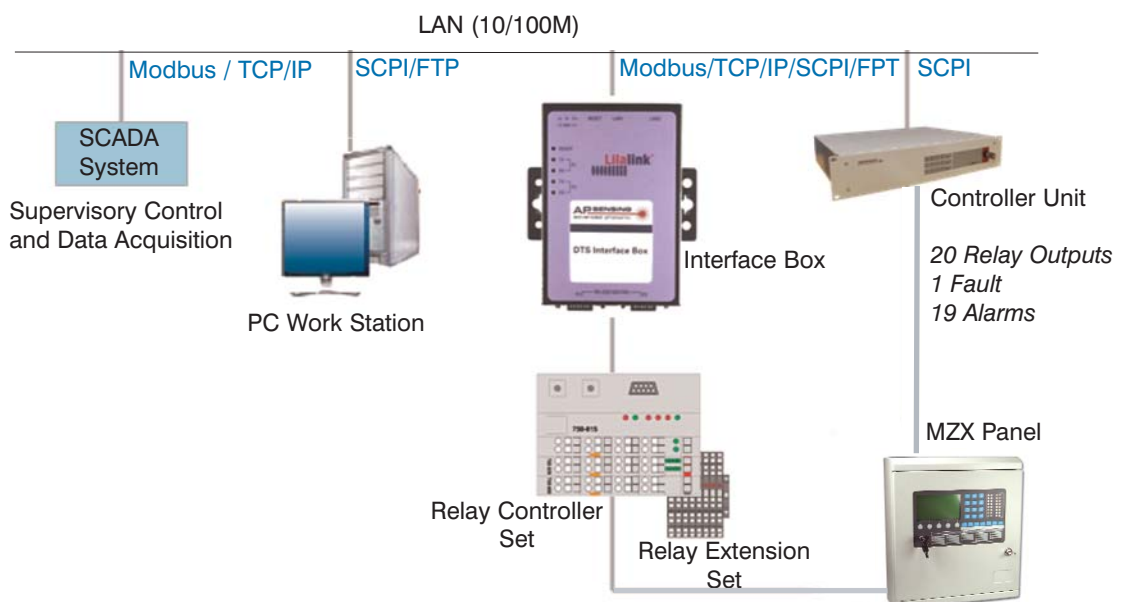

By means of the Relay Controller Set and the Relay Extension Set an additional 256 relays per sensor cable can be connected.

Chapter 10 - Special Hazards

MZX SensorLaser™ Plus Fibre Optic Linear Heat Detection System Con't.

Complies with the essential requirements of the following applicable European Directives and carries the CE marking accordingly:

- The Low Voltage Directive 73/23/EEC amended by 93/68/EEC
- The EMC Directive 2004/108/EC

Conforms with the following product standards:

EMC

IEC61326:1997+A1:1998+A2:2000
EN61326:1997+A1:1998+A2:2001
CISPR11:1997+A1:1999 / EN55011:1998+A1:1999
IEC61000-4-2:2001/EN61000-4-2:1995+A1:1998+A2:2001
IEC61000-4-3:2002/EN61000-4-3:2002
IEC61000-4-4:2001/EN61000-4-4:1995+A1:2001+A2:2001
IEC61000-4-5:2001/EN61000-4-5:1995+A1:2001
IEC61000-4-6:1995+A1:2000 /EN61000-4-6:1996+A1:2001
IEC61000-4-8:2001/EN61000-4-8:1993+A1:2001
IEC61000-4-11:1994+A1:2000
EN61000-4-11:1994+A1:2001
Canada: ICES-001:1998

Technical Specification

Operating temperature range:
-10°C to +60°C (2 channel options: from -5°C)

Storage temperature range:
-40°C to +80°C

Operating humidity range:
0% to 95% RH (2 channel options: 15% to 85% RH) non condensing

Dimensions (H x W x D):
88 x 448 x 364 mm (19" rack)

Weight:
9 kg

Fibre types:
MM 50/125 µm graded index MM
62.5/125 µm graded index

Dynamic range:
30 dB (2-way loss)

Sensing temperature range:
-273°C to +700°C depending on sensor coating

Optical connector:
E2000; 8° angled

Number of channels:
1, 2 depending on channel option

Computer interface:
USB, LAN

Relay board:
4 inputs / 20 outputs

Power supply:
10 V to 30 Vdc

Power consumption:
15 W typically, at 20°C ambient temperature < 40 W (entire operating conditions)

Measurement times:
from 10s to 30s

Available spatial resolution settings:
1 m; 1.5 m; 3 m; 5 m; 8 m

Available measurement modes:
Single ended/Dual ended;
including fibre break recovery

Internal data storage capability:
150 traces total

Power Supply (option) operating conditions:
0°C to +50°C; non condensing;
indoor use only

Laser class (IEC 60825-1: 2001):1M

SAFETY

IEC61010-1:2001/EN61010-1:2001
IEC60825-1:2001/EN60825-1:1994+A11:1996+A2:2001
Canada:CAN/CSA-C22.2No.61010-1:2004
USA:UL61010-1:2004;FDA21CFR1040.10+Laser Notice No.50

Product Codes

516.016.310	MZX SensorLaser™ Plus 1/1 – 1 km range, 1 sensor cable.
516.016.311	MZX SensorLaser™ Plus 1/2 – 1 km range, 2 sensor cables.
516.016.312	MZX SensorLaser™ Plus 2/1 – 2 km range, 1 sensor cable.
516.016.313	MZX SensorLaser™ Plus 2/2 – 2 km range, 2 sensor cables.
516.016.333	MZX SensorLaser™ Plus 3/1 – 3 km range, 1 sensor cable.
516.016.334	MZX SensorLaser™ Plus 3/2 – 3 km range, 2 sensor cables.
516.016.314	MZX SensorLaser™ Plus 4/1 – 4 km range, 1 sensor cable.
516.016.315	MZX SensorLaser™ Plus 4/2 – 4 km range, 2 sensor cables.
516.016.316	MZX SensorLaser™ Plus 8/1 – 8 km range, 1 sensor cable.
516.016.317	MZX SensorLaser™ Plus 8/2 – 8 km range, 2 sensor cables.
516.016.318	MZX SensorLaser™ Plus Connection Set.
516.016.319	MZX SensorLaser™ Plus iBox
516.016.320	MZX SensorLaser™ Plus Relay Controller Set.
516.016.321	MZX SensorLaser™ Plus Power Supply.
516.016.322	MZX SensorLaser™ Plus Safety Cable (per metre).
516.016.322.C	MZX SensorLaser™ Plus Safety Connector.
516.016.323	MZX Steel Wire Armoured SensorLaser™ Plus Cable (per metre).
516.016.323.C	MZX SensorLaser™ Plus Steel Connector.
516.016.324	MZX SensorLaser™ Plus Setting Tool.
516.016.325	MZX SensorLaser™ Plus Relay Extension Set.
516.016.326	MZX SensorLaser™ Plus Zinc Plastic Clamp Set.
516.016.327	MZX SensorLaser™ Plus Steel Plastic Clamp Set.
516.016.328	MZX SensorLaser™ Plus Steel Zinc Clamp Set.
516.016.329	MZX SensorLaser™ Plus Stainless Steel Clamp Set.
516.016.330	MZX SensorLaser™ Plus Spare Unit.
516.016.331	MZX SensorLaser™ Plus Demo Unit.
516.016.332	MZX SensorLaser™ Plus Demo Box.

MX Addressable Detector , Mode Selection & Design Charts

These charts are designed to assist with the selection of the best detector for the risk.

1. First select the environment
2. Then select the fire loading or risk being protected

ENVIRONMENT	VERY CLEAN AND DRY		BENIGN MODERATELY CLEAN REGULATED TEMPERATURE		DIRTY - SMOKY DURING THE DAY		DUSTY AND/OR HUMID		HOT AND SMOKY WHEN IN USE		OPEN AREAS	
	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY
FOR EXAMPLE	CLEAN ROOM	OFFICES, HOSPITALS, LIGHT INDUSTRIAL, RESIDENTIAL, PASSENGER CABIN	WAREHOUSE WITH DIESEL FORK-LIFTS etc. HEAVY INDUSTRIAL FERRY (CAR DECK)	LIVESTOCK PEN MILL, LAUNDRY, CHANGING ROOM	KITCHEN, ENGINE ROOM, TEST BEDS	ATRIUM, THEATRE, HANGER, OIL RIGS, TURBINE HALL						
FIRE LOADING	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY	TOXIC GAS	MODE NIGHT DAY
ELECTRONIC EQUIPMENT												
ELECTRICAL SWITCHGEAR												
ELECTRIC MOTORS												
CABLE CONDUIT												
FABRICS, CLOTHES												
SOFT FURNISHINGS												
PAPER, CARDBOARD												
PLASTIC FOAMS												
ANIMAL BEDDING												
WOOD SHAVINGS etc.												
FLAMMABLE LIQUIDS												
PAINTS,												
SOLVENTS												
FLAMMABLE GASSES												
UNSTABLE CHEMICALS												
FOODSTUFFS												
GENERAL ORGANIC WASTE												
ANIMAL FODDER												
WOODEN STRUCTURES												
SOLID FUELS												
PLASTIC												
CHEMICALS												
MACHINERY												
BUILDING MATERIALS												
UNKNOWN CONTENTS												

Bold text indicates most likely detector/mode to meet user's requirements. Letters in brackets represent possible options if gas detection is required.

- Mode 0 - Universal
- Mode 1 - High Resilience
- Mode 2 - Heat R-o-R
- Mode 3 - HPO
- Mode 4 - CCO
- Mode 5 - Gas

Table is for guidelines only and specific situations are likely to require variations on the suggested detector types. Customer knowledge of relative impact of false alarm vs undetected fires should be considered. Night and Day columns represent low false alarm risk and high false alarm risk, although this usually follows a day/night pattern, it may be configured for any time. For example the car deck of a ferry would be configured for Day during vehicle loading and Night once all the passengers had left the car deck, thus achieving optimum protection for that area.

Table 1 - 801PC Detector

ENVIRONMENT	VERY CLEAN AND DRY	BENIGN				DIRTY - SMOKY DURING THE DAY	DUSTY AND/OR HUMID	HOT AND SMOKY WHEN IN USE	OPEN AREAS			
		MODERATELY CLEAN REGULATED TEMPERATURE		MODERATELY CLEAN								
FOR EXAMPLE	CLEAN ROOM DATA PROCESSING SUITE	OFFICES, HOSPITALS, LIGHT INDUSTRIAL, RESIDENTIAL, PASSENGER CABIN		WAREHOUSE WITH DIESEL FORK-LIFTS etc. HEAVY INDUSTRIAL FERRY (CAR DECK)		LIVESTOCK PEN MILL, LAUNDRY, CHANGING ROOM		KITCHEN, ENGINE ROOM, TEST BEDS		ATRIUM, THEATRE, HANGER, OIL RIGS, TURBINE HALL		
FIRE LOADING	TYPE	MODE	NIGHT	DAY	TYPE	MODE	NIGHT	DAY	TYPE	MODE	NIGHT	DAY
ELECTRONIC EQUIPMENT	ASPIRATED		E(H)	(N)	OPTICAL	E(N)			OPTICAL	E+(N)		X
ELECTRICAL SWITCHGEAR	OPTICAL		(H)	(N)	ION	(H)						
ELECTRIC MOTORS	ION		E+(H)	(H)								
CABLE CONDUIT			(H)									
FABRICS, CLOTHES												
SOFT FURNISHINGS												
PAPER, CARDBOARD												
PLASTIC FOAMS												
ANIMAL BEDDING												
WOOD SHAVINGS etc.												
FLAMMABLE LIQUIDS	FLAME		E+(H)	E+(H)	OPTICAL	E(N)	(N)	(N)	CO	E+(N)	(N)	(H)
PAINTS,	OPTICAL		E+(H)	E+(H)	FLAME	E+(N)	(N)	(N)	HEAT	E+(N)	(N)	(H)
SOLVENTS	CO		E+(H)	E+(H)	ION	(H)			ION	E+(H)	(H)	
FLAMMABLE GASSES	ION		(H)	(H)					HEAT	E+(H)	(H)	
UNSTABLE CHEMICALS												
FOODSTUFFS												
GENERAL ORGANIC WASTE												
ANIMAL FODDER												
WOODEN STRUCTURES												
SOLID FUELS												
PLASTIC	ASPIRATED		E+(H)	E+(H)	OPTICAL	E+(N)	(N)	(N)	CO	E+(N)	(N)	(H)
CHEMICALS	CO		E+(H)	E+(H)	FLAME	E+(N)	(N)	(N)	HEAT	E+(N)	(N)	(H)
MACHINERY	OPTICAL		E+(H)	E+(H)	ION	(H)			ION	E+(H)	(H)	
BUILDING MATERIALS			E+(H)	E+(H)	HEAT	A1R			HEAT	E+(H)	(H)	
UNKNOWN CONTENTS					ASPIRATED	A1R			FLAME	E+(H)	(H)	

E= Temperature enhanced

E+H= Temperature enhanced and heat detector together

H= Heat only part of combined detector

X= Callpoint protection alone

Table is for guidelines only and specific situations are likely to require variations on the suggested detector types. Real situations may require detector combinations to cover all likely risks.

Night and Day columns represent low false alarm risk and high false alarm risk, although this usually follows a day/night pattern, it may be configured for any time. For example the car deck of a ferry would be configured for Day during vehicle loading and Night once all the passengers had left the car deck, thus achieving optimum protection for that area.

If Fastlogic operation is selected for optical detectors the same table applies. The chief difference being a higher resistance to false alarms, and slower response to aerosol test gas.

Table 2 - 800 Series Detectors

Table 2 - 800 Series Detectors

Table 2 indicates most likely detector/mode to meet user's requirements.

Letters in brackets represent recommended sensitivity settings.

Not LPCB approved.

Conventional Detector Selection & Design Charts

ENVIRONMENT		A	B	C	D	E	F
ENVIRONMENT		VERY CLEAN AND DRY	MODERATELY CLEAN REGULATED TEMPERATURE	DIRTY - SMOKY	DUSTY AND/OR HUMID	HOT AND SMOKY	OPEN AREAS
FOR EXAMPLE		CLEAN ROOM DATA PROCESSING SUITE	OFFICES, LIGHT INDUSTRIAL, HOSPITALS, RESIDENTIAL, PASSENGER ACCOMMODATION	LOADING BAY/ WAREHOUSE WITH DIESEL FORK-LIFTS etc.	LIVESTOCK PEN MILL, LAUNDRY, CHANGING ROOM	KITCHEN, ENGINE ROOM, ENGINE TEST BEDS	ATRIUM, THEATRE, HANGAR, OIL RIGS, TURBINE HALL
FIRE LOADING	PROBABLE RISK						
1	ELECTRONIC EQUIPMENT ELECTRICAL SWITCHGEAR ELECTRIC MOTORS CABLE CONDUIT	ASPIRATED Optical HPO Ion	Optical HPO ion	Optical			Flame BEAM
2	FABRICS, CLOTHES SOFT FURNISHINGS PAPER, CARDBOARD PLASTIC FOAMS ANIMAL BEDDING WOOD SHAVINGS etc.		CO HPO Optical	CO Optical	CO Optical	CO	CO BEAM
3	FLAMMABLE LIQUIDS PAINTS, SOLVENTS FLAMMABLE GASSES UNSTABLE CHEMICALS FOODSTUFFS	Flame Ion HPO Optical	Flame Ion HPO Optical	Heat (A1R) Flame Ion	Heat (A1R) Flame	Flame Heat R-o-R	Flame
4	GENERAL ORGANIC WASTE ANIMAL FODDER WOODEN STRUCTURES SOLID FUELS		HPO Optical CO Ion	HPO CO Heat R-o-R	CO Optical Heat R-o-R	Heat R-o-R CO	CO Flame
5	PLASTIC, CHEMICALS MACHINERY BUILDING MATERIALS UNKNOWN CONTENTS	ASPIRATED HPO CO Optical Ion	HPO Co Ion Heat R-o-R Flame	Optical Co Ion Flame Heat R-o-R	Co Optical Flame	Heat R-o-R CO	Flame CO BEAM

Table 3 - Series 600 Detectors

MKII Sounder Base Application Table

PART NO.	DESCRIPTION	CONTROL PANEL COMPATIBILITY	POWERED FROM	DETECTOR REQUIRED TO OPERATE	PARK CLIP COLOUR
577.001.035	601SB CONVENTIONAL SOUNDER BASE	CONVENTIONAL ONLY	24Vdc	NO	GREEN
577.001.037	601SBD CONVENTIONAL DIODE SOUNDER BASE	CONVENTIONAL ONLY	24Vdc	NO	GREEN
516.800.911	901SB UNIVERSAL SOUNDER BASE	MINERVA ADDRESSABLE/MX	24Vdc	YES	BLUE
516.800.912	912SB UNIVERSAL UL SOUNDER BASE	MINERVA ADDRESSABLE/MX	24Vdc	YES	BLUE
577.001.036	602SB 2 WIRE LINE POWERED SOUNDER BASE	MZX-c ONLY	DETECTION CIRCUIT	NO	YELLOW
577.001.038	602SBD 2 WIRE LINE POWERED DIODE SOUNDER BASE	MZX-c ONLY	DETECTION CIRCUIT	NO	YELLOW
516.800.910	802SB MX LOW POWERED SOUNDER BASE	MX ONLY	LOOP	YES	WHITE
516.800.913	812SB LOOP POWERED UL SOUNDER BASE	MX ONLY	LOOP	YES	WHITE

PART NO.	DESCRIPTION	CURRENT CONSUMPTION AT 68 dBA (MINIMUM VOLUME)	CURRENT CONSUMPTION AT 90 dBA (MAXIMUM VOLUME)	CURRENT CONSUMPTION AT 100dBA (FIXED VOLUME)
577.001.035	601SB CONVENTIONAL SOUNDER BASE	1.2mA	6.8mA	
577.001.037	601SBD CONVENTIONAL DIODE SOUNDER BASE	1.2mA	6.8mA	
516.800.911	901SB UNIVERSAL SOUNDER BASE	1.2mA	6.8mA	
516.800.912	912SB UNIVERSAL UL SOUNDER BASE	1.2mA	6.8mA	21mA
577.001.036	602SB 2 WIRE LINE POWERED SOUNDER BASE	1.2mA	6.8mA	
577.001.038	602SBD 2 WIRE LINE POWERED DIODE SOUNDER BASE	1.2mA	6.8mA	
516.800.910	802SB MX LOW POWERED SOUNDER BASE	1.2mA	6.8mA	
516.800.913	812SB LOOP POWERED UL SOUNDER BASE			21mA

PART NO.	DESCRIPTION	DUTCH SLOW SWEEP (7)	TEMPORAL 4	SLOW SWEEP (3)	MARCH TIME BEEP (25)	MARCH TIME BEEP (26)
577.001.035	601SB CONVENTIONAL SOUNDER BASE	YES	YES	YES	YES	
577.001.037	601SBD CONVENTIONAL DIODE SOUNDER BASE	YES	YES	YES	YES	
516.800.911	901SB UNIVERSAL SOUNDER BASE	YES	YES	YES	YES	
516.800.912	912SB UNIVERSAL UL SOUNDER BASE	YES	YES	YES	YES	YES
577.001.036	602SB 2 WIRE LINE POWERED SOUNDER BASE	YES	YES	YES	YES	
577.001.038	602SBD 2 WIRE LINE POWERED DIODE SOUNDER BASE	YES	YES	YES	YES	
516.800.910	802SB MX LOW POWERED SOUNDER BASE	YES	YES	YES	YES	
516.800.913	812SB LOOP POWERED UL SOUNDER BASE	YES	YES	YES	YES	YES

MKII Sounder Base Application Table

PART NO.	DESCRIPTION	FAST SWEEP (2)	TEMPORAL 3	ALTERNATING 2(11)	ALTERNATING 2 (9)	CONTINUOUS(14)	CONTINUOUS
577.001.035	601SB CONVENTIONAL SOUNDER BASE	YES	YES	YES	YES	YES	
577.001.037	601SBD CONVENTIONAL DIODE SOUNDER BASE	YES	YES	YES	YES	YES	
516.800.911	901SB UNIVERSAL SOUNDER BASE	YES	YES	YES	YES	YES	
516.800.912	912SB UNIVERSAL UL SOUNDER BASE	YES	YES	YES	YES	YES	YES
577.001.036	602SB 2 WIRE LINE POWERED SOUNDER BASE	YES	YES	YES	YES	YES	
577.001.038	602SBD 2 WIRE LINE POWERED DIODE SOUNDER BASE	YES	YES	YES	YES	YES	
516.800.910	802SB MX LOW POWERED SOUNDER BASE	YES	YES	YES	YES	YES	
516.800.913	812SB LOOP POWERED UL SOUNDER BASE	YES	YES	YES	YES	YES	YES

(2) (3) (7) (9) (11) (14) (25) (26) = ROSHNI TONE NUMBER

Sounder Tone Tables

Tone Information			Banshee 12V			Banshee 24V		
No.	Description	Frequency and Timing	2nd Tone	dBa (Typ)	mA(Typ)	dBA(Typ)	mA(Typ)	12345
1	Banshee LF Buzz	800Hz ato 950Hz swept at 120Hz*	4	94	6	100	12	00000
2	Banshee LF Fast Sweep	800Hz to 950 swept at 9Hz*	4	94	6	100	12	10000
3	Banshee LF Slow Sweep	800Hz to 950Hz swept at 3Hz*	4	94	6	100	12	01000
4	Banshee LF Continuous	Continuous at 850Hz*	4	95	6	101	12	11000
5	Banshee LF Fast Sweep (New)	830Hz to 970Hz swept at 9Hz*	4	95	6	101	12	00100
6	Medium Sweep LF	800Hz to 970Hz swept at 1 Hz*	7	95	6	102	12	10100
7	Continuous LF	Continuous at 970Hz*	7	97	6	103	12	01100
8	Backup Alarm LF	Intermittent at 950Hz 1s on, 1s off*	4	97	4	103	7	11100
9	Alternate LF	Alternating 800Hz/1000Hz,0.5s each sound*	4	94	8	101	14	00010
10	Medium Sweep LF	800Hz/1000Hz swept at 0.5s*	4	95	5	101	12	10010
11	Alternate LF	Alternating tones 800/950Hz*	4	96	6	103	14	01010
12	Banshee/Bedlam HF buzz	2400Hz to 2900Hz at 120Hz	15	102	12	110	25	11010
13	Banshee/Bedlam HF Fast Sweep	2400Hz to 2900Hz at 9Hz	15	103	12	110	25	00110
14	Banshee/Bedlam HF Slow Sweep	2400Hz to 2900Hz at 3Hz	15	103	12	110	25	10110
15	Banshee/Bedlam HF Continuous	Continuous at 2900Hz at 3Hz	15	105	12	112	30	01110
16	Banshee/Bedlam HF Fast Sweep (New)	2450Hz to 3100Hz swept at 9Hz	15	103	12	110	25	11110
17	Back up Alarm LF	Intermittent at 2900Hz 1s on 1s off	15	105	7	112	15	00001
18	Alternate LF	Alternating tones 2400/2900Hz at 3Hz	15	104	12	110	25	10001
19	Slow Whoop	500Hz rising to 1200Hz over 3.5, silence 0.5s, repeat	4	96	6	101	12	01001
20	Din Tone (DK)	1200Hz falling to 500Hz over 1s, silence 10ms, repeat	4	93	6	101	14	11001
21	French Fire Sound	554Hz for 100ms and 440Hz for 400ms	4	90	5	96	10	00101
22	Australian Alert Signal	420Hz repeating 0.625s on, 0.625s off	4	88	3	94	6	10101
23	Australian Evacuation Signal	500Hz rising to 1200Hz over 3.75s on, 0.25s off	4	96	6	103	12	01101
24	US Temporal Tone LF	950Hz for 0.5s on 0.5s off, for 3 phases, silence for 1.5s & repeat	4	96	3	103	6	11101
25	US Temporal Tone HF	2900Hz for 0.5s on 0.5s off, for 3 phases, silence for 1.5s & repeat	15	105	6	112	12	00011
26	Swedish Tone (Fire)	Intermittent 660Hz 150ms on, 150ms off	26	81	4	87	7	10011
27	Swedish Tone (all Clear)	Continuous 660Hz	27	84	5	89	14	01011
28	ISO8201LF	Intermittent 970Hz 500ms on, 550ms off*	28	96	4	103	7	11011
29	ISO8201HF	Intermittent 2900Hz 500ms on, 500ms off	29	106	8	112	15	00111
30	BT Banshee (FP1063.1)	Yodel 800Hz/1000Hz, 0.25s each frequency*	31	93	8	101	14	10111
31	BT Banshee (FP1063.1)	Continuous 1000Hz*	31	95	8	102	17	01111
32	Bell Tone	Bell Tone*	32	96	8	101	17	11111

*Tone meets frequency requirements of BS5839 Pt. 1 1988


Chapter 11 - Useful Information

Fulleon Sounder Tone Compatibility Table

Fulleon Tone	Tone Number	2 Wire Symphoni	24V Symphoni	Sounder Base 601SB/601SBD 602SB/602SBD
		SWITCH A B	SWITCH 1 2 3 4 5	SWITCH 1 2 3 4
CONTINUOUS TONE (970HZ)	14	1 0	10010	111X (880Hz)
PULSED/INTERMITTENT TONE (970HZ@ 1HZ)	25	1 1	00111	011X (880Hz@1Hz)EURO ONLY
ALTERNATING TONE (970HZ/800HZ@2HZ) (CLOSEST MATCH)	1	0 1 (990HZ/650HZ@2HZ)	11111	N/A
DUTCH SLOW WHOOP (500Hz-1200Hz-3s on/0.5s off)	7	N/A	11001	000X
SLOW SWEEP (800Hz/970Hz@1Hz)	3	N/A	11101	010X
FAST SWEEP (800Hz/970Hz@7HZ)	2	N/A	11110	100X
TWO TONE/ALTERNATING (800HZ/970HZ@1HZ)	11	N/A	10101	110X (660Hz/880Hz@1Hz)EURO ONLY

Fulleon Sounder Tone Table

No.	TONE
1	ALT TONES 800/970 at 1/4 Hz
2	SWEEPING 800/970Hz at 7Hz
3	SWEEPING 800/970Hz at 1Hz
4	CONTINUOUS at 2850Hz
5	SWEEPING 2400-2850Hz at 7Hz
6	SWEEPING 2400-2850Hz at 1Hz
7	SLOW WHOOP
8	SWEEP 1200-500 at 1Hz
9	ALT TONES 2400/2850 2Hz
10	INT TONE OF 970Hz at 1Hz
11	ALT TONES 800/970 Hz at 1Hz
12	INT TONE at 2850 Hz at 1Hz
13	970Hz at 1/4 SEC. ON 1 SEC. OFF
14	CONTINUOUS AT 970Hz
15	554 FOR 100ms and 440Hz FOR 400ms
16	INT 660Hz 150ms ON/150ms OFF
17	INT 660Hz 1.8s ON/1.8s OFF
18	INT 660Hz 6.5s ON/13s OFF
19	CONTINUOUS 660Hz
20	ALT 554/440Hz at 1Hz
21	INT 660Hz 1Hz
22	INT 2850Hz 150ms ON 100ms OFF
23	SWEEP 800-970Hz at 50Hz
24	SWEEP 2400-2850Z at 50 Hz
25	INTERMITTENT 970Hz 500ms ON 500ms OFF
26	INTERMITTENT 2850HZ 500ms ON 500ms OFF
27	CONTINUOUS AT 4kHz
28	ALTERNATING TONES 800/970 AT 2Hz
29	ALTERNATING TONES 988/645 AT 2Hz
30	ALTERNATING 510/610 at 1Hz
31	SWEEPING 300-1200 at 1Hz
32	CONTINUOUS AT 4kHz

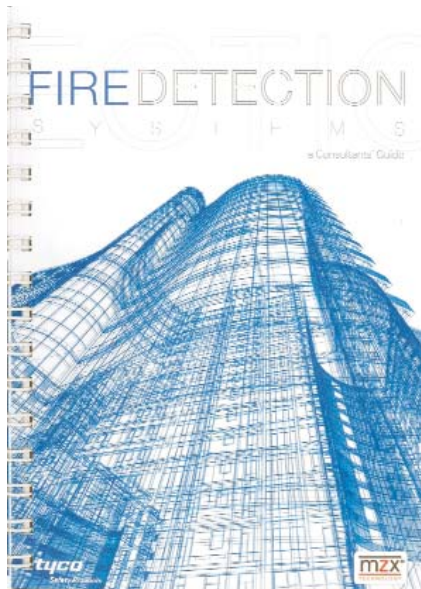

Consultants Guide

A Fire Detection System Consultants Guide for consultants designing systems to BS5839-1:2002.

Features

- Selecting the category of protection and coverage.
- How to configure detector zones and alarm zones within premises.
- Which type of fire detection system?
- Detector suitability.
- Detector coverage.
- Manual break glass call points.
- Limitation of false alarms.
- Means of giving warning to occupants.
- Control and indicating equipment.
- Power supplies.
- Cabling considerations.
- Communication with the fire service.
- System installation.
- Documentation.
- Standards and Specifications.
- Associated Ancillary Equipment.
- Networking and Graphics.
- Installation.
- Commissioning.
- Training.
- Maintenance.

Product Code

CGUK-01 Consultants Guide



European Distribution Centre - Echt, Holland

(Warehousing / Distribution / Purchasing /
Customer Service / Call Centre Helpdesk)

Voltaweg 20

6101 XK

Echt

Holland

Tel: +31 475 371 666

Fax: +31 475 371 660

E-mail: tfseu.service@tycoint.com

European TSP Technical Support Call Centre

Toll Free: 0800 CALL TYCO or
(0800 22 55 89 26)

9:00 AM to 5:00 PM EET, CET & GMT

UK Only: 08701 238 787

UK Distribution Centre

(Warehousing / Distribution / Purchasing)

Dunhams Lane

Letchworth

Hertfordshire

SG6 1BE

United Kingdom

Tel: +44 (0) 1462 667 700

Fax: +44 (0) 1462 667 777

E-mail: tfsuk.service@tycoint.com

www.tycoemea.com

© 2010 Tyco International PMCO01 Issue 7.7 / 09.10

The right is reserved to modify or withdraw any product or service without notice

a vital part of your world